




# Quectel EC200U Series

## IoT/M2M-optimized LTE Cat 1 Module

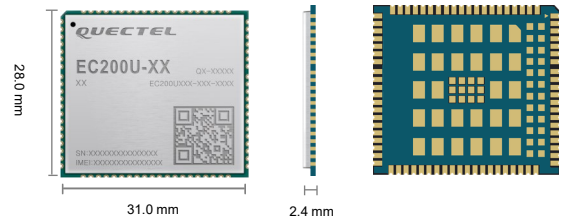

Quectel EC200U is a series of the latest LTE Cat 1 module optimized specially for M2M and IoT applications. It delivers maximum data rates up to 10 Mbps downlink and 5 Mbps uplink. Designed in the compact and unified form factor, EC200U series is compatible with Quectel multi-mode LTE Standard EC25 series /EC21 series/EC20 R2.1/EC20-CN/EC200T series/EC200S series/EC25-G/EC21-G and UMTS/HSPA+ UC200T series, ensuring that it can easily migrate from 3G to 4G network. EC200U series also supports standard Mini PCIe packages to meet the needs of different industry applications.

EC200U series contains two variants: EC200U-CN and EC200U-EU\*, which meets the frequency band coverage of different countries and regions. Adopting laser engraving process, EC200U series features a more fashionable appearance, strong metallic texture, better heat dissipation capability and durable label information, which makes it ideally suited for automation requirement.

EC200U series has a rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB drivers for Windows 7/8/8.1/10, Linux, Android) extend the applicability of the module to a wide range of M2M and IoT applications such as POS/POC/ETC, shared equipment, data card, energy control and monitoring, security and protection, and industrial PDA.



### Key Features

- ✓ LTE Cat 1 module optimized for M2M and IoT applications
- ✓ Worldwide LTE, GSM/GPRS coverage
- ✓ Abundant functional interfaces
- ✓ Support analog audio
- ✓ Built-in GNSS
- ✓ Feature refinements: supports FOTA, Wi-Fi scan and Bluetooth
- ✓ High performance



LTE Cat 1

Max. 10 Mbps (DL)  
Max. 5 Mbps (UL)



LCC Package



Embedded Abundant  
Protocols



Wi-Fi Scan



Bluetooth



Multi-constellation  
GNSS



FOTA



Quectel Enhanced  
AT Commands



USB 2.0 High Speed  
Interface

Version: 1.0.0 | Status: Preliminary

# Quectel EC200U Series

LTE Cat 1	EC200U-CN	EC200U-EU*
Region/Operator	China	Global
Dimensions (mm)	28.0 × 31.0 × 2.4	28.0 × 31.0 × 2.4
Temperature Range		
Operating Temperature	-35 °C to +75 °C	-35 °C to +75 °C
Extended Temperature	-40 °C to +85 °C	-40 °C to +85 °C
Frequency Bands		
LTE-FDD	B1/B3/B5/B8	B1/B3/B5/B7/B8/B20/B28
LTE-TDD	B34/B38/B39/B40/B41	B38/B40/B41
GSM	B3/B8	B2/B3/B5/B8
GNSS	GPS/Beidou	GPS/Beidou
BT	Bluetooth 4.2 (BR/EDR)	Bluetooth 4.2 (BR/EDR)
Wi-Fi	2.4 GHz 11b(RX)	2.4 GHz 11b(RX)
Bandwidth	1.4/3/5/10/15/20 MHz	1.4/3/5/10/15/20 MHz
Certifications		
Regulatory	SRRC/ NAL/ CCC (China)	CE* (Europe) RCM* (Australia/ New Zealand)
Carrier	China Mobile*/ China Unicom* (China)	
Others		
Max. Data Rate		
LTE-FDD (Mbps)	10 (DL)/ 5 (UL)	10 (DL)/ 5( UL)
LTE-TDD (Mbps)	8.96 (DL)/ 3.1 (UL)	8.96 (DL)/ 3.1 (UL)
GSM (Kbps)	85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)
Interfaces		
(U)SIM	× 1	× 1
UART	× 3	× 3
USB 2.0	× 1	× 1
Audio Digital (PCM)	× 1	× 1
Audio Analog	× 1	× 1
ADC	× 3	× 3
I2C	× 2	× 2
LCD	× 1	× 1
SDIO	× 2	× 2
Antenna Interfaces	× 3	× 3
Enhanced Features		
FOTA	●	●
BT	●	●
GNSS	Optional	Optional
(U)SIM Card Detection	●	●
Software Features		
RIL Driver	Android 4.x–10.x	Android 4.x–10.x
USB RNDIS Driver	Windows 7/8/8.1/10, Linux 2.6–5.10	Windows 7/8/8.1/10, Linux 2.6–5.10
GNSS Driver	Android 4.x–10.x	Android 4.x–10.x
USB MBIM Driver	Windows 8/8.1/10, Linux 3.18~5.10	Windows 8/8.1/10, Linux 3.18–5.10
USB ECM Driver	Linux 2.6–5.10	Linux 2.6–5.10
USB NCM Driver	Linux 2.6–5.10	Linux 2.6–5.10
USB Serial Driver	Windows 7/8/8.1/10, Linux 2.6–5.10, Android 4.x–10.x	Windows 7/8/8.1/10, Linux 2.6–5.10, Android 4.x–10.x
Electrical Features		
Supply Voltage Range	3.3–4.3V, 3.8 V Typ.	3.3–4.3 V, 3.8 V Typ.
Power Consumption (Typical)	12 µA @ Power off 1.7 mA @ LTE sleep (PF = 128) 1.4 mA @ LTE sleep (PF = 256) 28 mA @ Idle (PF = 64, USB Connection) 13 mA @ Idle (PF = 64, USB Disconnection)	12 µA @ power off 1.7 mA @ LTE sleep (PF = 128) 1.4 mA @ LTE sleep (PF = 256) 28 mA @ Idle (PF = 64, USB Connection) 13 mA @ Idle (PF = 64, USB Disconnection)

#### Notes:

- \* means under development/planning.
- means supported.