

ROCKER SWITCH MODEL MR-3

RATING: 10A 125/250VAC, (UL)

13A 125VAC, (CSA)

10A 250VAC, (CSA)

1/2HP 125/250VAC, (CSA)


10(4)A 250V~UT85 (VDE, SEMKO, DEMKO, NEMKO, FIMKO, SEV)

CIRCUIT: DOUBLE POLE DOUBLE THROW


CONTACT RESISTANCE: 20mΩ (MAX),

INSULATION RESISTANCE: 100MΩ (MIN), DC 500V

DIELECTRIC STRENGTH: 1000VAC

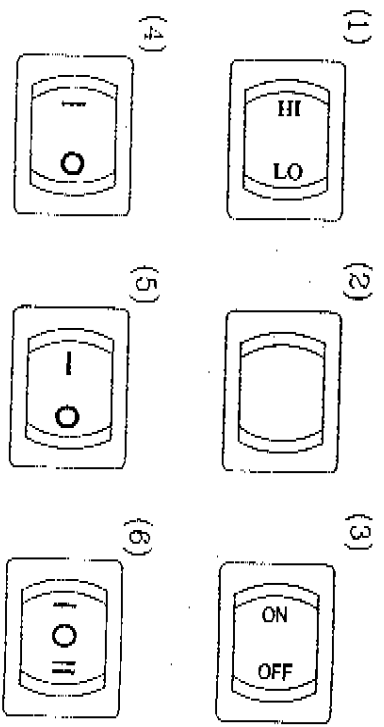

SCALE: 1/2



(CUTOUT DIMENSION)	(MOUNTING HOLE DIMENSION)	(SPACING DIMENSION)	(MOUNTING HOLE DIMENSION)
16.00-16.00 mm	12.90-12.90 mm	0.75-1.25 mm	15.42-15.42 mm
15.42-15.42 mm	12.30-12.30 mm	1.25-1.25 mm	14.82-14.82 mm
14.82-14.82 mm	11.70-11.70 mm	2-2 mm	14.22-14.22 mm

PANEL CUTOUT DIMENSION TABLE

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.12 (in/mm) 0.3

REVISION	DESCRIPTION	REVISED BY	TOLERANCES X	ANGLE	UNIT	PART NAME	DWG NO
1					mm	MR3 SPEC DRAWING	S0150A
2							
3							
4							
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							
35							
36							
37							
38							
39							
40							
41							
42							
43							
44							
45							
46							
47							
48							
49							
50							
51							
52							
53							
54							
55							
56							
57							
58							
59							
60							
61							
62							
63							
64							
65							
66							
67							
68							
69							
70							
71							
72							
73							
74							
75							
76							
77							
78							
79							
80							
81							
82							
83							
84							
85							
86							
87							
88							
89							
90							
91							
92							
93							
94							
95							
96							
97							
98							
99							
100							