
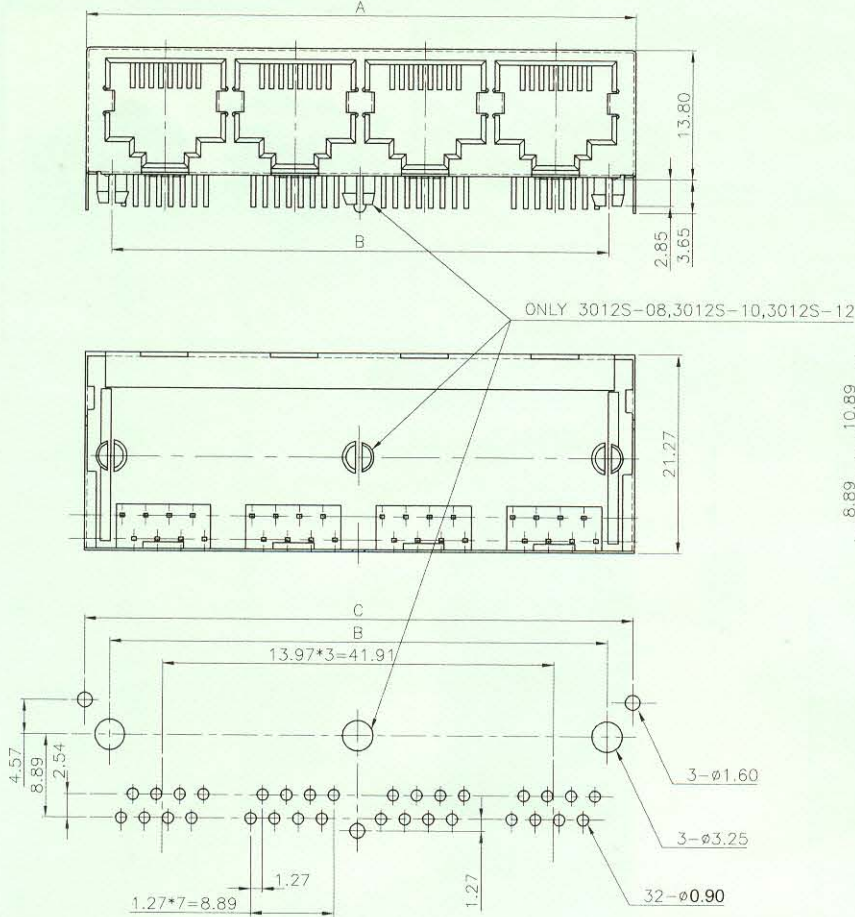


| PART NO. | No. of Ports | A      | B      | C      |
|----------|--------------|--------|--------|--------|
| 3012S-02 | 2            | 31.12  | 25.40  | 30.87  |
| 3012S-04 | 4            | 59.06  | 53.34  | 58.81  |
| 3012S-05 | 5            | 73.03  | 67.31  | 72.78  |
| 3012S-06 | 6            | 87.00  | 81.28  | 86.75  |
| 3012S-08 | 8            | 114.94 | 109.22 | 114.69 |
| 3012S-10 | 10           | 142.88 | 137.16 | 142.63 |
| 3012S-12 | 12           | 170.82 | 165.10 | 170.57 |

## Materials

- **Shielded** : Bronze With Nickel Plated
- **Housing** : Standard Material Glass Filled Polyester UL 94V-0  
Standard Colour Black
- **Contact** : 1) Square Pins, 0.35mm Thickness Phosphor Bronze Gold Plating Over Nickel in Contact Area.  
Tin Plating Over Nickel in Solder Area.  
2) Round Pins, 0.46mm Diameter C5102, Gold Plating Over Nickel.
- **Gold Plating** : Selective Gold Plating.

## Ordering Information

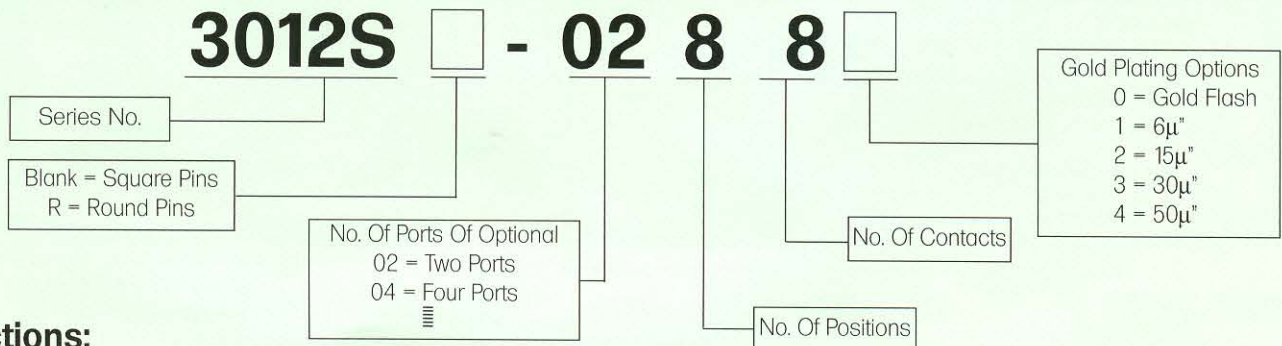

### Selections:

(1) W/Grounding Tabs On Top Or/and On Sides.

(2) Pin Spacing : 3.68 or 4.57mm Before Peg.

Please note 3.68mm is supplied as standard spacing option