

Features

- ◆ 2" x 1" metal package
- ◆ Wide 2:1 input voltage range
9–18, 18–36, 36–75 VDC
- ◆ High efficiency up to 92%
- ◆ Adjustable output voltage
- ◆ No minimum load required
- ◆ Operating temperature range
–40°C to +85°C
- ◆ Input filter to meet EN55022, class A
- ◆ Remote On/Off
- ◆ Under voltage lockout
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty



The TEN 60N series is a family of high performance 60 Watt dc/dc converter modules featuring wide 2:1 input voltage ranges in a six side shielded 2" x 1" metal package with industry standard footprint. Standard features include remote On/Off, over voltage protection, under voltage lockout and short circuit protection. High efficiency across load range and low input current characteristics at no load make these converters the ideal solution for battery-operated systems. Typical applications are in wireless networks, telecom/datacom, industry control systems and measurement equipment.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 60-1211N TEN 60-1212N TEN 60-1213N TEN 60-1215N TEN 60-1222N TEN 60-1223N TEN 60-1225N	9 – 18 VDC (12 VDC nominal)	5.0 VDC	12'000 mA	90.5 %
		12 VDC	5000 mA	90.5 %
		15 VDC	4000 mA	91.5 %
		24 VDC	2500 mA	91.5 %
		±12 VDC	±2500 mA	90 %
		±15 VDC	±2000 mA	90 %
		±24 VDC	±1250 mA	91 %
TEN 60-2411N TEN 60-2412N TEN 60-2413N TEN 60-2415N TEN 60-2422N TEN 60-2423N TEN 60-2425N	18 – 36 VDC (24 VDC nominal)	5.0 VDC	12'000 mA	92 %
		12 VDC	5000 mA	92 %
		15 VDC	4000 mA	92 %
		24 VDC	2500 mA	92 %
		±12 VDC	±2500 mA	90 %
		±15 VDC	±2000 mA	90 %
		±24 VDC	±1250 mA	91 %
TEN 60-4811N TEN 60-4812N TEN 60-4813N TEN 60-4815N TEN 60-4822N TEN 60-4823N TEN 60-4825N	36 – 75 VDC (48 VDC nominal)	5.0 VDC	12'000 mA	92 %
		12 VDC	5000 mA	92 %
		15 VDC	4000 mA	92 %
		24 VDC	2500 mA	92 %
		±12 VDC	±2500 mA	91 %
		±15 VDC	±2000 mA	91 %
		±24 VDC	±1250 mA	91 %

Input Specifications

Input current at no load		10 mA typ.
Start-up voltage	12 Vin models: 24 Vin models: 48 Vin models:	< 9.0 VDC < 18 VDC < 36 VDC
Under voltage shut down (lock-out circuit)	12 Vin models: 24 Vin models: 48 Vin models:	8.0 VDC typ. 16 VDC typ. 32 VDC typ.
Surge voltage (1 sec.)	12 Vin models: 24 Vin models: 48 Vin models:	25 V max. 50 V max. 100 V max.
Conducted noise		EN 55022 class A with external components filter proposal to be advised
ESD (electrostatic discharge)		EN 61000-4-2, air ± 8 kV, contact ± 6 kV, perf. criteria A
Radiated immunity		EN 61000-4-3, 20 V/m, perf. criteria A
Fast transient / surge (with external input capacitor)		EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 2 kV perf. criteria A
	– external input capacitor	12 & 24 Vin models: Nippon chemi-con KY 220 μ F, 100 V, ESR 48 mOhm and TVS 58V, 3000W peak (SMDJ58A) in parallel 48 Vin models: Nippon chemi-con KY 220 μ F, 100 V, ESR 48 mOhm and TVS 120V, 3000W peak (SMDJ120A) in parallel
Conducted immunity		EN 61000-4-6, 10 Vrms, perf. criteria A

Output Specifications

Voltage set accuracy		±1 %
Voltage adjustment range (single output models only)	15 & 24 VDC models: other models:	+20%, -10% ±10 %
Regulation	– Input variation V_{in} min. to V_{in} max. – Load variation 0 – 100 % – Load cross variation 25 % / 100 %	0.2 % max. single output models: 0.5 % max. dual output models: 1 % max. 5 % max.
Minimum load		not required
Temperature coefficient		±0.02 %/K
Ripple and noise (20 MHz bandwidth)	5.0 VDC: 12 & 15 VDC: 24 VDC:	100 mVp-p max. with 10µF/25V X7R MLCC 125 mVp-p max. with 10µF/25V X7R MLCC 200 mVp-p max. with 4.7µF/50V X7R MLCC
Start up time (constant resistive load)	– Power On – Remote On	60 ms typ. 60 ms typ.
Transient response (25% load step change)		250 µs typ.
Short circuit protection		continuous, automatic recovery
Over load protection		150 % of I _{out} max. typ. hiccup
Over-voltage protection (Zener diode, single output models only)	5 VDC models: 12 VDC models: 15 VDC models: 24 VDC models:	6.2 V 15 V 20 V 30 V
Capacitive load (max. values)	5.0 VDC models: 12 VDC models: 15 VDC models: 24 VDC models: ±12 VDC models: ±15 VDC models: ±24 VDC models:	30'000 µF 5850 µF 3900 µF 2000 µF 3900 µF (each output) 2400 µF (each output) 1000 µF (each output)


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


Temperature ranges	– Operating – Casing temperature – Storage	–40°C to +85°C (with derating) +105°C max. –55°C to +125°C
Power derating	– Natural convection – Natural convection with heat sink (optional)	2.5 %/K above +50°C 2.25 %/K above +55°C
Thermal impedance	– Natural convection – Natural convection with heat sink (optional)	10.8 K/W 10.3 K/W
Over-temperature protection		at 115°C
Humidity (non condensing)		5 – 95 % rel. H
Isolation voltage (60 sec.)	– Input / Output	1500 VDC
Isolation resistance	– Input / Output	>1 GOhm
Isolation capacitance	– Input / Output	2'200 pF max.
Switching frequency		250 kHz typ. (pulse width modulation PWM)
Thermal shock, mechanical shock & vibration	– Test conditions	MIL-STD-810F www.tracopower.com/products/mil810.pdf
Safety standards	– Certification documents	UL/cUL 60950-1, IEC/EN 60950-1 www.tracopower.com/overview/ten60n
Remote On/Off	– On: – Off: – Off idle current:	3.0 ... 12 VDC or open circuit 0 ... 1.2 VDC or short circuit pin 3 and pin 2 3.0 mA
Reliability, calculated MTBF (MIL-HDBK-217F, at +70°C, ground benign)		880'000 h
Environmental compliance	– Reach – RoHS	www.tracopower.com/products/reach-declaration.pdf RoHS directive 2011/65/EU

Output Voltage Adjustment (for single output models only)

Trim up



Trim down




Nominal output voltage at open Trim input
 Ru, Rd for adjustment to be advised

Application note: www.tracopower.com/products/ten60n-application.pdf

Physical Specifications

Casing material	copper
Baseplate material	non conductive FR4
Potting material	silicone (UL94V-0 rated)
Weight	33 g (1.16oz)
Soldering temperature	max. +265°C / 10 sec.

Outline Dimensions

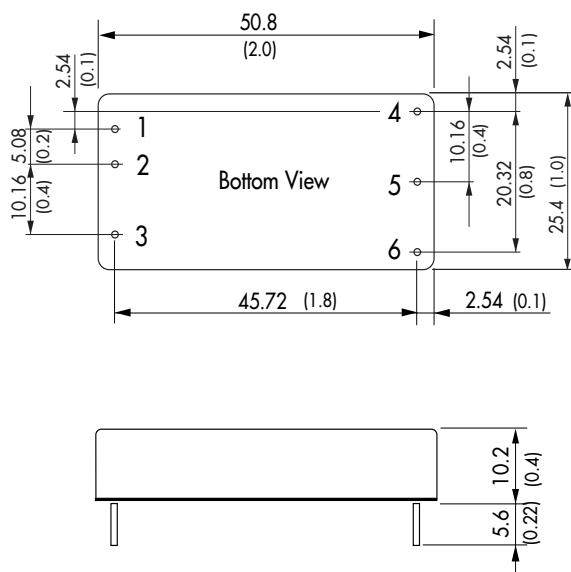




Pin-Out

Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	
4	+Vout	+Vout
5	-Vout	Common
6	TRIM	-Vout

Dimensions in [mm], () = Inch
Pin diameter: 1.0 ±0.1 (0.04 ±0.004)
Pin pitch tolerances: ±0.25 (±0.01)
Case tolerances: ±0.5 (±0.02)

Heat-Sink (Option)

Order code: TEN-HS1
(cont.: heat-sink, thermal pad, 2 clamps)
Material: Aluminum
Finish: Anodic treatment (black)
Weight: 17 g (0.60oz) without converter
Thermal impedance after assembling: 10.3 K/W

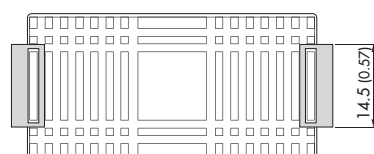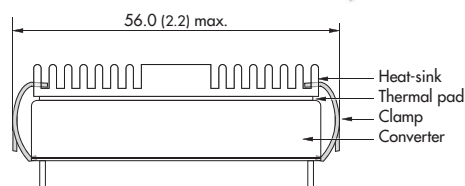

Note:

Before attaching the heatsink, the product label on converter has to be removed for optimal performance.

For volume orders we can supply the converters with heatsink already mounted. Please contact us for a relative quotation.

Dimensions in mm, () = Inch

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com