


- Compact SIP package
- Very high efficiency up to 97%
- Excellent line / load regulation
- Low standby current
- Operating temperature range -40 to 90°C
- Over-temperature protection
- Short circuit protection
- 3-year product warranty



TSR-0.5 is a series of step-down non-isolated switching regulators in compact SIP package. These converters are an ideal drop-in replacement to LM78 linear regulators when energy efficiency is a parameter of the design. The high efficiency up to 97% allows full load operation up to $+80^{\circ}\text{C}$ ($+90^{\circ}\text{C}$ with 50% load) ambient temperature without the need of forced air cooling. Excellent output voltage accuracy and low standby current are other features that distinguish switching regulators from linear regulators.

Models				
Order Code	Output Current max.	Input Voltage Range	Output Voltage nom.	Efficiency typ.
TSR 0.5-2415	500 mA	4.75 - 32 VDC (24 VDC nom.)	1.5 VDC	73 % (at V_{in} min.)
TSR 0.5-2418			1.8 VDC	82 % (at V_{in} min.)
TSR 0.5-2425			2.5 VDC	87 % (at V_{in} min.)
TSR 0.5-2433			3.3 VDC	91 % (at V_{in} min.)
TSR 0.5-2450			5 VDC	94 % (at V_{in} min.)
TSR 0.5-2465			6.5 VDC	95 % (at V_{in} min.)
TSR 0.5-2490			9 VDC	96 % (at V_{in} min.)
TSR 0.5-24120			12 VDC	97 % (at V_{in} min.)
TSR 0.5-24150			15 VDC	97 % (at V_{in} min.)

Note - For input voltage higher 28 VDC an input capacitor of 22 μF is required

Input Specifications

Input Current	- At no load	5 mA typ.
Surge Voltage		34 VDC max. (1 s max.)
Input Filter		Internal Capacitor
Short Circuit Input Power		1.5 W max.

Output Specifications

Voltage Set Accuracy		±3% max.
Regulation	- Input Variation (Vmin - Vmax)	0.2% max. (9, 12 & 15 Vout models) 0.4% max. (other models)
	- Load Variation (10 - 100%)	0.4% max. (9, 12 & 15 Vout models) 0.6% max. (other models)
Ripple and Noise (20 MHz Bandwidth)	1.5 Vout models:	30 mVp-p max.
	1.8 Vout models:	30 mVp-p max.
	2.5 Vout models:	30 mVp-p max.
	3.3 Vout models:	30 mVp-p max.
	5 Vout models:	30 mVp-p max.
	6.5 Vout models:	30 mVp-p max.
	9 Vout models:	40 mVp-p max.
	12 Vout models:	40 mVp-p max.
	15 Vout models:	40 mVp-p max.
Capacitive Load		220 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.015 %/K max.
Short Circuit Protection		Continuous, Automatic recovery
Transient Response	- Response Deviation	2 % max. (50% Load Step)
	- Response Time	100 µs max. (50% Load Step)

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class B (with external filter) FCC Part 15, class B
	- Radiated Emissions	EN 55032 class B (internal filter) FCC Part 15, class B
		External filter proposal: www.tracopower.com/overview/tsr0-5
EMS Immunity	- Electrostatic Discharge	Air: EN 61000-4-2, ±8 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 3 V/m, perf. criteria A
	- EFT (Burst)	EN 61000-4-4, ±0.5 kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: Nippon chemi-con KY 330 µF
	- PF Magnetic Field	Continuous: EN 61000-4-6, 3 Vrms, perf. criteria A
		Continuous: EN 61000-4-8, 3 A/m, perf. criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +90°C
	- Case Temperature	+100°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	5 %/K above 80°C
Over Temperature	- Protection Mode	160°C typ. (Automatic recovery)
Protection Switch Off	- Measurement Point	Internal IC temperature
Cooling System		Natural convection (20 LFM)
Switching Frequency		280 - 380 kHz (PWM)
		330 kHz typ. (PWM)
Insulation System		Non-isolated
Reliability	- Calculated MTBF	2'000'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Baking after washing: 100°C for 30 min

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.


Housing Material	Non-conductive Plastic (UL94 V-0 rated)
Pin Material	Nickel-Iron (Alloy 42)
Soldering Profile	Wave Soldering (1.5mm from casing) 260°C / 10 s max.
Connection Type	THD (Through-Hole Device)
Weight	1.95 g
Environmental Compliance	- Reach - RoHS
	www.tracopower.com/info/reach-declaration.pdf www.tracopower.com/info/rohs-declaration.pdf

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tsr0-5

Outline Dimensions

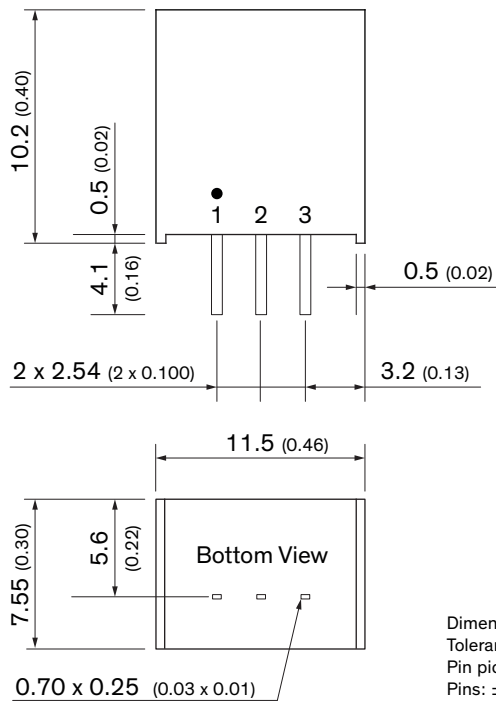

Pinout	
Pin	Function
1	+Vin
2	GND
3	+Vout