



# Construction PSA2000-LcomIn

## 1. Schematic



WIRE	TURNS
$\varnothing$ 1.6mm 14 AWG	13Ts

## 2. Configuration dimension

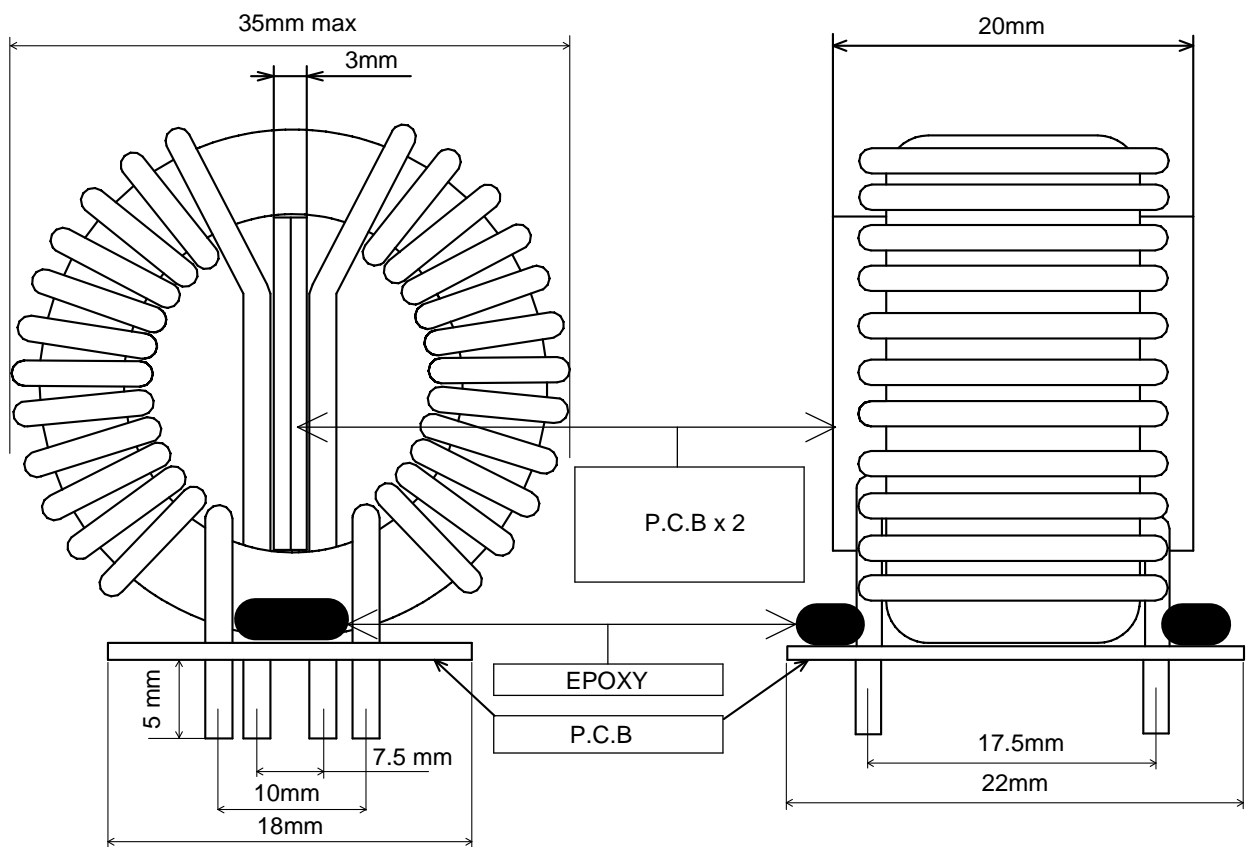

## 3. MATERIAL LIST

### 3.1. Core

R29 EPCOS B64290-L647-X38

### 3.2. WIRE

1PEW / 155 C

Pacific Electric Wire & Cable CO.,LTD  
UL NO. 84081

### 3.4. VARNISH

Varnish V-1630FS

Underwood industries of NEW YORK INC  
UL NO.E60614

### 3.5. EPOXY

9001A / 9000B

Shaw Huow Enterprise CO., LTD  
UL NO.105888

## 4. ELECTRICAL SPECIFICATION

INDUCTANCE 2.2mH.

D.C. RESISTENCE 6.5 mOm max.

Minimal guaranteed spacing between N1 and N2 wire 3mm.