

Fixed attenuators are placed in signal paths to reduce power transmission and are set at a fixed attenuation by symmetrical resistive networks that follows a T, L or Pi configuration. Their configuration can either be in waveguide, in surface mount or coaxial, and depending on their application, they can either be directional or bidirectional.

Connector material: brass gold plated

Product surface treatment: aluminum casing cleaning passivation

Nominal impedance: 50Ω

Temperature range: -55 ° C ~ +125 ° C

Connector: N male input and female output

Dimensions: 68\*70\*259mm

Weight: 1.9kg

#### Performance:


Average Power:250W

Frequency range: DC-3GHz

Attenuation:1-10dB ±0.5dB, 15-30dB ±1dB, 40dB ±1.2dB

VSWR:≤1.3

#### PHYSICAL DIMENSIONS:

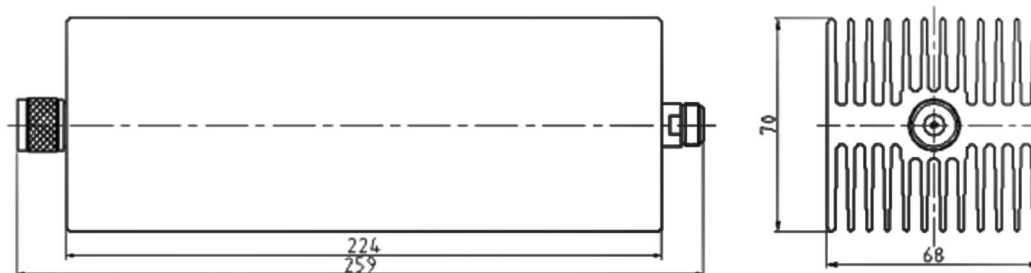

Unit:mm

Dimension tolerance:±2%