

Fixed attenuators are placed in signal paths to reduce power transmission and are set at a fixed attenuation by symmetrical resistive networks that follows a T, L or Pi configuration. Their configuration can either be in waveguide, in surface mount or coaxial, and depending on their application, they can either be directional or bidirectional.

Connector material: brass gold plated

Product surface treatment: aluminum casing cleaning passivation

Nominal impedance: 50Ω

Temperature range: -55 ° C ~ +125 ° C

Connector: N (J-K) male input and female output

Dimensions: 267×98×60mm

Weight: 2.8kg

Performance:


Average Power Rating: 250W

Frequency range : DC-3GHz

Attenuation:1-9,10,20,30,40,50dB Available and 1-10dB ±0.8dB,10-30dB ±1dB, 40-50dB ±1.5dB

VSWR:≤1.25

PHYSICAL DIMENSIONS:

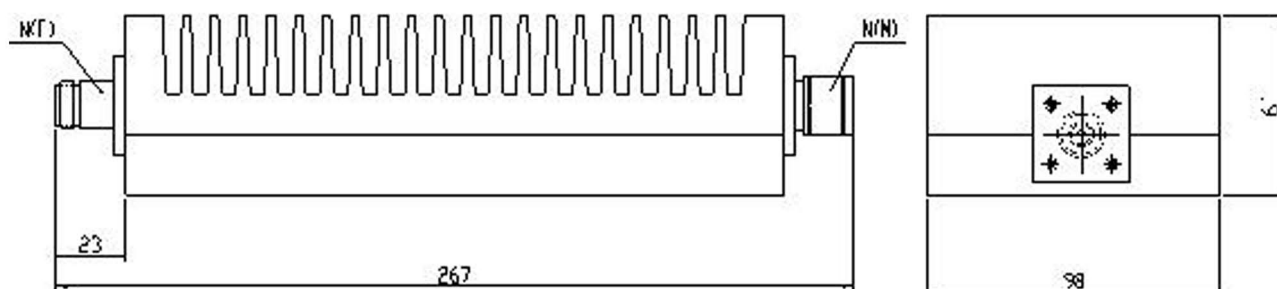

Unit:mm

Dimension tolerance:±2%