


# Graphic 128x128 dots **WG128128B**

## Dimension drawing

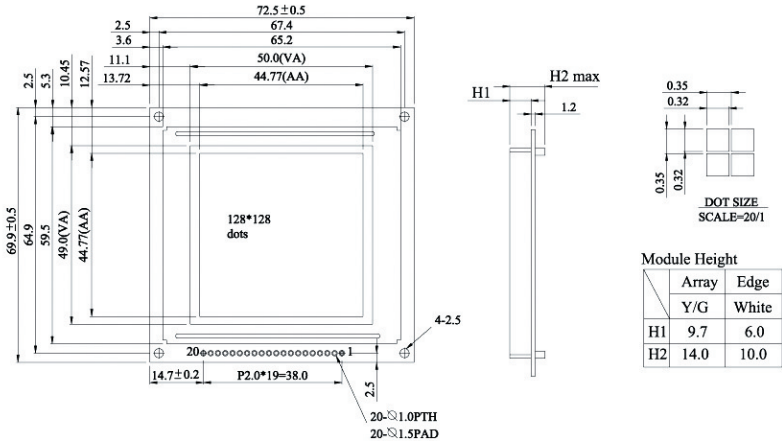

### Feature

1. Built-in controller SANYO(LC7981)
2. 1/128 duty cycle
3. +5V power supply

Pin NO	Symbol	Function
1	DB0	Data bus line
2	DB1	Data bus line
3	DB2	Data bus line
4	DB3	Data bus line
5	DB4	Data bus line
6	DB5	Data bus line
7	DB6	Data bus line
8	DB7	Data bus line
9	RS	Data /Instruction select
10	R/W	Data read /write
11	E	Enable singnal
12	CS	Chip select
13	RES	Reset signal
14	Vo	Contrast Ad ustment
15	VDD	Power supply (+5v)
16	VSS	Power supply (GND)
17	Vee	Negative voltage output
18	dispoft	No connection
19	LED(+)	Power supply for LED B/L(+4.2V)
20	LED(-)	Power supply for LED B/L(0V)

### Mechanical Data

Item	Standard Value	Unit
Module Dimension	72.5x69.9	mm
Viewing Area	50.0x49.0	mm
Dot Size	0.32x0.32	mm
Dot Pitch	0.35x0.35	mm

### Absolute Maximum Rating

Item	Symbol	Standard Value			Unit
		min.	typ.	max.	
Power Supply	VDD-VSS	4.75	5.0	5.25	V
Input Voltage	VI	-0.3	---	VDD	V

Note : VSS=0 Volt, VDD=5.0 Volt.

### Electronical Characteristics

Item	Symbol	Condition	Standard Value			Unit
			min.	typ.	max.	
Input Voltage	VDD	L level	0.7V <sub>DD</sub>	---	V <sub>DD</sub>	V
	VIO	H level	---	---	0.3V <sub>DD</sub>	V
Supply Current	IDD	VDD=5V	---	1.5	---	mA
Recommended LC Driving Voltage for Normal Temp. Version module	VDD-V0	-20°C	---	18.0	---	V
		0°C	---	17.5	---	V
		25°C	---	17.0	---	V
		50°C	---	16.0	---	V
LED Forward Voltage	VF	25°C	---	4.2	4.6	V
LED Forward Current	IF	25°C	---	---	---	mA
EL Power Supply Current	IEL	Vel=110VAC,400Hz	---	---	5.0	mA

Graphic type