


SPECIFICATION FOR APPROVAL

REF : 20111014-D


PAGE: 1

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SR0603□□□□L□-□□□
---------------	--------------------	---------------------------------	------------------

I . CONFIGURATION & DIMENSIONS :

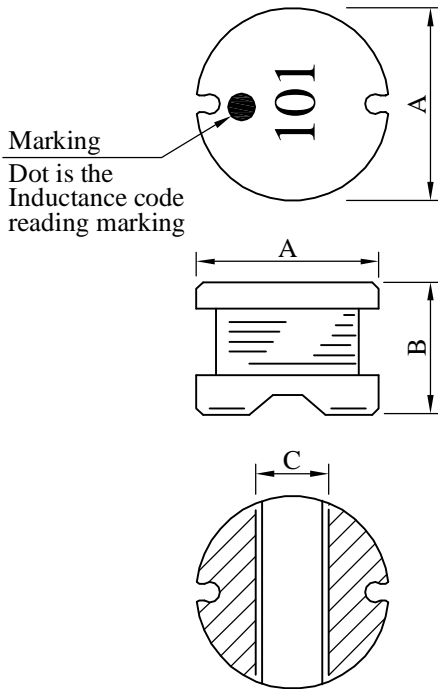

- A : 5.6±0.2 m/m
- B : 3.7±0.3 m/m
- C : 2.3 ref. m/m
- D : 5.8 ref. m/m
- E : 6.0 ref. m/m
- F : 1.7 ref. m/m




II . SCHEMATIC DIAGRAM :



III . MATERIALS :


- a . Core : Ferrite DR core
- b . Wire : Enamelled copper wire (class H)
- c . Terminal : Ag/Ni/Sn
- d . Remark : Products comply with RoHS' requirements

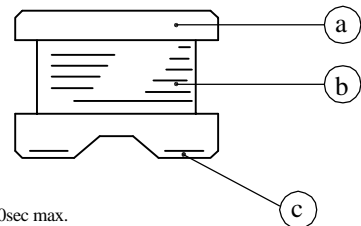

Peak Temp : 250°C max.
 Max. Peak Temp - 5°C : 30sec max.
 Max time above 217°C : 60sec~150sec max.

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 40°C max.
- b . Rated current : Base on temp. rise
& $\Delta L / L_{0A} = 10\%$ max.
- c . Storage temp. : -40°C ----+125°C
- d . Operating temp. : -40°C ----+105°C
- e . Resistance to solder heat : 250°C.10 secs.

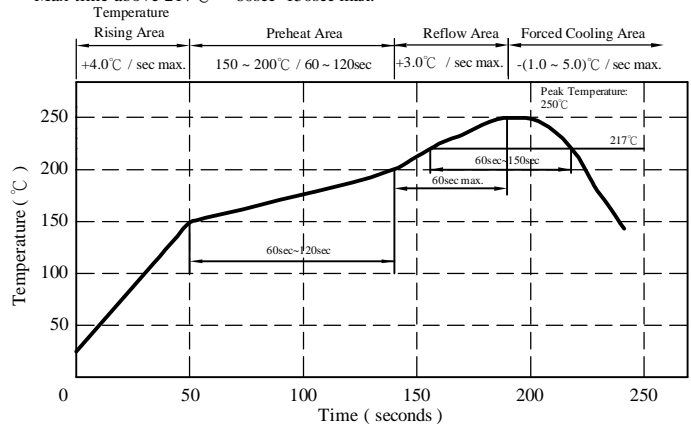

AR-001A

SPECIFICATION FOR APPROVAL

REF : 20111014-D

PAGE: 2

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0603□□□□L□-□□□
		ABC'S ITEM NO.	

V . ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		SRF (MHz) nom.	RDC (Ω) max.	IDC (A) max.
			L	Q			
SR06031R5ML□-□□□	1.5±20%	24	1K	7.960M	85.0	0.040	3.00
SR06032R5ML□-□□□	2.5±20%	21	1K	7.960M	74.0	0.045	2.35
SR06033R3ML□-□□□	3.3±20%	21	1K	7.960M	68.0	0.048	2.20
SR06033R9ML□-□□□	3.9±20%	22	1K	7.960M	62.0	0.050	2.10
SR06034R7ML□-□□□	4.7±20%	20	1K	7.960M	56.0	0.066	1.80
SR06035R0ML□-□□□	5.0±20%	19	1K	7.960M	50.0	0.070	1.60
SR06036R8ML□-□□□	6.8±20%	19	1K	7.960M	44.0	0.110	1.38
SR06037R5ML□-□□□	7.5±20%	19	1K	7.960M	38.0	0.120	1.29
SR0603100ML□-□□□	10.0±20%	24	1K	2.520M	34.0	0.150	1.14
SR0603120ML□-□□□	12.0±20%	23	1K	2.520M	30.0	0.160	1.02
SR0603150ML□-□□□	15.0±20%	22	1K	2.520M	28.0	0.180	0.93
SR0603180ML□-□□□	18.0±20%	23	1K	2.520M	24.0	0.250	0.82
SR0603220ML□-□□□	22.0±20%	20	1K	2.520M	20.0	0.275	0.75
SR0603270ML□-□□□	27.0±20%	19	1K	2.520M	19.0	0.300	0.67
SR0603330KL□-□□□	33.0±10%	23	1K	2.520M	15.0	0.450	0.61
SR0603390KL□-□□□	39.0±10%	22	1K	2.520M	13.0	0.460	0.56
SR0603470KL□-□□□	47.0±10%	20	1K	2.520M	13.0	0.550	0.52
SR0603560KL□-□□□	56.0±10%	17	1K	2.520M	12.0	0.615	0.48
SR0603680KL□-□□□	68.0±10%	17	1K	2.520M	12.0	0.720	0.44
SR0603820KL□-□□□	82.0±10%	15	1K	2.520M	11.0	0.840	0.40
SR0603101KL□-□□□	100.0±10%	28	1K	796K	9.6	0.950	0.38
SR0603121KL□-□□□	120.0±10%	27	1K	796K	8.1	1.100	0.36
SR0603151KL□-□□□	150.0±10%	28	1K	796K	7.5	1.430	0.32
SR0603181KL□-□□□	180.0±10%	26	1K	796K	6.9	1.600	0.30
SR0603221KL□-□□□	220.0±10%	26	1K	796K	5.5	2.000	0.26
SR0603271KL□-□□□	270.0±10%	26	1K	796K	4.9	2.400	0.24
SR0603331KL□-□□□	330.0±10%	28	1K	796K	4.7	3.200	0.20
SR0603391KL□-□□□	390.0±10%	28	1K	796K	4.1	3.400	0.18
SR0603471KL□-□□□	470.0±10%	29	1K	796K	3.5	4.550	0.15

- 1). □ : Packaging information... Bulk Taping Reel
 2). "- □□□": Reference code
 3). IDC base on temp. rise 40°C max. & Δ L/L0A=10% max.

AR-001A




SPECIFICATION FOR APPROVAL

REF : 20111014-D

PAGE: 3

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SR0603□□□□L□-□□□
---------------	--------------------	---------------------------------	------------------

VI . INDUCTANCE VS. DC CURRENT CURVE :

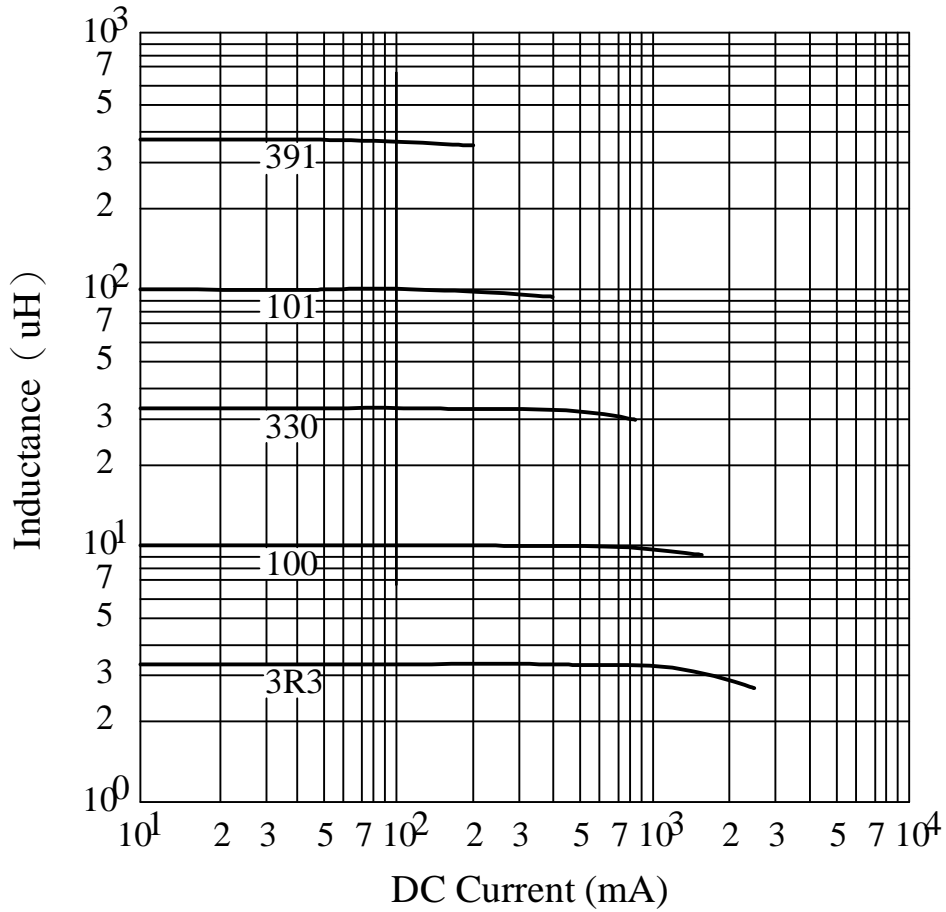

AR-001A

SPECIFICATION FOR APPROVAL


REF : 20111014-D

PAGE: 4


PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SR0603□□□□L□-□□□
---------------	--------------------	---------------------------------	------------------

VII . PACKAGING INFORMATION :

(1) Configuration

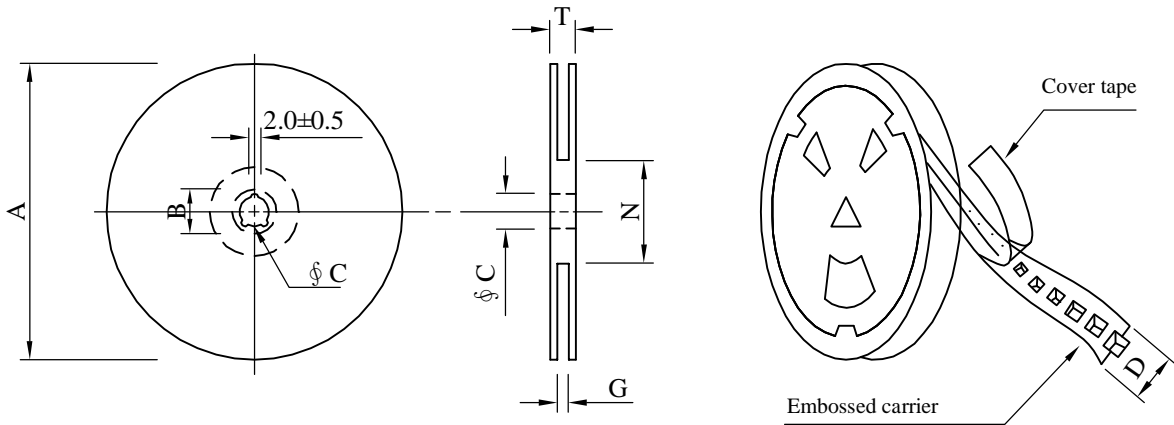

※Carrier tape width : D

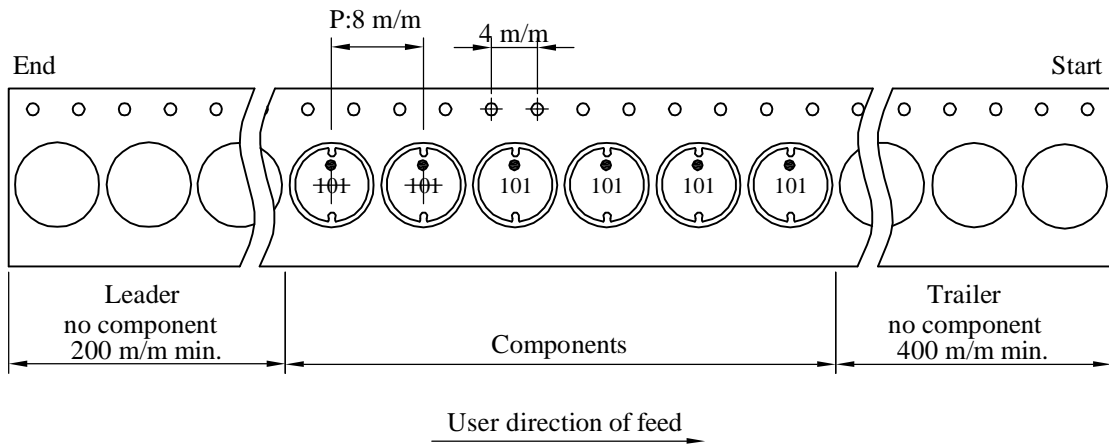

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
07 - 12	178	21±0.8	13	12	14 ⁺⁰	50 ⁻⁰	16.5
13 - 12	330	21±0.8	13±0.5	12	14 ⁺⁰	50 ⁻⁰	18.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SR0603	400	260	07 - 12	16,000	8.5	42 x 41 x 24
SR0603	1500	650	13 - 12	12,000	8.0	38 x 37 x 22

AR-001A


SPECIFICATION FOR APPROVAL

REF : 20111014-D

PAGE: 5

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0603□□□□L□-□□□
		ABC'S ITEM NO.	

VIII . DWGING NUMBER EXPRESSION :

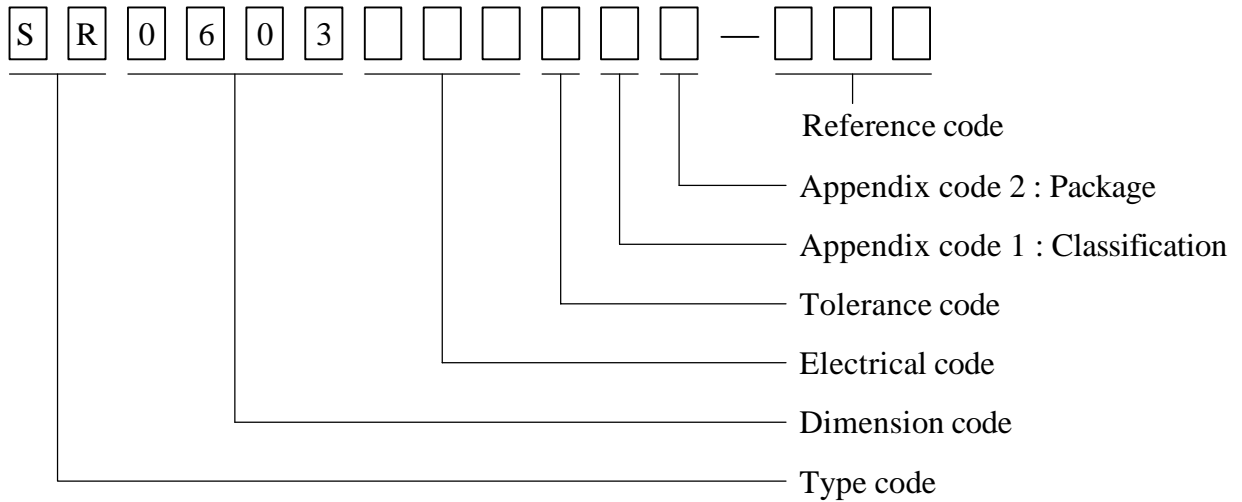


Appendix code 1 : Product Classification

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	Bag	400 pcs	
B	T / R (Reel package)	400 pcs	
C	T / R (Reel package)	1500 pcs	

AR-001A



SPECIFICATION FOR APPROVAL

REF : 20111014-D

PAGE: 6

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0603□□□□L□-□□□
		ABC'S ITEM NO.	

IX . RELIABILITY TEST :

Test item	Specification	Test condition						
Solderability	More than 95% of the terminal electrode shall be covered With fresh solder.	Preheat : 155°C / 4 hours. Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5°C Flux : Rosin Dip time : 5±0.5 seconds						
Thermal shock test (Temp. cycle)	Electrical oharacteristics shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">-40 °C 30 minutes</td> </tr> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">+105 °C 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-40 °C 30 minutes	Room temp. 15 minutes	→	+105 °C 30 minutes
Room temp. 15 minutes		→	-40 °C 30 minutes					
Room temp. 15 minutes		→	+105 °C 30 minutes					
Humidity test		<p>Temperature : 40±2°C Humidity : 90±5% Time : 1000 hours</p>						
High temp. Resistance test	<p>Temperature : 105±5°C Applied current : Per spec. Time : 96 hours</p>							

AR-001A



SPECIFICATION FOR APPROVAL

REF : 20111014-D

PAGE: 7

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SR0603□□□□L□-□□□
		ABC'S ITEM NO.	

X . UL CARD :

OBMW2 October 06, 2005

Magnet Wire-Component

ELEKTRISOLA (MALAYSLA) SDN BHD E143312

JALAN DAMAI SATU JANDA BAIK 28750 BENTONG, PAHANG
DARUL MAKMUR MALAYSIA

Mtl Dsg	Mark Dsg	Coating Type		ANSI Typ	Temp Class
		BC	OC		
Estersol 180	E180	Polyesterimide (solderable)	—	MW-77	180
Amldester 200	A200	Polyesterimide	—	MW-74	200
Polysol-N 155	PN155	Polyurechane	Nylon	MW-80, MW-28	155, 130
Polysol 155	P155, G155	Polyurechane	—	MW-79, MW-75	155, 130
Polysol 155g	Pg155	Polyurechane	—	MW-75	130
Polysol 155p	Pp155,Gp155	Polyurechane	—	MW-79	155
Polysol 160	P160	Polyurechane	—	MW-79	155
Polysol 180	P180,G180	Polyurechane	—	MW-82	180
Polysol 170	P170 or G170	Polyurechane	—	MW-79	155
Polysol-N 180	PN180	Polyurechane	Nylon	MW-83	180
Polysol P155p	P155p	Polyurechane	—	MW-79	155

Marking : Company name, material designation or marked designation and factory identification on package ok reel

See General Information preceding These Recognitions

For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

AR-001A

