
Precision Optical Performance AlInGaP II LED Lamps

Technical Data

HLMP-ELxx
HLMP-EHxx
HLMP-EDxx

Features

- **Well Defined Spatial Radiation Patterns**
- **Viewing Angles:** 15°, 23°, 30°
- **High Luminous Output**
- **Colors:**
 - 592 nm Amber
 - 617 nm Reddish-Orange
 - 630 nm Red
- **High Operating Temperature:**
 $T_{JLED} = +130^{\circ}\text{C}$
- **Superior Resistance to Moisture**

Benefits

- **Viewing Angles Match Traffic Management Requirements**
- **Colors Meet Automotive and Traffic Signal Specifications**
- **Superior Light Output Performance in Outdoor Environments**
- **Suitable for Autoinsertion into PC Boards**


Applications

- **Traffic Management:**
 - Traffic Signals
 - Work Zone Warning Lights
 - Variable Message Signs
- **Commercial Outdoor Advertising:**
 - Signs
 - Marquees
- **Automotive:**
 - Exterior and Interior Lights

Description

Precision Optical Performance AlInGaP II (aluminum indium gallium phosphide) LEDs offer superior light output for excellent readability in sunlight and dependable performance. The AlInGaP II technology provides extremely stable light output over long periods of time.

These LED lamps are untinted, nondiffused, T-1^{3/4} packages incorporating second generation optics which produce well defined radiation patterns at specific viewing cone angles.

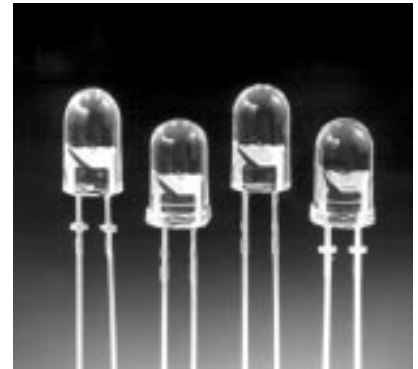

These lamps are made with an advanced optical grade epoxy offering superior high temperature and high moisture resistance performance in outdoor signal and sign applications. The maximum LED junction temperature limit of +130°C enables high temperature operation in bright sunlight conditions. The epoxy contains both uv-a and uv-b inhibitors to reduce the effects of long term exposure to direct sunlight.

T-1³/₄ (5 mm) Precision Optical Performance AlInGaP II LED Lamps Selection Guide

Typical Viewing Angle 2θ _{1/2} (Deg.) ^[2]	Color and Dominant Wavelength (nm), Typ. ^[1]	Lamps Without Standoffs (Outline Drawing A)	Lamps With Standoffs (Outline Drawing B)	Luminous Intensity I _v (mcd) ^[3,4] @ I(f) = 20 mA		
				Min.	Max.	
15°	Amber 592	HLMP-EL16-TW000	HLMP-EL18-TW000	2170	8300	
		HLMP-EL16-TWR00	HLMP-EL18-TWR00	2170	8300	
		HLMP-EL16-TWK00*		2170	8300	
		HLMP-EL16-TWS00		2170	8300	
		HLMP-EL16-TUS00		2170	4800	
		HLMP-EL16-TV400**		2170	6300	
		HLMP-EL16-TVU00		2170	6300	
		HLMP-EL16-UX000	HLMP-EL18-UX000	2750	10700	
		HLMP-EL16-UXR00	HLMP-EL18-UXR00	2750	10700	
		HLMP-EL16-VW000		3600	8300	
		HLMP-EL16-VWR000		3600	8300	
		HLMP-EL16-VWK00*		3600	8300	
		HLMP-EL16-VWS00		3600	8300	
		HLMP-EL16-VX000		3600	10700	
		HLMP-EL16-VXR00		3600	10700	
		HLMP-EL16-VX400**		3600	10700	
		HLMP-EL16-VXK00*		3600	10700	
		HLMP-EL16-VXS00		3600	10700	
		HLMP-EL16-VY000	HLMP-EL18-VY000	3600	13800	
		HLMP-EL16-VYR00	HLMP-EL18-VYR00	3600	13800	
	HLMP-EL16-VYK00*		3600	13800		
	HLMP-EL16-VYS00		3600	13800		
	Red-Orange 615			HLMP-EH18-TW000	2170	8300
			HLMP-EH16-UX000	HLMP-EH18-UX000	2750	10700
	Red 630		HLMP-ED16-TW000	HLMP-ED18-TW000	2170	8300
			HLMP-ED16-TWT00	HLMP-ED18-TWT00	2170	8300
			HLMP-ED16-UX000	HLMP-ED18-UX000	2750	10700
			HLMP-ED16-UXT00	HLMP-ED18-UXT00	2750	10700

T-1³/₄ (5 mm) Precision Optical Performance AlInGaP II Led Lamps (Continued) Selection Guide

Typical Viewing Angle $2\theta_{1/2}$ (Deg.) ^[2]	Color and Dominant Wavelength (nm), Typ. ^[1]	Lamps Without Standoffs (Outline Drawing A)	Lamps With Standoffs (Outline Drawing B)	Luminous Intensity I_v (mcd) ^[3,4] @ $I(f) = 20$ mA	
				Min.	Max
23°	Amber 592	HLMP-EL25-QS400**		1000	2900
		HLMP-EL25-QSU00		1000	2900
		HLMP-EL25-QSK00*		1000	2900
		HLMP-EL25-QSS00		1000	2900
		HLMP-EL25-QT000		1000	3700
		HLMP-EL25-QTR00	HLMP-EL27-QTR00	1000	3700
		HLMP-EL25-RU000	HLMP-EL27-RU000	1300	4800
		HLMP-EL25-RUR00	HLMP-EL27-RUR00	1300	4800
		HLMP-EL25-RUK00*		1300	4800
		HLMP-EL25-RUS00		1300	4800
		HLMP-EL25-ST000		1650	3700
		HLMP-EL25-STR00		1650	3700
		HLMP-EL25-STK00*		1650	3700
		HLMP-EL25-STS00		1650	3700
		HLMP-EL25-SU000		1650	4800
		HLMP-EL25-SUR00		1650	4800
		HLMP-EL25-SU400**		1650	4800
		HLMP-EL25-SUU00		1650	4800
		HLMP-EL25-SUK00*		1650	4800
		HLMP-EL25-SUS00		1650	4800
		HLMP-EL25-SVK00*		1650	6300
		HLMP-EL25-SVS00		1650	6300
		HLMP-EL25-SV000	HLMP-EL27-SV000	1650	6300
		HLMP-EL25-SVR00	HLMP-EL27-SVR00	1650	6300
		HLMP-EL25-TW000	HLMP-EL27-TW000	2170	8300
		HLMP-EL25-TWR00	HLMP-EL27-TWR00	2170	8300
HLMP-EL25-TWK00*		2170	8300		
HLMP-EL25-TWS00		2170	8300		

Notes:

1. Dominant Wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.
2. $\theta_{1/2}$ is the off-axis angle where the luminous intensity is one half the on-axis intensity.
3. The luminous intensity is measured on the mechanical axis of the lamp package.
4. The optical axis is closely aligned with the package mechanical axis.

Part numbers in **bold** are recommended for new designs.

*HLMP-xLxx-xxK00 are selected to amber color bins 2 and 4 only.

**HLMP-xLxx-xx400 are selected to amber color bin 4 only.

T-1³/₄ (5 mm) Precision Optical Performance AlInGaP II Led Lamps (Continued) Selection Guide

Typical Viewing Angle $2\theta_{1/2}$ (Deg.) ^[2]	Color and Dominant Wavelength (nm), Typ. ^[1]	Lamps Without Standoffs (Outline Drawing A)	Lamps With Standoffs (Outline Drawing B)	Luminous Intensity I_v (mcd) ^[3,4] @ $I(f) = 20$ mA		
				Min.	Max	
23°	Red-Orange 615	HLMP-EH25-QT000		1000	3700	
		HLMP-EH25-RU000		1300	4800	
			HLMP-EH27-SV000	1650	6300	
		HLMP-EH25-TW000	HLMP-EH27-TW000	2170	8300	
	Red 630	HLMP-ED25-QT000		1000	3700	
		HLMP-ED25-QTT00		1000	3700	
		HLMP-ED25-RU000	HLMP-ED27-RU000	1300	4800	
		HLMP-ED25-RUT00	HLMP-ED27-RUT00	1300	4800	
		HLMP-ED25-SV000	HLMP-ED27-SV000	1650	6300	
		HLMP-ED25-SVT00	HLMP-ED27-SVT00	1650	6300	
		HLMP-ED25-TW000	HLMP-ED27-TW000	2170	8300	
		HLMP-ED25-TWT00	HLMP-ED27-TWT00	2170	8300	
	30°	Amber 592	HLMP-EL31-QRS00		1000	2200
			HLMP-EL31-QS000		1000	2900
HLMP-EL31-QSR00				1000	2900	
HLMP-EL31-QS400**				1000	2900	
HLMP-EL31-QSU00				1000	2900	
HLMP-EL31-QT000			HLMP-EL33-QT000	1000	3700	
HLMP-EL31-QTR00			HLMP-EL33-QTR00	1000	3700	
HLMP-EL31-QTK00*				1000	3700	
HLMP-EL31-QTS00				1000	3700	
HLMP-EL31-SV000			HLMP-EL33-SV000	1650	6300	
HLMP-EL31-SVR00			HLMP-EL33-SVR00	1650	6300	
HLMP-EL31-ST000				1650	3700	
HLMP-EL31-STR00				1650	3700	
HLMP-EL31-STK00*				1650	3700	
HLMP-EL31-STS00				1650	3700	
HLMP-EL31-SUK00*				1650	4800	

Notes:

1. Dominant Wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.
2. $\theta_{1/2}$ is the off-axis angle where the luminous intensity is one half the on-axis intensity.
3. The luminous intensity is measured on the mechanical axis of the lamp package.
4. The optical axis is closely aligned with the package mechanical axis.

Part numbers in **bold** are recommended for new designs.

*HLMP-xLxx-xxK00 are selected to amber color bins 2 and 4 only.

**HLMP-xLxx-xx400 are selected to amber color bin 4 only.

T-1³/₄ (5 mm) Precision Optical Performance AlInGaP II Led Lamps (Continued) Selection Guide

Typical Viewing Angle $2\theta_{1/2}$ (Deg.) ^[2]	Color and Dominant Wavelength (nm), Typ. ^[1]	Lamps Without Standoffs (Outline Drawing A)	Lamps With Standoffs (Outline Drawing B)	Luminous Intensity I_v (mcd) ^[3,4] @ $I(f) = 20$ mA		
				Min.	Max.	
30°	Amber 592	HLMP-EL31-SUS00		1650	4800	
		HLMP-EL31-SU400**		1650	4800	
		HLMP-EL31-SUU00		1650	4800	
		HLMP-EL31-SU000		1650	4800	
		HLMP-EL31-SUR00		1650	4800	
		HLMP-EL31-SVK00*		1650	6300	
		HLMP-EL31-SVS00		1650	6300	
	Red-Orange 615	HLMP-EH31-PS000			765	2900
		HLMP-EH31-QT000	HLMP-EH33-QT000		1000	3700
		HLMP-EH31-RU000	HLMP-EH33-RU000		1300	4800
		HLMP-EH31-SV000	HLMP-EH33-SV000		1650	6300
		HLMP-EH31-SU000			1650	4800
	Red 630			HLMP-ED33-QT000	1000	3700
		HLMP-ED31-QTT00	HLMP-ED33-QTT00		1000	3700
		HLMP-ED31-ST000			1650	3700
		HLMP-ED31-STT00			1650	3700
		HLMP-ED31-SU000			1650	4800
		HLMP-ED31-SUT00			1650	4800
		HLMP-ED31-RU000	HLMP-ED33-RU000		1300	4800
		HLMP-ED31-RUT00	HLMP-ED33-RUT00		1300	4800
		HLMP-ED31-SV000	HLMP-ED33-SV000		1650	6300
HLMP-ED31-SVT00		HLMP-ED33-SVT00		1650	6300	

Notes:

1. Dominant Wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.
2. $\theta_{1/2}$ is the off-axis angle where the luminous intensity is one half the on-axis intensity.
3. The luminous intensity is measured on the mechanical axis of the lamp package.
4. The optical axis is closely aligned with the package mechanical axis.


Part numbers in **bold** are recommended for new designs.

*HLMP-xLxx-xxK00 are selected to amber color bins 2 and 4 only.

**HLMP-xLxx-xx400 are selected to amber color bin 4 only.

Part Numbering System



HLMP- x x xx - x x x xx

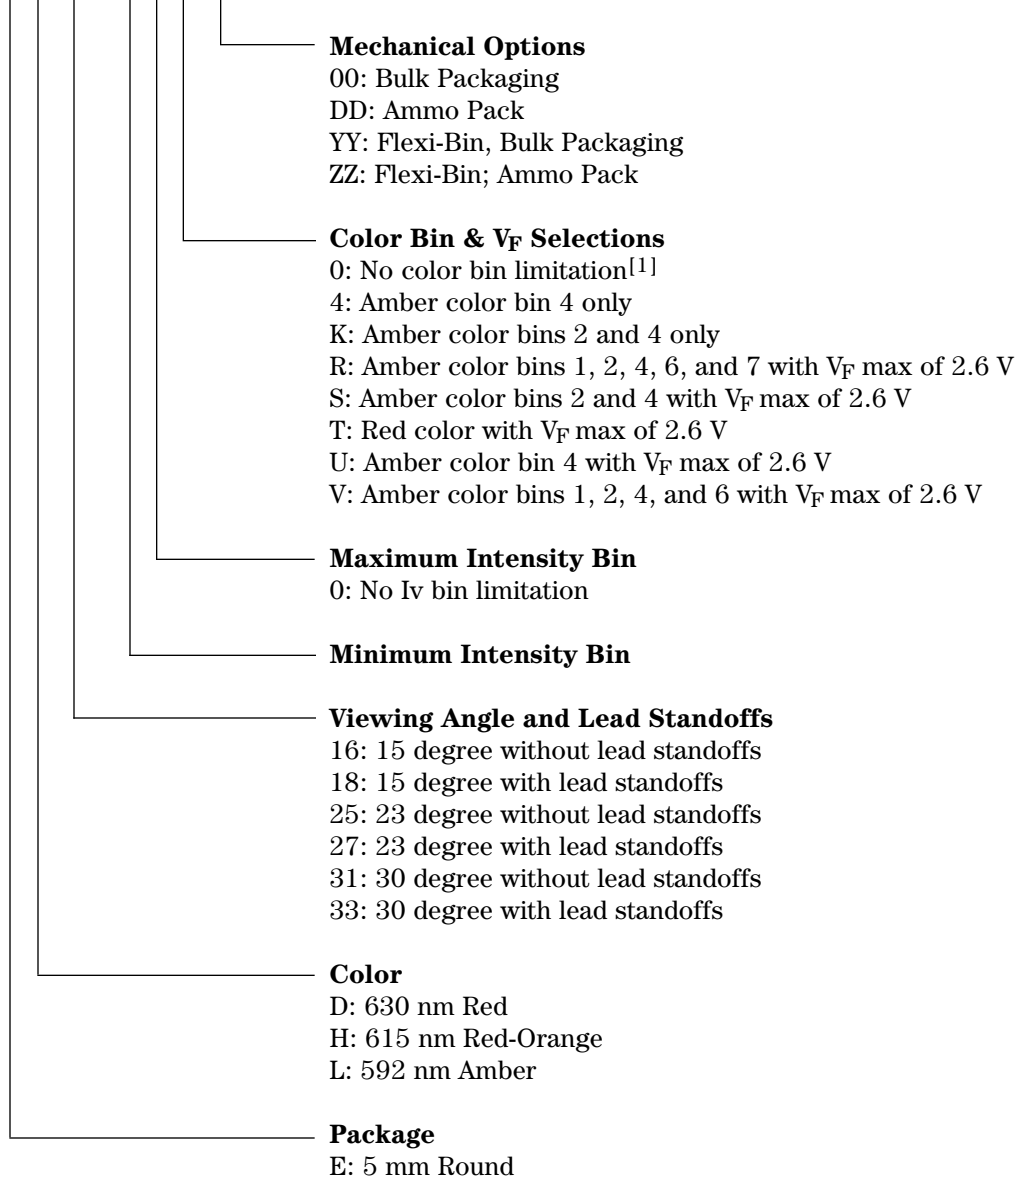

Note:

1. For amber color, "0" includes color bins 1, 2, 4, and 6 only.

Package Dimensions

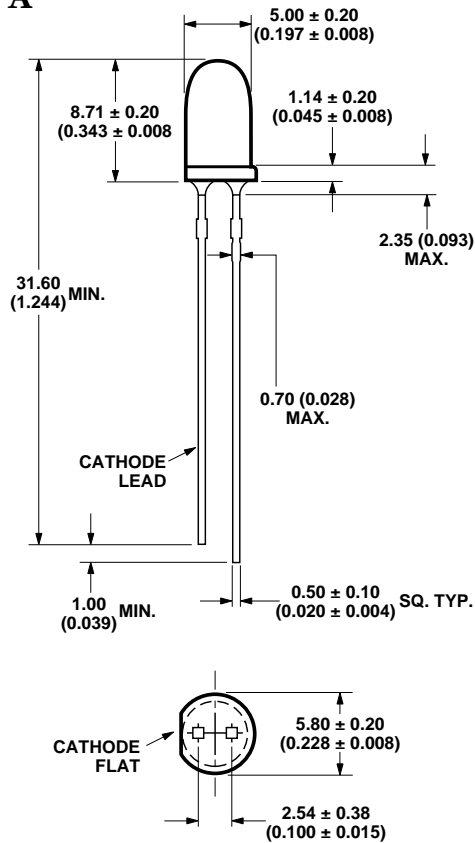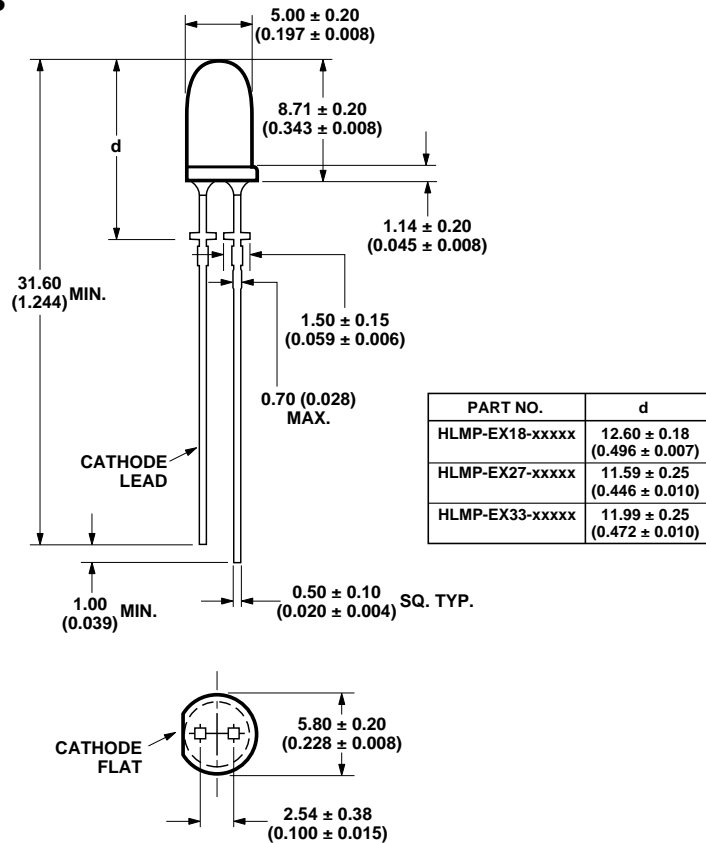A

B


Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

DC Forward Current ^[1,2,3]	50 mA
Peak Pulsed Forward Current ^[2,3]	100 mA
Average Forward Current	30 mA
Reverse Voltage ($I_R = 100 \mu\text{A}$)	5 V
LED Junction Temperature	130°C
Operating Temperature	-40°C to +100°C
Storage Temperature	-40°C to +120°C
Dip/Drag Solder Temperature	260°C for 6 seconds
Through-the-Wave Preheat Temperature	145°C
Through-the-Wave Solder Temperature	245°C for 3 seconds
	[1.59 mm (0.060 in.) below seating plane]

Notes:

- Derate linearly as shown in Figure 4.
- For long term performance with minimal light output degradation, drive currents between 10 mA and 30 mA are recommended. For more information on recommended drive conditions, please refer to Application Brief I-024 (5966-3087E).
- Please contact your sales representative about operating currents below 10 mA.

Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Forward Voltage Amber ($\lambda_d = 592 \text{ nm}$) Red-Orange ($\lambda_d = 617 \text{ nm}$) Red ($\lambda_d = 630 \text{ nm}$)	V_F		2.15 2.08 2.00	2.4 ^[1]	V	$I_F = 20 \text{ mA}$
Reverse Voltage	V_R	5	20		V	$I_R = 100 \mu\text{A}$
Peak Wavelength Amber Red-Orange Red	λ_{PEAK}		594 623 639		nm	Peak of Wavelength of Spectral Distribution at $I_F = 20 \text{ mA}$
Spectral Halfwidth	$\Delta\lambda_{1/2}$		17		nm	Wavelength Width at Spectral Distribution $1/2$ Power Point at $I_F = 20 \text{ mA}$
Speed of Response	τ_s		20		ns	Exponential Time Constant, e^{-t/τ_s}
Capacitance	C		40		pF	$V_F = 0, f = 1 \text{ MHz}$
Thermal Resistance	$R_{\Theta\text{J-PIN}}$		240		$^\circ\text{C/W}$	LED Junction-to-Cathode Lead
Luminous Efficacy ^[2] Amber Red-Orange Red	η_v		500 235 155		lm/W	Emitted Luminous Power/Emitted Radiant Power at $I_F = 20 \text{ mA}$

Note:

- For options -xxRxx, -xxSxx, -xxTxx, -xxUxx, and -xxVxx, max forward voltage (Vf) is 2.6 V.
- The radiant intensity, I_e , in watts per steradian, may be found from the equation $I_e = I_v/\eta_v$, where I_v is the luminous intensity in candelas and η_v is the luminous efficacy in lumens/watt.

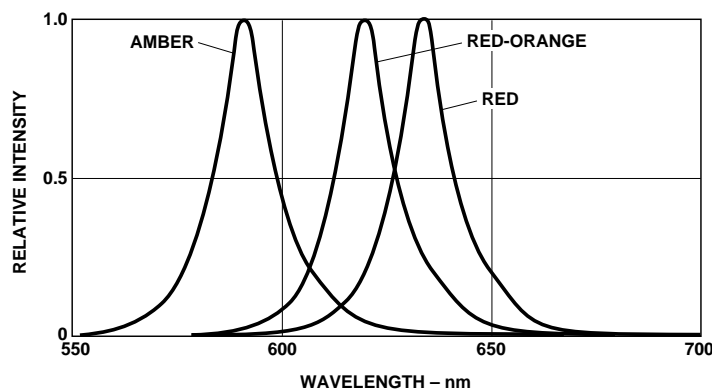


Figure 1. Relative Intensity vs. Peak Wavelength.

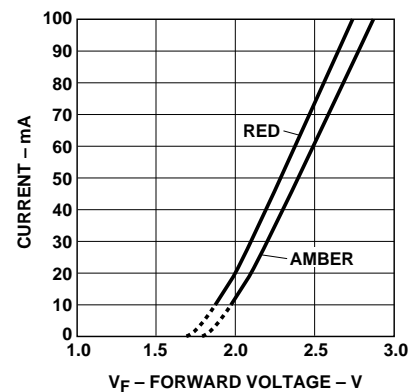


Figure 2. Forward Current vs. Forward Voltage.

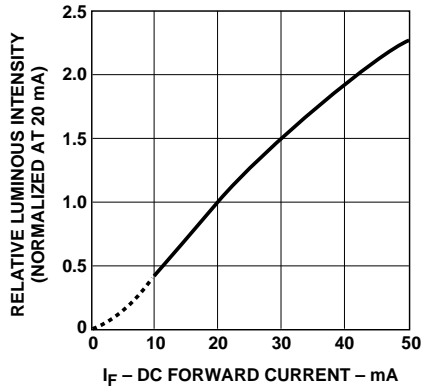


Figure 3. Relative Luminous Intensity vs. Forward Current.

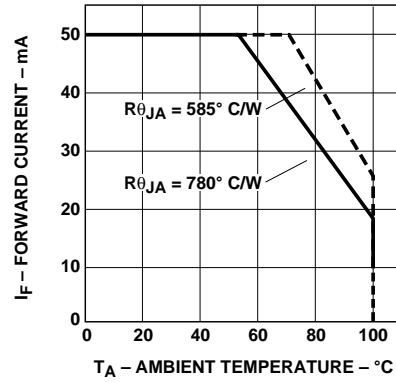


Figure 4. Maximum Forward Current vs. Ambient Temperature. Derating Based on $T_{JMAX} = 130^{\circ}C$.

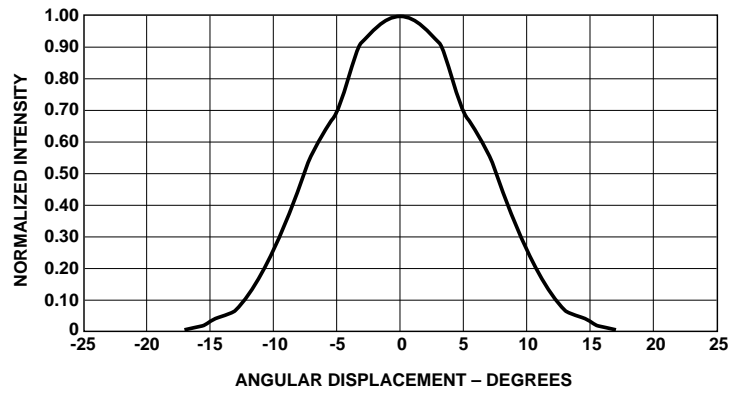


Figure 5. Representative Spatial Radiation Pattern for 15° Viewing Angle Lamps.

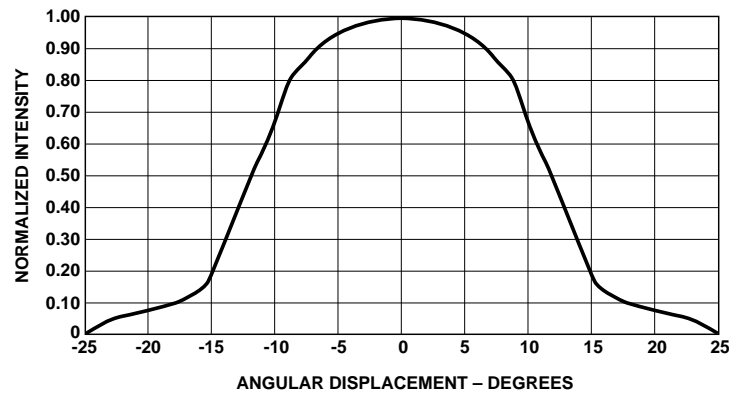


Figure 6. Representative Spatial Radiation Pattern for 24° Viewing Angle Lamps.

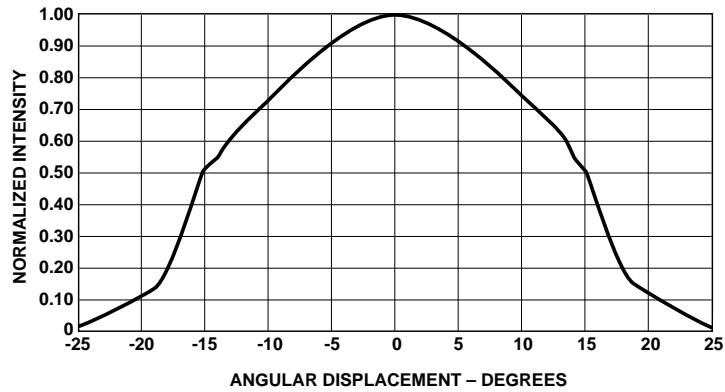


Figure 7. Representative Spatial Radiation Pattern for 30° Viewing Angle Lamps.

Intensity Bin Limits (mcd at 20 mA)

Bin Name	Min.	Max.
P	880	1150
Q	1150	1500
R	1500	1900
S	1900	2500
T	2500	3200
U	3200	4200
V	4200	5500
W	5500	7200
X	7200	9300
Y	9300	12000
Z	12000	16000

Tolerance for each bin limit is
± 15%.

Amber Color Bin Limits (nm at 20 mA)

Bin Name	Min.	Max.
1	584.5	587.0
2	587.0	589.5
4	589.5	592.0
6	592.0	594.5
7	594.5	597.0

Tolerance for each bin limit is
± 0.5 nm.

Note:

1. Bin categories are established for classification of products. Products may not be available in all bin categories.

www.semiconductor.agilent.com

Data subject to change.
Copyright © 2001 Agilent Technologies, Inc.
August 27, 2001
Obsoletes 5968-4303E (11/99)
5988-2805EN