

Agilent MGA-61563

Current-Adjustable, Low Noise Amplifier

Data Sheet



Description

Agilent's MGA-61563 is an economical, easy-to-use GaAs MMIC amplifier that offers excellent linearity and low noise figure for applications from 0.1 to 6 GHz. Packaged in an miniature SOT-363 package, it requires half the board space of a SOT-143 package.

One external resistor is used to set the bias current taken by the device over a wide range. This allows the designer to use the same part in several circuit positions and tailor the linearity performance (and current consumption) to suit each position. The MGA-61563 is normally operating with I_d set in the 20-60mA range

The output of the amplifier is matched to 50Ω (below 2:1 VSWR) across the entire bandwidth and only requires minimum input matching. The amplifier allows a wide dynamic range by offering a 1.2 dB NF coupled with a +28.5 dBm Output IP3. The circuit uses state-of-the-art E-pHEMT technology with proven reliability. On-chip bias circuitry allows operation from a single +3V or +5V power supply, while internal feedback ensures stability ($K > 1$) over all frequencies.

Pin Connections and Package Marking

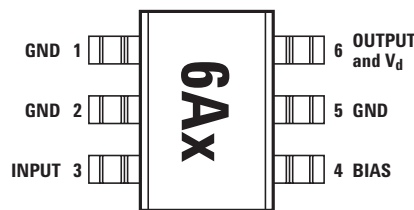

Note:

Package marking provides orientation and identification:

"6A" = Device Code

"X" = Date code indicates the month of manufacture.

Features

- Single +3V or + 5V supply
- High linearity
- Low noise figure
- Miniature SOT363 (SC70) package
- Unconditionally stable
- Lead-free option available

Specifications at 2 GHz; 3V, 41 mA (Typ.)

- 28.5 dBm OIP3
- 1.2 dB noise figure
- 16.6 dB gain
- 15.8 dBm P_{1dB}



Attention:
Observe precautions for handling electrostatic sensitive devices.

ESD Machine Model (Class A)


ESD Human Body Model (Class 0)

Refer to Agilent Application Note A004R:
Electrostatic Discharge Damage and Control.



Agilent Technologies

Simplified Schematic

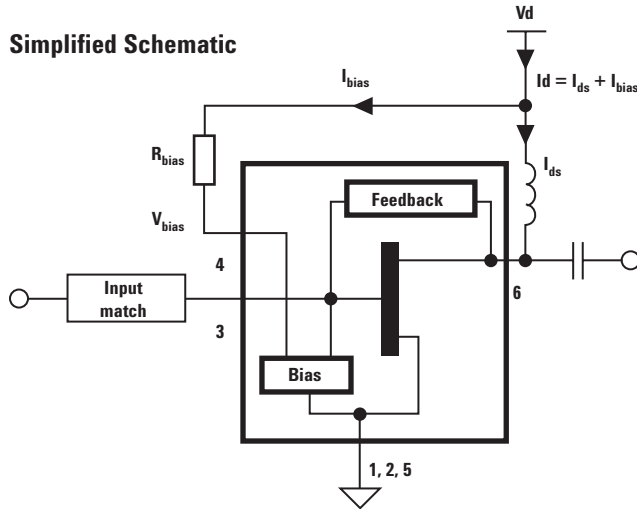

MGA-61563 Absolute Maximum Ratings^[1]

| Symbol | Parameter | Units | Absolute Maximum |
|------------------|--|-------|------------------|
| V_d | Device Voltage (pin 6) ^[2] | V | 6 |
| I_d | Device Current (pin 6) ^[2] | mA | 100 |
| P_{in} | CW RF Input Power (pin 3) ^[3] | dBm | 18 |
| I_{ref} | Bias Reference Current (pin 4) | mA | 10 |
| P_{diss} | Total Power Dissipation ^[4] | mW | 500 |
| T_{CH} | Channel Temperature | °C | 150 |
| T_{STG} | Storage Temperature | °C | 150 |
| θ_{ch_b} | Thermal Resistance ^[5] | °C/W | 115 |

Notes:

1. Operation of this device in excess of any one of these parameters may cause permanent damage.
2. Assumes DC quiescent conditions.
3. With the DC (typical bias) and RF applied to the device at board temperature $T_B = 25^\circ\text{C}$.
4. Total dissipation power is referred to lead "x" temperature. $T_c=92.5^\circ\text{C}$, derate P_{diss} at $8.7\text{mW}/^\circ\text{C}$ for $T_c>92.5^\circ\text{C}$.
5. Thermal resistance measured using 150°C Liquid Crystal Measurement method.

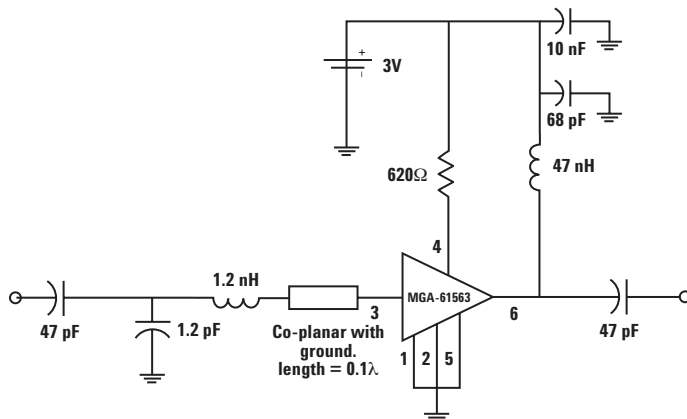


Figure 1. Test circuit of the 2 GHz production test board used for NF, Gain and OIP3 measurements. This circuit achieves a trade-off between optimal NF, Gain, OIP3 and input return loss. Circuit losses have been de-embedded from actual measurements.

Product Consistency Distribution Charts at 3V, 2 GHz, $R_{bias} = 620\Omega$ [1,2]

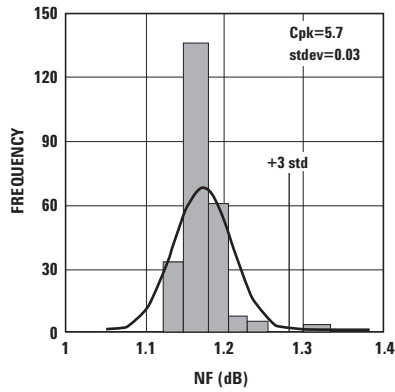


Figure 2. NF @ 2 GHz 3V 40 mA.
USL=1.8, Nominal=1.17.

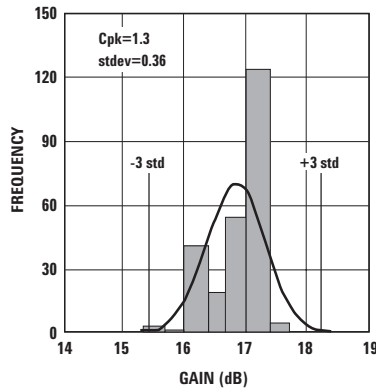


Figure 3. Gain @ 2 GHz 3V 40 mA.
USL=18, LSL=15, Nominal=16.6.

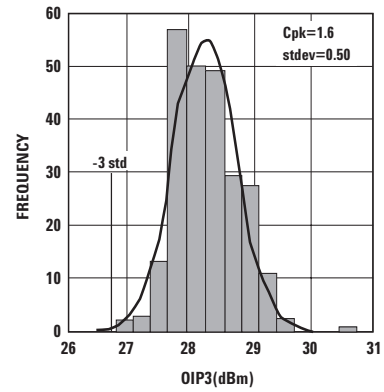


Figure 4. OIP3 @ 2 GHz 3V 40 mA.
LSL=26, Nominal=28.5.

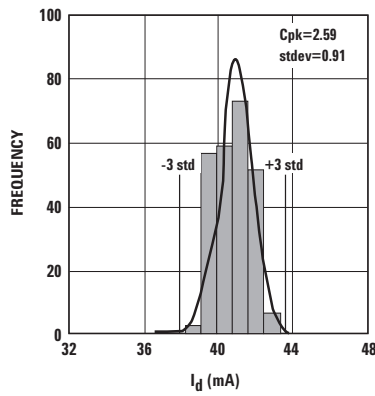


Figure 5. Id @ 3V.
LSL=32, USL=48, Nominal=41.0.

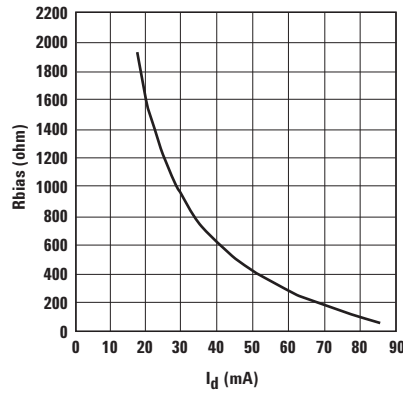


Figure 6. Rbias vs. Id (3V supply).

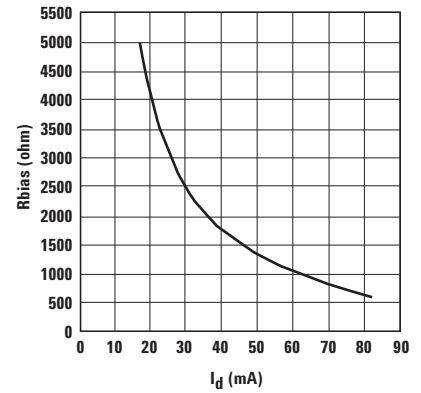


Figure 7. Rbias vs. Id (5V supply).

Note:

1. Measured on the production test circuit
2. Distribution data sample size is 250 samples taken from 5 different wafers. Future wafers allocated to this product may have nominal values anywhere between upper and lower limits.

MGA-61563 Electrical Specifications

R_{bias}=620ohm

T_C = 25°C, Z₀ = 50Ω, V_d = 3V (unless otherwise specified)

| Symbol | Parameters and Test Conditions | Freq | Units | Min. | Typ. | Max. | Std Dev |
|---------------------------------------|---|--|-------|------|--|------|---------|
| I _d ^[1,2] | Device Current | | mA | 32 | 41 | 48 | 0.91 |
| NF _{test} ^[1,2] | Noise Figure in test circuit ^[1] | f = 2.047 GHz | dB | | 1.17 | 1.8 | 0.03 |
| G _{test} ^[1,2] | Associated Gain in test circuit ^[1] | f = 2.047 GHz | dB | 15 | 16.6 | 18 | 0.36 |
| OIP3 _{test} ^[1,2] | Output 3 rd Order Intercept in test circuit ^[1] | f = 2 GHz | dBm | 26 | 28.5 | | 0.5 |
| NF _{50Ω} ^[3] | Noise Figure in 50Ω system | f = 0.2 GHz f = 0.5 GHz f = 1.0 GHz f = 2.0 GHz f = 3.0 GHz f = 4.0 GHz f = 5.0 GHz f = 6.0 GHz | dB | | 1.4 1.1 0.9 1.0 1.4 1.8 2.3 2.7 | | 0.03 |
| S ₂₁ ^{2 [3]} | Associated Gain in 50Ω system | f = 0.2 GHz f = 0.5 GHz f = 1.0 GHz f = 2.0 GHz f = 3.0 GHz f = 4.0 GHz f = 5.0 GHz f = 6.0 GHz | dB | | 21 20 19.3 15.5 12.4 10.4 8 6.9 | | 0.36 |
| OIP3 _{50Ω} ^[3] | Output 3 rd Order Intercept Point in 50Ω system | f = 0.2 GHz f = 0.5 GHz f = 1.0 GHz f = 2.0 GHz f = 3.0 GHz f = 4.0 GHz f = 5.0 GHz f = 6.0 GHz | dBm | | 29 29.8 30.5 31.7 30.9 30.6 30.6 30.7 | | 0.5 |
| P1dB _{50Ω} ^[3] | Output Power at 1dB Gain Compression in 50Ω system | f = 0.2 GHz f = 0.5 GHz f = 1.0 GHz f = 2.0 GHz f = 3.0 GHz f = 4.0 GHz f = 5.0 GHz f = 6.0 GHz | dBm | | 15.6 15.5 15.4 15.1 15.1 14.8 14.6 14.6 | | |

Notes:

1. Guaranteed specifications are 100% tested in the production test circuit as shown in Figure 1, the typical value is based on measurement of at least 500 parts from three non-consecutive wafer lots during initial characterization of this product.
2. Circuit achieved a trade-off between optimal NF, Gain, OIP3 and input return loss.
3. Parameter quoted at 50Ω is based on measurement of selected typical parts tested on a 50Ω input and output test fixture.

MGA-61563 Typical Performance, $V_d = 3V$, $I_{ds} = 40\text{ mA}$ at 50Ω Input and Output

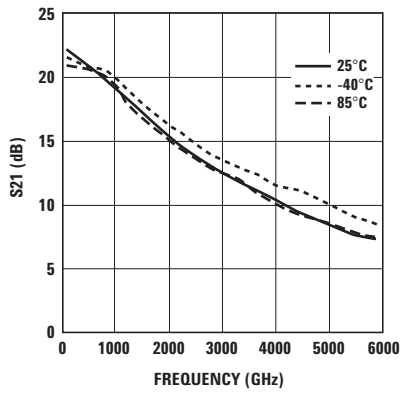


Figure 8. S21 vs. Frequency (3V 40 mA).

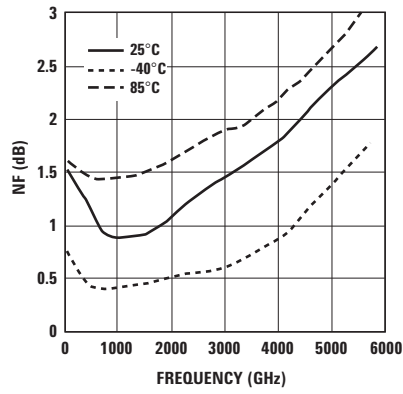


Figure 9. NF vs. Frequency (3V 40 mA).

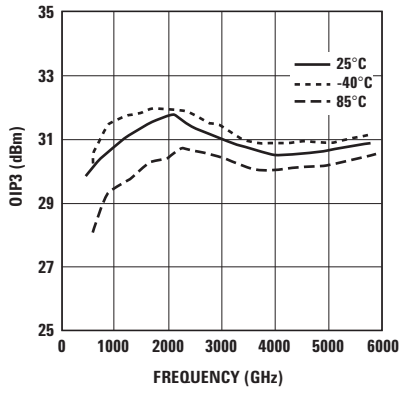


Figure 10. OIP3 vs. Frequency (3V 40 mA).

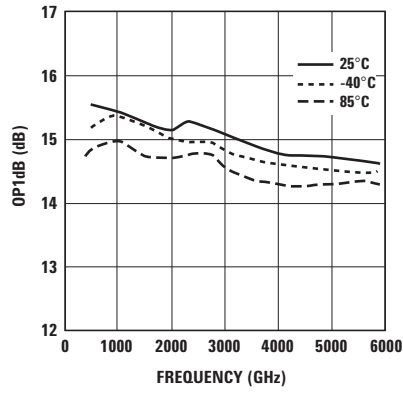


Figure 11. OP1dB vs. Frequency (3V 40 mA).

MGA-61563 Typical Performance, $V_d = 3V$, $I_{ds} = 20\text{ mA}$ at 50Ω Input and Output

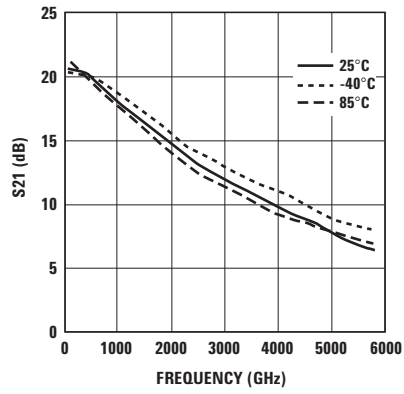


Figure 12. S21 vs. Freq (3V 20 mA).

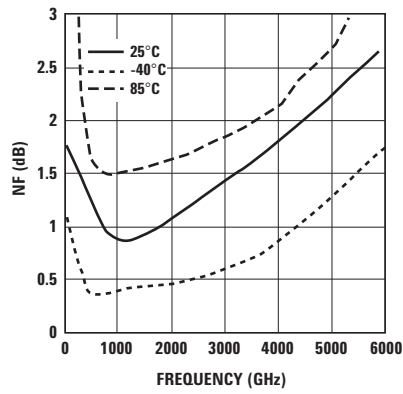


Figure 13. NF vs. Frequency (3V 20 mA).

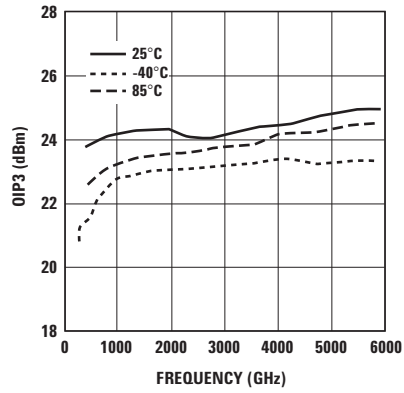


Figure 14. OIP3 vs. Frequency (3V 20 mA).

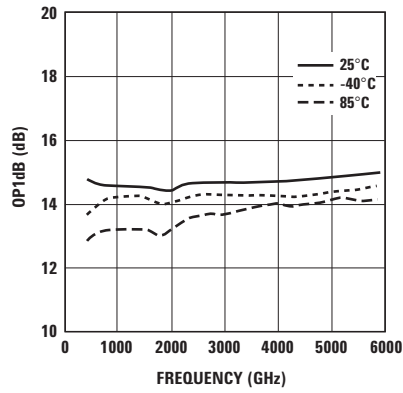


Figure 15. OP1dB vs. Frequency (3V 20 mA).

MGA-61563 Typical Performance, $V_d = 5V$, $I_{ds} = 40\text{ mA}$ at 50Ω Input and Output

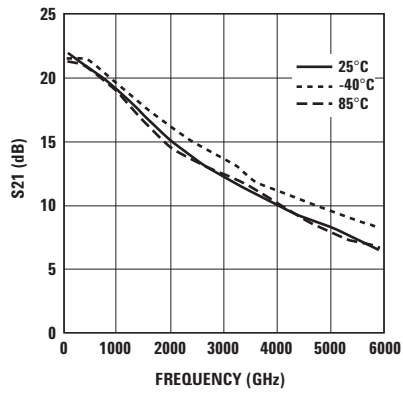


Figure 16. S21 vs. Frequency (5V 40 mA).

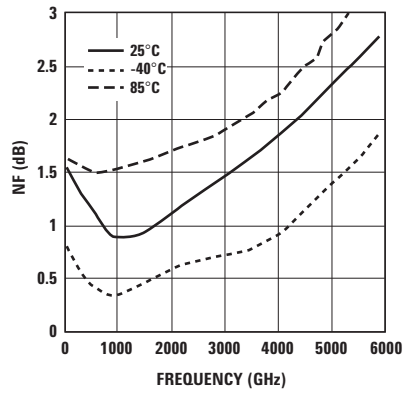


Figure 17. NF vs. Frequency (5V 40 mA).

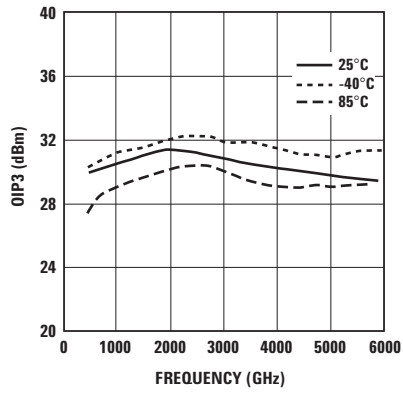


Figure 18. OIP3 vs. Frequency (5V 40 mA).

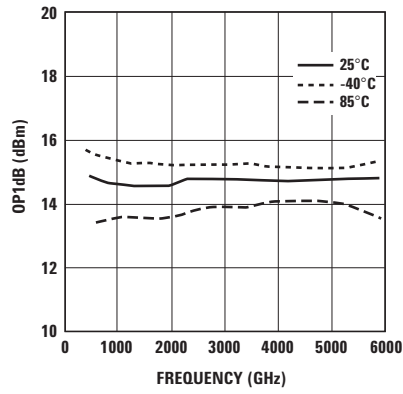


Figure 19. OP1dB vs. Frequency (5V 40 mA).

MGA-61563 Typical Performance, $V_d = 5V$, $I_{ds} = 20\text{ mA}$ at 50Ω Input and Output

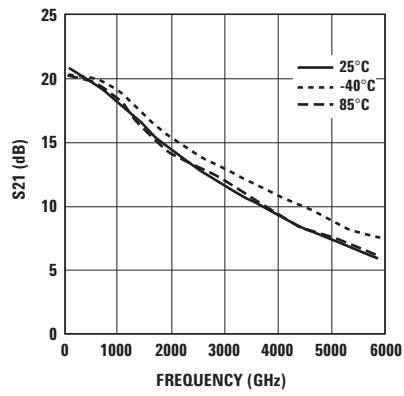


Figure 20. S21 vs. Frequency (5V 20 mA).

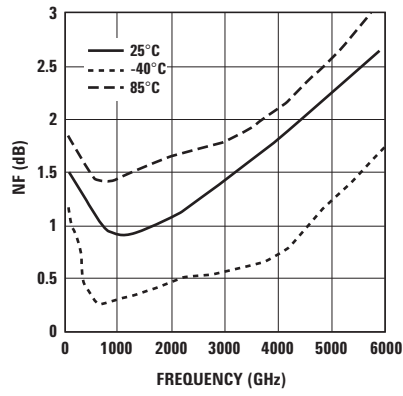


Figure 21. NF vs. Frequency (5V 20 mA).

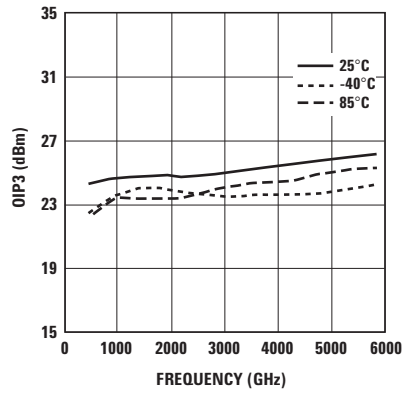


Figure 22. OIP3 vs. Frequency (5V 20 mA).

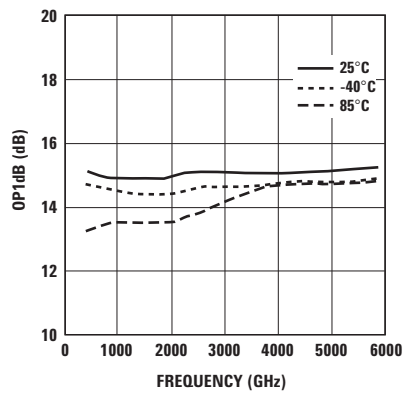


Figure 23. OP1dB vs. Frequency (5V 20 mA).

MGA-61563 Typical Performance, Freq = 2 GHz, $T_c = 25^\circ\text{C}$ at 50Ω Input and Output

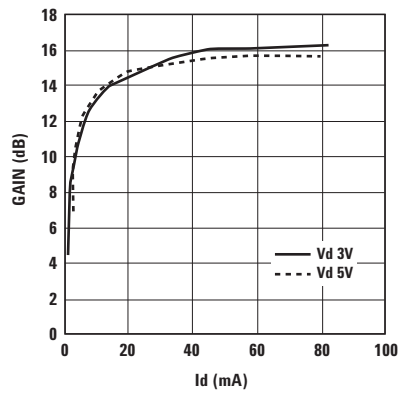


Figure 24. Gain vs. Id (2 GHz).

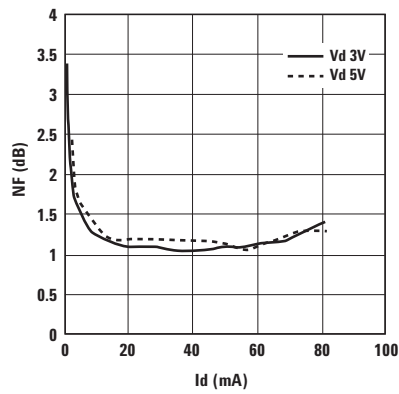


Figure 25. NF vs. Id (2 GHz).

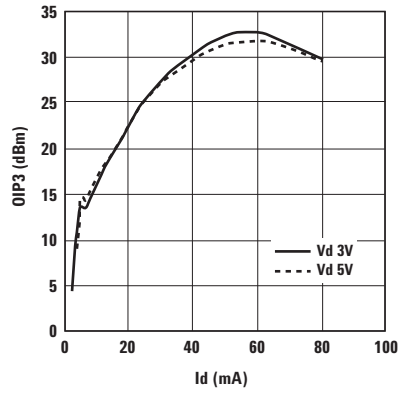


Figure 26. OIP3 vs. Id (2 GHz).

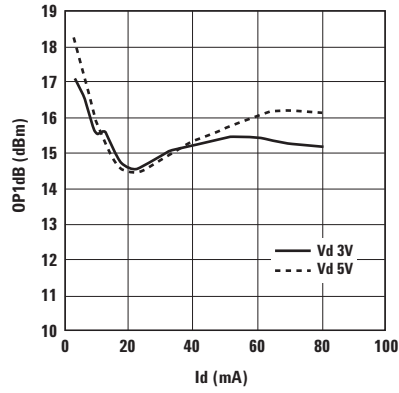


Figure 27. OP1dB vs. Id (2 GHz).

MGA-61563 Typical Performance, Freq = 0.9 GHz, $T_c = 25^\circ\text{C}$ at 50Ω Input and Output

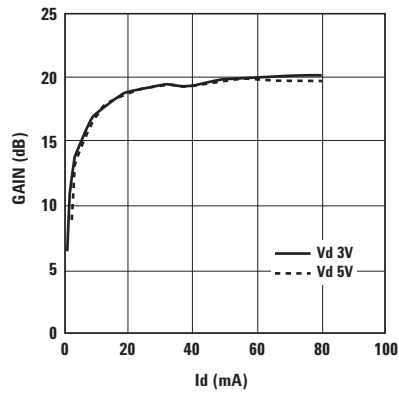


Figure 28. Gain vs. Id (900 MHz).

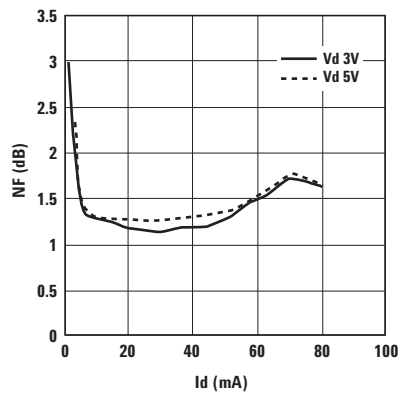


Figure 29. NF vs. Id (900 MHz).

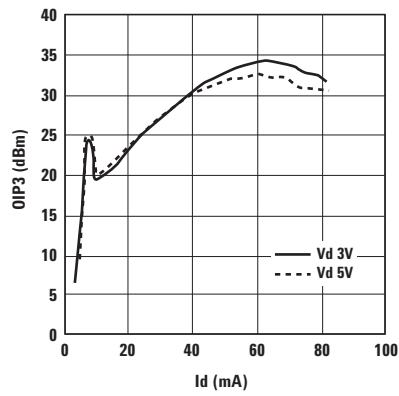


Figure 30. OIP3 vs. Id (900 MHz).

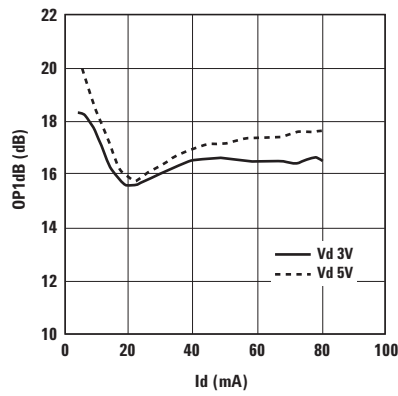


Figure 31. OP1dB vs. Id (900 MHz).

MGA-61563 Typical Scattering Parameters, $T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 3\text{V}$, $I_{ds} = 40\text{mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | S_{12} | | S_{22} | | K-factor |
|--------------|----------|----------|-------|----------|---------|----------|---------|----------|----------|----------|
| | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. | Mag. | Ang. | |
| 0.1 | 0.244 | -52.826 | 21.78 | 12.271 | 158.389 | 0.051 | 3.716 | 0.072 | -77.426 | 1.05 |
| 0.2 | 0.236 | -58.111 | 21.57 | 11.976 | 156.012 | 0.05 | 3.134 | 0.065 | -86.51 | 1.08 |
| 0.3 | 0.23 | -64.265 | 21.33 | 11.649 | 153.359 | 0.05 | 2.551 | 0.06 | -97.578 | 1.09 |
| 0.4 | 0.227 | -71.238 | 21.06 | 11.296 | 150.415 | 0.05 | 2.01 | 0.056 | -110.098 | 1.11 |
| 0.5 | 0.226 | -79.33 | 20.75 | 10.904 | 146.968 | 0.049 | 1.489 | 0.055 | -123.83 | 1.14 |
| 0.6 | 0.229 | -87.315 | 20.45 | 10.527 | 143.4 | 0.049 | 1.064 | 0.056 | -135.935 | 1.16 |
| 0.7 | 0.235 | -95.355 | 20.13 | 10.154 | 139.497 | 0.049 | 0.721 | 0.058 | -146.064 | 1.18 |
| 0.8 | 0.245 | -103.135 | 19.82 | 9.798 | 135.232 | 0.048 | 0.467 | 0.063 | -154.126 | 1.22 |
| 0.9 | 0.258 | -110.09 | 19.54 | 9.482 | 130.652 | 0.048 | 0.347 | 0.068 | -160.307 | 1.24 |
| 1 | 0.275 | -116.228 | 19.27 | 9.193 | 125.989 | 0.047 | 0.51 | 0.073 | -163.445 | 1.27 |
| 1.1 | 0.292 | -122.194 | 18.98 | 8.888 | 121.13 | 0.047 | 0.928 | 0.079 | -165.335 | 1.28 |
| 1.2 | 0.307 | -127.351 | 18.69 | 8.601 | 116.692 | 0.047 | 1.513 | 0.084 | -166.694 | 1.3 |
| 1.3 | 0.32 | -130.903 | 18.39 | 8.308 | 112.463 | 0.046 | 2.307 | 0.083 | -166.078 | 1.34 |
| 1.4 | 0.329 | -133.391 | 18.08 | 8.015 | 108.444 | 0.046 | 3.321 | 0.078 | -163.135 | 1.37 |
| 1.5 | 0.339 | -135.838 | 17.76 | 7.727 | 104.561 | 0.046 | 4.462 | 0.073 | -158.92 | 1.4 |
| 1.6 | 0.348 | -138.798 | 17.43 | 7.442 | 100.879 | 0.046 | 5.633 | 0.068 | -155.687 | 1.43 |
| 1.7 | 0.355 | -142.049 | 17.09 | 7.152 | 97.114 | 0.046 | 6.951 | 0.062 | -149.155 | 1.47 |
| 1.8 | 0.359 | -145.16 | 16.76 | 6.89 | 93.742 | 0.047 | 8.269 | 0.059 | -142.409 | 1.48 |
| 1.9 | 0.36 | -148.258 | 16.45 | 6.643 | 90.533 | 0.047 | 9.619 | 0.058 | -135.389 | 1.53 |
| 2 | 0.361 | -151.227 | 16.14 | 6.412 | 87.449 | 0.048 | 10.948 | 0.057 | -128.787 | 1.54 |
| 2.5 | 0.363 | -165.518 | 14.73 | 5.45 | 72.871 | 0.054 | 16.239 | 0.059 | -98.235 | 1.6 |
| 3 | 0.352 | 175.694 | 13.46 | 4.711 | 59.275 | 0.062 | 18.051 | 0.07 | -80.793 | 1.61 |
| 3.5 | 0.38 | 161.243 | 12.45 | 4.195 | 45.386 | 0.073 | 15.785 | 0.085 | -54.713 | 1.52 |
| 4 | 0.425 | 144.109 | 11.37 | 3.703 | 31.615 | 0.084 | 12.477 | 0.102 | -49.393 | 1.43 |
| 4.5 | 0.51 | 134.382 | 10.45 | 3.329 | 18.734 | 0.095 | 5.411 | 0.096 | -47.475 | 1.29 |
| 5 | 0.593 | 117.447 | 9.32 | 2.923 | 3.55 | 0.103 | -1.829 | 0.088 | -42.299 | 1.2 |
| 5.5 | 0.645 | 108.198 | 8.29 | 2.596 | -6.214 | 0.112 | -7.541 | 0.065 | -76.731 | 1.12 |
| 6 | 0.699 | 95.764 | 7.93 | 2.493 | -19.424 | 0.118 | -14.437 | 0.044 | 170.599 | 1 |
| 6.5 | 0.681 | 86.306 | 6.96 | 2.229 | -28.714 | 0.126 | -20.93 | 0.115 | 128.986 | 1.09 |
| 7 | 0.688 | 75.175 | 6.86 | 2.203 | -41.406 | 0.133 | -29.043 | 0.194 | 102.725 | 1.06 |
| 7.5 | 0.665 | 63.103 | 5.97 | 1.989 | -54.247 | 0.136 | -36.279 | 0.217 | 85.554 | 1.19 |
| 8 | 0.656 | 53.026 | 5.58 | 1.902 | -63.34 | 0.145 | -42.738 | 0.23 | 78.813 | 1.2 |
| 9 | 0.701 | 33.219 | 4.92 | 1.762 | -84.127 | 0.156 | -59.549 | 0.262 | 54.067 | 1.11 |
| 10 | 0.762 | 21.101 | 4.43 | 1.666 | -99.91 | 0.157 | -74.343 | 0.307 | 28.064 | 1.03 |

Typical Noise Parameters at 25°C ,

$T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 3\text{V}$, $I_{ds} = 40\text{mA}$

| Freq GHz | F_{min} dB | Γ_{opt} Mag. | Γ_{opt} Ang. | $R_n/50$ | NF@50Ω dB |
|-------------|-----------------|------------------------|------------------------|----------|--------------|
| 0.5 | 0.65 | 0.02 | 84.7 | 0.09 | 0.65 |
| 1 | 0.59 | 0.05 | 146.6 | 0.08 | 0.6 |
| 1.5 | 0.71 | 0.09 | 154.5 | 0.08 | 0.72 |
| 2 | 0.81 | 0.1 | 135 | 0.09 | 0.83 |
| 2.5 | 0.86 | 0.12 | 166.7 | 0.08 | 0.89 |
| 3 | 0.91 | 0.18 | -177.3 | 0.08 | 0.96 |
| 3.5 | 0.99 | 0.19 | -161.8 | 0.09 | 1.05 |
| 4 | 1.11 | 0.23 | -152.3 | 0.1 | 1.22 |
| 4.5 | 1.21 | 0.28 | -141.5 | 0.11 | 1.38 |
| 5 | 1.29 | 0.32 | -130.3 | 0.12 | 1.53 |
| 5.5 | 1.36 | 0.35 | -121.5 | 0.16 | 1.68 |
| 6 | 1.47 | 0.39 | -110.7 | 0.19 | 1.87 |
| 6.5 | 1.56 | 0.44 | -100.5 | 0.26 | 2.1 |
| 7 | 1.58 | 0.48 | -91.2 | 0.32 | 2.27 |
| 7.5 | 1.79 | 0.51 | -80.2 | 0.43 | 2.61 |
| 8 | 1.88 | 0.54 | -69.2 | 0.57 | 2.88 |
| 8.5 | 2 | 0.6 | -58.7 | 0.76 | 3.3 |
| 9 | 2.14 | 0.63 | -47.7 | 0.99 | 3.68 |
| 9.5 | 2.15 | 0.69 | -41.9 | 1.22 | 4.09 |
| 10 | 2.16 | 0.71 | -35.4 | 1.48 | 4.43 |

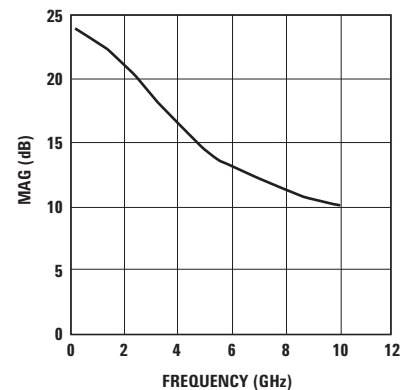


Figure 32. MAG vs. Frequency.

MGA-61563 Typical Scattering Parameters, $T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 3\text{V}$, $I_{ds} = 30\text{mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | S_{12} | | S_{22} | | K-factor |
|--------------|----------|----------|-------|----------|----------|----------|---------|----------|----------|----------|
| | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. | Mag. | Ang. | |
| 0.1 | 0.268 | -48.517 | 21.29 | 11.602 | 158.574 | 0.054 | 4.469 | 0.092 | -62.567 | 1.05 |
| 0.2 | 0.258 | -53.469 | 21.09 | 11.332 | 156.225 | 0.053 | 3.812 | 0.083 | -69.778 | 1.07 |
| 0.3 | 0.251 | -59.275 | 20.85 | 11.03 | 153.589 | 0.053 | 3.14 | 0.075 | -78.771 | 1.08 |
| 0.4 | 0.246 | -65.933 | 20.59 | 10.704 | 150.671 | 0.053 | 2.503 | 0.069 | -89.392 | 1.1 |
| 0.5 | 0.243 | -73.772 | 20.29 | 10.339 | 147.255 | 0.052 | 1.867 | 0.065 | -101.948 | 1.13 |
| 0.6 | 0.244 | -81.634 | 19.99 | 9.99 | 143.707 | 0.052 | 1.318 | 0.063 | -114.085 | 1.15 |
| 0.7 | 0.248 | -89.688 | 19.69 | 9.645 | 139.832 | 0.051 | 0.836 | 0.064 | -125.177 | 1.18 |
| 0.8 | 0.255 | -97.59 | 19.38 | 9.314 | 135.602 | 0.051 | 0.435 | 0.068 | -134.833 | 1.2 |
| 0.9 | 0.267 | -104.804 | 19.11 | 9.021 | 131.063 | 0.051 | 0.201 | 0.073 | -142.722 | 1.22 |
| 1 | 0.283 | -111.271 | 18.84 | 8.752 | 126.423 | 0.05 | 0.265 | 0.079 | -147.664 | 1.24 |
| 1.1 | 0.3 | -117.585 | 18.56 | 8.469 | 121.591 | 0.05 | 0.555 | 0.087 | -151.397 | 1.26 |
| 1.2 | 0.314 | -123.03 | 18.28 | 8.202 | 117.173 | 0.05 | 0.989 | 0.094 | -154.377 | 1.27 |
| 1.3 | 0.326 | -126.855 | 17.98 | 7.929 | 112.956 | 0.049 | 1.629 | 0.095 | -154.689 | 1.31 |
| 1.4 | 0.336 | -129.586 | 17.68 | 7.654 | 108.945 | 0.049 | 2.492 | 0.092 | -152.631 | 1.33 |
| 1.5 | 0.347 | -132.266 | 17.36 | 7.381 | 105.063 | 0.049 | 3.452 | 0.089 | -149.881 | 1.36 |
| 1.6 | 0.355 | -135.421 | 17.04 | 7.111 | 101.376 | 0.049 | 4.442 | 0.085 | -148.048 | 1.39 |
| 1.7 | 0.362 | -138.83 | 16.7 | 6.837 | 97.605 | 0.049 | 5.577 | 0.081 | -143.895 | 1.43 |
| 1.8 | 0.366 | -142.061 | 16.38 | 6.589 | 94.237 | 0.05 | 6.72 | 0.079 | -139.902 | 1.44 |
| 1.9 | 0.367 | -145.269 | 16.06 | 6.353 | 91.02 | 0.05 | 7.91 | 0.077 | -135.856 | 1.49 |
| 2 | 0.367 | -148.31 | 15.75 | 6.134 | 87.927 | 0.051 | 9.081 | 0.076 | -132.128 | 1.5 |
| 2.5 | 0.369 | -162.886 | 14.37 | 5.228 | 73.233 | 0.056 | 13.854 | 0.069 | -112.239 | 1.59 |
| 3 | 0.358 | 178.083 | 13.13 | 4.532 | 59.415 | 0.065 | 15.479 | 0.07 | -95.256 | 1.6 |
| 3.5 | 0.387 | 163.252 | 12.14 | 4.044 | 45.371 | 0.075 | 13.321 | 0.071 | -63.465 | 1.53 |
| 4 | 0.431 | 145.58 | 11.07 | 3.577 | 31.36 | 0.086 | 10.193 | 0.085 | -52.459 | 1.44 |
| 4.5 | 0.516 | 135.43 | 10.15 | 3.218 | 18.295 | 0.097 | 3.143 | 0.079 | -47.033 | 1.31 |
| 5 | 0.598 | 118.103 | 9.04 | 2.833 | 2.86 | 0.104 | -3.984 | 0.075 | -37.084 | 1.23 |
| 5.5 | 0.648 | 108.768 | 8.02 | 2.518 | -7.048 | 0.113 | -9.465 | 0.051 | -77.715 | 1.14 |
| 6 | 0.702 | 96.188 | 7.7 | 2.426 | -20.33 | 0.118 | -16.213 | 0.05 | 153.974 | 1.02 |
| 6.5 | 0.683 | 86.691 | 6.75 | 2.175 | -29.679 | 0.127 | -22.597 | 0.128 | 124.845 | 1.1 |
| 7 | 0.69 | 75.529 | 6.67 | 2.156 | -42.376 | 0.134 | -30.746 | 0.209 | 100.751 | 1.06 |
| 7.5 | 0.666 | 63.34 | 5.81 | 1.952 | -55.232 | 0.137 | -37.846 | 0.231 | 83.842 | 1.19 |
| 8 | 0.657 | 53.281 | 5.44 | 1.871 | -64.235 | 0.145 | -44.143 | 0.243 | 76.982 | 1.2 |
| 9 | 0.703 | 33.453 | 4.82 | 1.741 | -84.776 | 0.156 | -60.778 | 0.273 | 52.604 | 1.12 |
| 10 | 0.763 | 21.176 | 4.33 | 1.647 | -100.492 | 0.157 | -75.625 | 0.318 | 27.144 | 1.03 |

Typical Noise Parameters at 25°C,
 $T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 3\text{V}$, $I_{ds} = 30\text{mA}$

| Freq GHz | F_{min} dB | Γ_{opt} Mag. | Γ_{opt} Ang. | $R_n/50$ | NF@50Ω dB |
|-------------|-----------------|------------------------|------------------------|----------|--------------|
| 0.5 | 0.77 | 0.11 | 63.4 | 0.12 | 0.79 |
| 1 | 0.62 | 0.05 | 129.5 | 0.08 | 0.62 |
| 1.5 | 0.72 | 0.07 | 153.9 | 0.08 | 0.73 |
| 2 | 0.82 | 0.1 | 129.6 | 0.09 | 0.83 |
| 2.5 | 0.87 | 0.12 | 159.3 | 0.08 | 0.89 |
| 3 | 0.9 | 0.17 | 178.3 | 0.08 | 0.95 |
| 3.5 | 0.97 | 0.19 | -166.1 | 0.09 | 1.03 |
| 4 | 1.09 | 0.23 | -155.1 | 0.09 | 1.19 |
| 4.5 | 1.2 | 0.27 | -144.2 | 0.1 | 1.35 |
| 5 | 1.25 | 0.32 | -132.2 | 0.12 | 1.48 |
| 5.5 | 1.34 | 0.35 | -123 | 0.15 | 1.64 |
| 6 | 1.45 | 0.38 | -113.4 | 0.18 | 1.81 |
| 6.5 | 1.55 | 0.43 | -101.8 | 0.24 | 2.04 |
| 7 | 1.58 | 0.46 | -92.6 | 0.3 | 2.19 |
| 7.5 | 1.75 | 0.5 | -81.5 | 0.4 | 2.52 |
| 8 | 1.88 | 0.52 | -70.5 | 0.54 | 2.79 |
| 8.5 | 2 | 0.59 | -59.6 | 0.72 | 3.21 |
| 9 | 2.1 | 0.62 | -49 | 0.93 | 3.57 |
| 9.5 | 2.07 | 0.7 | -42.8 | 1.15 | 3.99 |
| 10 | 2.14 | 0.71 | -36.3 | 1.4 | 4.31 |

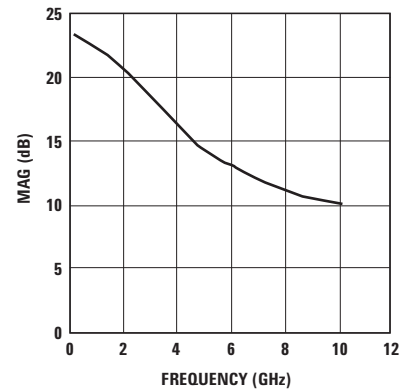


Figure 33. MAG vs. Frequency.

MGA-61563 Typical Scattering Parameters, $T_C = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 3\text{V}$, $I_{ds} = 20\text{mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | S_{12} | | S_{22} | | K-factor |
|--------------|----------|----------|-------|----------|----------|----------|---------|----------|----------|----------|
| | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. | Mag. | Ang. | |
| 0.1 | 0.317 | -41.61 | 20.39 | 10.456 | 159.109 | 0.058 | 4.817 | 0.143 | -45.403 | 1.04 |
| 0.2 | 0.306 | -45.966 | 20.2 | 10.23 | 156.718 | 0.058 | 4.054 | 0.131 | -50.236 | 1.06 |
| 0.3 | 0.296 | -51.142 | 19.98 | 9.976 | 154.046 | 0.058 | 3.271 | 0.119 | -56.144 | 1.07 |
| 0.4 | 0.288 | -57.155 | 19.74 | 9.704 | 151.101 | 0.058 | 2.496 | 0.108 | -63.134 | 1.08 |
| 0.5 | 0.281 | -64.371 | 19.46 | 9.392 | 147.615 | 0.057 | 1.698 | 0.098 | -71.761 | 1.11 |
| 0.6 | 0.278 | -71.779 | 19.17 | 9.093 | 144.033 | 0.057 | 0.976 | 0.091 | -80.944 | 1.13 |
| 0.7 | 0.278 | -79.591 | 18.89 | 8.798 | 140.143 | 0.056 | 0.298 | 0.087 | -90.694 | 1.16 |
| 0.8 | 0.282 | -87.467 | 18.6 | 8.516 | 135.916 | 0.056 | -0.314 | 0.086 | -100.877 | 1.18 |
| 0.9 | 0.291 | -94.88 | 18.35 | 8.268 | 131.414 | 0.056 | -0.765 | 0.089 | -110.691 | 1.19 |
| 1 | 0.304 | -101.73 | 18.11 | 8.043 | 126.841 | 0.055 | -0.94 | 0.094 | -118.635 | 1.21 |
| 1.1 | 0.319 | -108.492 | 17.85 | 7.804 | 122.074 | 0.055 | -0.918 | 0.101 | -125.589 | 1.22 |
| 1.2 | 0.332 | -114.307 | 17.59 | 7.578 | 117.72 | 0.055 | -0.746 | 0.109 | -131.351 | 1.23 |
| 1.3 | 0.344 | -118.555 | 17.31 | 7.34 | 113.555 | 0.054 | -0.378 | 0.112 | -133.452 | 1.26 |
| 1.4 | 0.354 | -121.708 | 17.02 | 7.094 | 109.6 | 0.054 | 0.196 | 0.112 | -132.928 | 1.28 |
| 1.5 | 0.365 | -124.791 | 16.72 | 6.852 | 105.757 | 0.054 | 0.873 | 0.112 | -132.032 | 1.3 |
| 1.6 | 0.374 | -128.258 | 16.41 | 6.611 | 102.099 | 0.054 | 1.593 | 0.11 | -131.702 | 1.33 |
| 1.7 | 0.38 | -131.932 | 16.08 | 6.367 | 98.359 | 0.054 | 2.446 | 0.109 | -129.768 | 1.36 |
| 1.8 | 0.384 | -135.369 | 15.77 | 6.144 | 95.013 | 0.054 | 3.34 | 0.108 | -128.085 | 1.39 |
| 1.9 | 0.385 | -138.717 | 15.47 | 5.933 | 91.816 | 0.054 | 4.303 | 0.107 | -126.452 | 1.43 |
| 2 | 0.385 | -141.873 | 15.17 | 5.735 | 88.751 | 0.055 | 5.276 | 0.107 | -125.046 | 1.45 |
| 2.5 | 0.386 | -156.845 | 13.84 | 4.919 | 74.118 | 0.06 | 9.497 | 0.095 | -116.467 | 1.54 |
| 3 | 0.372 | -176.34 | 12.65 | 4.292 | 60.211 | 0.067 | 11.134 | 0.088 | -105.677 | 1.6 |
| 3.5 | 0.401 | 168.241 | 11.64 | 3.818 | 46.163 | 0.076 | 9.198 | 0.077 | -84.858 | 1.56 |
| 4 | 0.44 | 149.229 | 10.64 | 3.404 | 32.101 | 0.087 | 7.141 | 0.073 | -65.916 | 1.48 |
| 4.5 | 0.523 | 138.325 | 9.7 | 3.054 | 18.83 | 0.098 | 0.17 | 0.062 | -57.413 | 1.34 |
| 5 | 0.604 | 120.138 | 8.67 | 2.712 | 3.31 | 0.105 | -6.954 | 0.059 | -28.01 | 1.26 |
| 5.5 | 0.654 | 110.499 | 7.51 | 2.375 | -7.142 | 0.112 | -12.561 | 0.047 | -80.372 | 1.19 |
| 6 | 0.705 | 97.495 | 7.15 | 2.279 | -20.172 | 0.12 | -18.203 | 0.052 | 155.488 | 1.04 |
| 6.5 | 0.686 | 88.014 | 6.21 | 2.045 | -29.442 | 0.127 | -23.665 | 0.132 | 131.406 | 1.13 |
| 7 | 0.689 | 76.575 | 6.14 | 2.027 | -42.37 | 0.134 | -32.387 | 0.22 | 103.966 | 1.09 |
| 7.5 | 0.666 | 64.483 | 5.3 | 1.84 | -55.579 | 0.138 | -39.614 | 0.245 | 86.823 | 1.22 |
| 8 | 0.655 | 53.916 | 4.84 | 1.746 | -65.154 | 0.143 | -46.431 | 0.258 | 77.488 | 1.27 |
| 9 | 0.701 | 34.103 | 4.22 | 1.626 | -85.653 | 0.155 | -62.116 | 0.281 | 53.258 | 1.17 |
| 10 | 0.763 | 21.618 | 3.77 | 1.544 | -101.686 | 0.156 | -76.563 | 0.324 | 27.685 | 1.06 |

Typical Noise Parameters at 25°C ,

$T_C = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 3\text{V}$, $I_{ds} = 20\text{mA}$

| Freq GHz | F_{min} dB | Γ_{opt} Mag. | Γ_{opt} Ang. | $R_n/50$ | NF@50Ω dB |
|-------------|-----------------|------------------------|------------------------|----------|--------------|
| 0.5 | 0.83 | 0.16 | 73.5 | 0.14 | 0.87 |
| 1 | 0.65 | 0.06 | 102.7 | 0.09 | 0.65 |
| 1.5 | 0.75 | 0.08 | 130.2 | 0.08 | 0.76 |
| 2 | 0.84 | 0.11 | 116.9 | 0.09 | 0.85 |
| 2.5 | 0.89 | 0.13 | 146.5 | 0.09 | 0.91 |
| 3 | 0.92 | 0.17 | 169.2 | 0.08 | 0.97 |
| 3.5 | 0.99 | 0.19 | -173.3 | 0.08 | 1.06 |
| 4 | 1.1 | 0.23 | -159.9 | 0.09 | 1.21 |
| 4.5 | 1.19 | 0.27 | -148 | 0.1 | 1.35 |
| 5 | 1.28 | 0.31 | -136.6 | 0.11 | 1.5 |
| 5.5 | 1.35 | 0.34 | -126.6 | 0.14 | 1.64 |
| 6 | 1.48 | 0.37 | -116.7 | 0.17 | 1.83 |
| 6.5 | 1.57 | 0.41 | -104.4 | 0.23 | 2.04 |
| 7 | 1.61 | 0.45 | -95.6 | 0.29 | 2.2 |
| 7.5 | 1.8 | 0.49 | -83.8 | 0.39 | 2.53 |
| 8 | 1.9 | 0.51 | -72.7 | 0.52 | 2.79 |
| 8.5 | 2.04 | 0.58 | -61.7 | 0.7 | 3.21 |
| 9 | 2.15 | 0.61 | -50.6 | 0.9 | 3.55 |
| 9.5 | 2.14 | 0.67 | -44 | 1.14 | 3.95 |
| 10 | 2.15 | 0.7 | -37.2 | 1.39 | 4.29 |

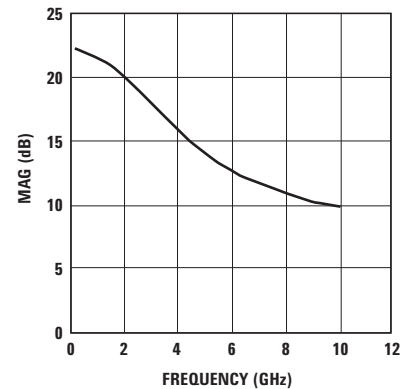


Figure 34. MAG vs. Frequency.

MGA-61563 Typical Scattering Parameters, $T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 5\text{V}$, $I_{ds} = 40\text{mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | S_{12} | | S_{22} | | K-factor |
|--------------|----------|----------|-------|----------|----------|----------|---------|----------|---------|----------|
| | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. | Mag. | Ang. | |
| 0.1 | 0.258 | -51.172 | 21.73 | 12.198 | 158.061 | 0.052 | 2.014 | 0.099 | -40.087 | 1.05 |
| 0.2 | 0.25 | -56.504 | 21.51 | 11.904 | 155.623 | 0.051 | 1.092 | 0.088 | -41.652 | 1.08 |
| 0.3 | 0.244 | -62.709 | 21.27 | 11.575 | 152.898 | 0.051 | 0.144 | 0.077 | -43.544 | 1.09 |
| 0.4 | 0.24 | -69.739 | 21 | 11.221 | 149.889 | 0.05 | -0.783 | 0.067 | -45.521 | 1.12 |
| 0.5 | 0.24 | -77.893 | 20.69 | 10.827 | 146.375 | 0.05 | -1.732 | 0.057 | -47.607 | 1.14 |
| 0.6 | 0.243 | -85.926 | 20.38 | 10.448 | 142.735 | 0.049 | -2.589 | 0.048 | -49.573 | 1.17 |
| 0.7 | 0.249 | -94.008 | 20.06 | 10.073 | 138.745 | 0.048 | -3.388 | 0.041 | -51.583 | 1.21 |
| 0.8 | 0.259 | -101.823 | 19.75 | 9.715 | 134.387 | 0.047 | -4.111 | 0.036 | -55.087 | 1.25 |
| 0.9 | 0.274 | -108.855 | 19.46 | 9.397 | 129.712 | 0.046 | -4.673 | 0.031 | -60.334 | 1.28 |
| 1 | 0.291 | -115.109 | 19.19 | 9.106 | 124.959 | 0.045 | -4.885 | 0.03 | -67.768 | 1.32 |
| 1.1 | 0.31 | -121.201 | 18.89 | 8.797 | 120.01 | 0.044 | -4.77 | 0.031 | -76.35 | 1.35 |
| 1.2 | 0.325 | -126.478 | 18.6 | 8.508 | 115.497 | 0.043 | -4.403 | 0.033 | -84.716 | 1.4 |
| 1.3 | 0.338 | -130.224 | 18.29 | 8.209 | 111.193 | 0.042 | -3.717 | 0.038 | -81.521 | 1.45 |
| 1.4 | 0.349 | -132.947 | 17.96 | 7.906 | 107.096 | 0.042 | -2.688 | 0.046 | -73.894 | 1.48 |
| 1.5 | 0.36 | -135.631 | 17.63 | 7.608 | 103.15 | 0.041 | -1.392 | 0.056 | -69.713 | 1.53 |
| 1.6 | 0.369 | -138.76 | 17.29 | 7.316 | 99.402 | 0.04 | 0.046 | 0.063 | -66.588 | 1.6 |
| 1.7 | 0.377 | -142.177 | 16.92 | 7.018 | 95.57 | 0.04 | 1.77 | 0.074 | -63.873 | 1.64 |
| 1.8 | 0.381 | -145.435 | 16.59 | 6.75 | 92.158 | 0.04 | 3.589 | 0.084 | -62.939 | 1.69 |
| 1.9 | 0.383 | -148.667 | 16.25 | 6.495 | 88.904 | 0.04 | 5.522 | 0.093 | -62.666 | 1.74 |
| 2 | 0.384 | -151.757 | 15.93 | 6.259 | 85.777 | 0.04 | 7.523 | 0.101 | -62.671 | 1.79 |
| 2.5 | 0.388 | -166.702 | 14.45 | 5.277 | 71.099 | 0.044 | 16.605 | 0.134 | -62.685 | 1.87 |
| 3 | 0.377 | 174.185 | 13.14 | 4.537 | 57.53 | 0.052 | 21.513 | 0.158 | -62.054 | 1.84 |
| 3.5 | 0.405 | 159.567 | 12.1 | 4.029 | 43.534 | 0.063 | 21.058 | 0.179 | -57.887 | 1.66 |
| 4 | 0.45 | 142.877 | 11 | 3.547 | 29.723 | 0.074 | 18.662 | 0.194 | -60.531 | 1.52 |
| 4.5 | 0.535 | 132.993 | 10.09 | 3.196 | 16.674 | 0.085 | 12.703 | 0.179 | -66.476 | 1.33 |
| 5 | 0.615 | 116.64 | 8.97 | 2.808 | 1.33 | 0.095 | 5.687 | 0.158 | -70.76 | 1.19 |
| 5.5 | 0.67 | 107.318 | 7.97 | 2.504 | -8.953 | 0.105 | -0.575 | 0.141 | -91.464 | 1.07 |
| 6 | 0.719 | 95.017 | 6.79 | 2.184 | -22.571 | 0.109 | -7.968 | 0.107 | -131.65 | 1.05 |
| 6.5 | 0.701 | 85.67 | 6.62 | 2.143 | -32.187 | 0.12 | -14.662 | 0.115 | 177.351 | 1.05 |
| 7 | 0.705 | 74.436 | 6.51 | 2.116 | -44.867 | 0.128 | -22.574 | 0.154 | 134.222 | 1.03 |
| 7.5 | 0.68 | 62.659 | 5.68 | 1.923 | -57.763 | 0.133 | -30.248 | 0.171 | 111.828 | 1.16 |
| 8 | 0.672 | 52.622 | 5.31 | 1.842 | -67.109 | 0.142 | -37.545 | 0.189 | 102.359 | 1.16 |
| 9 | 0.713 | 32.981 | 4.67 | 1.712 | -87.656 | 0.153 | -55.08 | 0.214 | 73.631 | 1.08 |
| 10 | 0.775 | 20.843 | 4.22 | 1.625 | -103.367 | 0.154 | -69.156 | 0.252 | 42.168 | 0.98 |

Typical Noise Parameters at 25°C ,

$T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 5\text{V}$, $I_{ds} = 40\text{mA}$

| Freq GHz | F_{min} dB | Γ_{opt} Mag. | Γ_{opt} Ang. | $R_n/50$ | NF@50Ω dB |
|-------------|-----------------|------------------------|------------------------|----------|--------------|
| 0.5 | 0.78 | 0.11 | 53.9 | 0.13 | 0.8 |
| 1 | 0.62 | 0.04 | 128.5 | 0.09 | 0.62 |
| 1.5 | 0.73 | 0.06 | 153.5 | 0.08 | 0.73 |
| 2 | 0.85 | 0.07 | 128.5 | 0.09 | 0.86 |
| 2.5 | 0.89 | 0.1 | 165.3 | 0.09 | 0.9 |
| 3 | 0.94 | 0.14 | -176.9 | 0.09 | 0.9 |
| 3.5 | 1 | 0.16 | -160 | 0.09 | 1.04 |
| 4 | 1.11 | 0.2 | -151.4 | 0.1 | 1.19 |
| 4.5 | 1.2 | 0.24 | -141 | 0.11 | 1.33 |
| 5 | 1.28 | 0.29 | -129.1 | 0.13 | 1.47 |
| 5.5 | 1.33 | 0.33 | -120.7 | 0.15 | 1.59 |
| 6 | 1.44 | 0.35 | -110.4 | 0.19 | 1.75 |
| 6.5 | 1.51 | 0.4 | -99.6 | 0.24 | 1.96 |
| 7 | 1.56 | 0.44 | -90.9 | 0.3 | 2.12 |
| 7.5 | 1.73 | 0.48 | -79.6 | 0.4 | 2.44 |
| 8 | 1.87 | 0.5 | -68.5 | 0.53 | 2.71 |
| 8.5 | 1.98 | 0.57 | -58.2 | 0.7 | 3.12 |
| 9 | 2.08 | 0.61 | -47.5 | 0.9 | 3.49 |
| 9.5 | 2.06 | 0.68 | -42 | 1.12 | 3.89 |
| 10 | 2.14 | 0.69 | -35.9 | 1.37 | 4.22 |

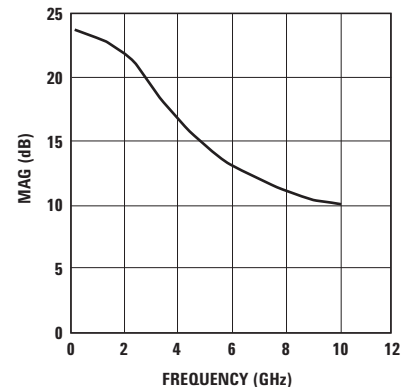


Figure 35. MAG vs. Frequency.

MGA-61563 Typical Scattering Parameters, $T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 5\text{V}$, $I_{ds} = 30\text{mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | S_{12} | | S_{22} | | K-factor |
|--------------|----------|----------|-------|----------|---------|----------|---------|----------|----------|----------|
| | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. | Mag. | Ang. | |
| 0.1 | 0.282 | -47.273 | 21.25 | 11.545 | 158.421 | 0.054 | 2.527 | 0.125 | -36.093 | 1.05 |
| 0.2 | 0.272 | -52.214 | 21.04 | 11.27 | 155.969 | 0.054 | 1.488 | 0.114 | -37.862 | 1.07 |
| 0.3 | 0.264 | -58.016 | 20.8 | 10.965 | 153.232 | 0.053 | 0.415 | 0.103 | -39.985 | 1.09 |
| 0.4 | 0.259 | -64.681 | 20.54 | 10.638 | 150.206 | 0.053 | -0.65 | 0.091 | -42.301 | 1.11 |
| 0.5 | 0.256 | -72.528 | 20.23 | 10.272 | 146.663 | 0.052 | -1.766 | 0.08 | -44.918 | 1.14 |
| 0.6 | 0.256 | -80.402 | 19.93 | 9.922 | 142.996 | 0.051 | -2.788 | 0.071 | -47.629 | 1.17 |
| 0.7 | 0.26 | -88.469 | 19.63 | 9.578 | 139 | 0.05 | -3.768 | 0.063 | -50.716 | 1.21 |
| 0.8 | 0.268 | -96.405 | 19.32 | 9.25 | 134.641 | 0.05 | -4.68 | 0.056 | -55.147 | 1.23 |
| 0.9 | 0.281 | -103.674 | 19.05 | 8.961 | 129.987 | 0.049 | -5.425 | 0.051 | -60.877 | 1.26 |
| 1 | 0.297 | -110.223 | 18.79 | 8.696 | 125.265 | 0.048 | -5.785 | 0.05 | -67.861 | 1.29 |
| 1.1 | 0.315 | -116.613 | 18.5 | 8.417 | 120.35 | 0.047 | -5.857 | 0.05 | -75.638 | 1.32 |
| 1.2 | 0.33 | -122.127 | 18.23 | 8.154 | 115.866 | 0.046 | -5.678 | 0.052 | -83.182 | 1.36 |
| 1.3 | 0.343 | -126.084 | 17.93 | 7.878 | 111.58 | 0.045 | -5.186 | 0.056 | -82.888 | 1.4 |
| 1.4 | 0.354 | -129.004 | 17.61 | 7.596 | 107.501 | 0.044 | -4.359 | 0.062 | -78.454 | 1.46 |
| 1.5 | 0.365 | -131.861 | 17.29 | 7.319 | 103.564 | 0.043 | -3.279 | 0.07 | -75.544 | 1.51 |
| 1.6 | 0.375 | -135.138 | 16.96 | 7.046 | 99.816 | 0.043 | -2.061 | 0.077 | -73.137 | 1.54 |
| 1.7 | 0.382 | -138.684 | 16.61 | 6.766 | 95.994 | 0.042 | -0.558 | 0.086 | -70.555 | 1.62 |
| 1.8 | 0.387 | -142.036 | 16.28 | 6.515 | 92.571 | 0.042 | 1.067 | 0.094 | -69.368 | 1.66 |
| 1.9 | 0.389 | -145.346 | 15.95 | 6.276 | 89.309 | 0.042 | 2.822 | 0.102 | -68.763 | 1.7 |
| 2 | 0.389 | -148.494 | 15.64 | 6.053 | 86.177 | 0.042 | 4.665 | 0.109 | -68.463 | 1.75 |
| 2.5 | 0.393 | -163.628 | 14.19 | 5.125 | 71.41 | 0.045 | 13.477 | 0.137 | -67.173 | 1.88 |
| 3 | 0.381 | 177.076 | 12.92 | 4.427 | 57.703 | 0.052 | 18.694 | 0.159 | -65.551 | 1.88 |
| 3.5 | 0.409 | 162.094 | 11.91 | 3.941 | 43.681 | 0.062 | 18.816 | 0.175 | -60.851 | 1.72 |
| 4 | 0.453 | 144.8 | 10.84 | 3.483 | 29.8 | 0.073 | 16.991 | 0.189 | -62.503 | 1.56 |
| 4.5 | 0.537 | 134.597 | 9.94 | 3.14 | 16.717 | 0.084 | 11.108 | 0.173 | -68.306 | 1.37 |
| 5 | 0.617 | 117.757 | 8.85 | 2.769 | 1.308 | 0.094 | 4.307 | 0.153 | -71.488 | 1.22 |
| 5.5 | 0.67 | 108.305 | 7.85 | 2.468 | -8.99 | 0.104 | -1.653 | 0.139 | -92.844 | 1.1 |
| 6 | 0.72 | 95.794 | 7.38 | 2.34 | -22.47 | 0.107 | -8.815 | 0.107 | -134.127 | 1 |
| 6.5 | 0.7 | 86.37 | 6.52 | 2.118 | -32.009 | 0.119 | -15.413 | 0.12 | 175.651 | 1.07 |
| 7 | 0.705 | 75.123 | 6.41 | 2.091 | -44.651 | 0.127 | -23.384 | 0.159 | 133.509 | 1.04 |
| 7.5 | 0.679 | 63.192 | 5.56 | 1.897 | -57.508 | 0.133 | -30.963 | 0.176 | 111.275 | 1.18 |
| 8 | 0.67 | 53.114 | 5.17 | 1.813 | -66.739 | 0.142 | -38.146 | 0.193 | 101.783 | 1.18 |
| 9 | 0.712 | 33.367 | 4.51 | 1.68 | -87.168 | 0.152 | -55.653 | 0.218 | 73.301 | 1.1 |
| 10 | 0.775 | 21.236 | 4.06 | 1.595 | -102.74 | 0.154 | -69.795 | 0.255 | 41.842 | 0.99 |

Typical Noise Parameters at 25°C,

$T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 5\text{V}$, $I_{ds} = 30\text{mA}$

| Freq GHz | F_{min} dB | Γ_{opt} Mag. | Γ_{opt} Ang. | $R_n/50$ | NF@50Ω dB |
|-------------|-----------------|------------------------|------------------------|----------|--------------|
| 0.5 | 0.77 | 0.12 | 64.1 | 0.13 | 0.8 |
| 1 | 0.62 | 0.04 | 123.1 | 0.09 | 0.62 |
| 1.5 | 0.72 | 0.05 | 151.4 | 0.08 | 0.72 |
| 2 | 0.84 | 0.07 | 120 | 0.09 | 0.84 |
| 2.5 | 0.87 | 0.09 | 158.2 | 0.09 | 0.88 |
| 3 | 0.9 | 0.13 | 178.1 | 0.09 | 0.92 |
| 3.5 | 0.96 | 0.15 | -164.5 | 0.09 | 1 |
| 4 | 1.07 | 0.19 | -154.2 | 0.1 | 1.14 |
| 4.5 | 1.14 | 0.24 | -144.3 | 0.11 | 1.26 |
| 5 | 1.22 | 0.28 | -132.8 | 0.12 | 1.38 |
| 5.5 | 1.27 | 0.31 | -122.6 | 0.14 | 1.5 |
| 6 | 1.37 | 0.34 | -112.9 | 0.17 | 1.65 |
| 6.5 | 1.43 | 0.39 | -101.4 | 0.22 | 1.83 |
| 7 | 1.49 | 0.43 | -92.7 | 0.27 | 1.99 |
| 7.5 | 1.65 | 0.47 | -81 | 0.36 | 2.29 |
| 8 | 1.77 | 0.5 | -69.6 | 0.48 | 2.56 |
| 8.5 | 1.91 | 0.56 | -59.6 | 0.63 | 2.96 |
| 9 | 2.01 | 0.59 | -48.6 | 0.81 | 3.27 |
| 9.5 | 1.92 | 0.69 | -43.2 | 1.01 | 3.68 |
| 10 | 2.06 | 0.68 | -36.2 | 1.25 | 4 |

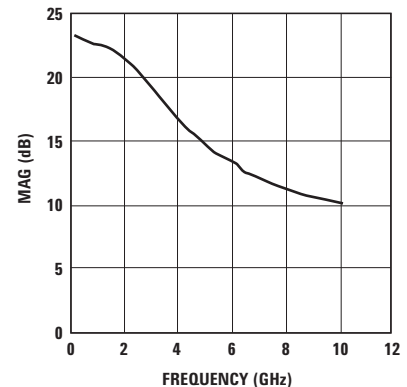


Figure 36. MAG vs. Frequency.

MGA-61563 Typical Scattering Parameters, $T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 5\text{V}$, $I_{ds} = 20\text{mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | S_{12} | | S_{22} | | K-factor |
|--------------|----------|----------|-------|----------|----------|----------|---------|----------|----------|----------|
| | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. | Mag. | Ang. | |
| 0.1 | 0.331 | -40.707 | 20.31 | 10.36 | 158.971 | 0.059 | 2.846 | 0.185 | -30.332 | 1.05 |
| 0.2 | 0.319 | -44.963 | 20.12 | 10.137 | 156.547 | 0.059 | 1.7 | 0.172 | -32.385 | 1.06 |
| 0.3 | 0.309 | -50.03 | 19.9 | 9.887 | 153.841 | 0.058 | 0.505 | 0.159 | -34.783 | 1.08 |
| 0.4 | 0.301 | -55.929 | 19.66 | 9.616 | 150.853 | 0.058 | -0.704 | 0.146 | -37.412 | 1.1 |
| 0.5 | 0.294 | -63.008 | 19.38 | 9.306 | 147.332 | 0.057 | -1.994 | 0.133 | -40.517 | 1.13 |
| 0.6 | 0.29 | -70.33 | 19.09 | 9.01 | 143.712 | 0.056 | -3.204 | 0.121 | -43.825 | 1.16 |
| 0.7 | 0.29 | -78.057 | 18.81 | 8.716 | 139.78 | 0.055 | -4.392 | 0.112 | -47.629 | 1.19 |
| 0.8 | 0.294 | -85.875 | 18.52 | 8.437 | 135.504 | 0.054 | -5.549 | 0.104 | -52.456 | 1.22 |
| 0.9 | 0.303 | -93.285 | 18.27 | 8.191 | 130.948 | 0.054 | -6.523 | 0.097 | -58.097 | 1.24 |
| 1 | 0.316 | -100.155 | 18.03 | 7.968 | 126.318 | 0.053 | -7.137 | 0.094 | -64.409 | 1.26 |
| 1.1 | 0.331 | -106.942 | 17.77 | 7.733 | 121.496 | 0.052 | -7.508 | 0.093 | -71.291 | 1.29 |
| 1.2 | 0.344 | -112.823 | 17.51 | 7.51 | 117.077 | 0.051 | -7.647 | 0.093 | -77.932 | 1.32 |
| 1.3 | 0.357 | -117.203 | 17.23 | 7.271 | 112.853 | 0.05 | -7.501 | 0.096 | -80.117 | 1.35 |
| 1.4 | 0.368 | -120.52 | 16.93 | 7.021 | 108.827 | 0.049 | -7.029 | 0.101 | -79.373 | 1.4 |
| 1.5 | 0.379 | -123.767 | 16.62 | 6.776 | 104.931 | 0.048 | -6.314 | 0.107 | -78.854 | 1.44 |
| 1.6 | 0.389 | -127.358 | 16.3 | 6.531 | 101.213 | 0.047 | -5.473 | 0.111 | -78.207 | 1.5 |
| 1.7 | 0.396 | -131.175 | 15.96 | 6.282 | 97.413 | 0.046 | -4.37 | 0.118 | -76.956 | 1.56 |
| 1.8 | 0.4 | -134.737 | 15.65 | 6.057 | 94.01 | 0.046 | -3.118 | 0.124 | -76.359 | 1.6 |
| 1.9 | 0.402 | -138.207 | 15.33 | 5.842 | 90.761 | 0.045 | -1.695 | 0.13 | -76.042 | 1.67 |
| 2 | 0.402 | -141.477 | 15.03 | 5.641 | 87.643 | 0.045 | -0.143 | 0.135 | -75.885 | 1.72 |
| 2.5 | 0.404 | -157.085 | 13.63 | 4.804 | 72.875 | 0.047 | 8.011 | 0.153 | -74.696 | 1.88 |
| 3 | 0.389 | -176.871 | 12.4 | 4.169 | 58.96 | 0.053 | 13.668 | 0.169 | -72.122 | 1.92 |
| 3.5 | 0.417 | 167.303 | 11.41 | 3.718 | 44.745 | 0.062 | 14.795 | 0.178 | -67.081 | 1.79 |
| 4 | 0.458 | 148.948 | 10.34 | 3.29 | 30.571 | 0.072 | 13.936 | 0.188 | -67.525 | 1.66 |
| 4.5 | 0.541 | 137.725 | 9.43 | 2.963 | 17.214 | 0.083 | 8.672 | 0.17 | -73.406 | 1.45 |
| 5 | 0.619 | 120.137 | 8.36 | 2.618 | 1.451 | 0.092 | 2.399 | 0.149 | -75.625 | 1.3 |
| 5.5 | 0.672 | 110.331 | 7.35 | 2.33 | -9.183 | 0.102 | -3.087 | 0.139 | -97.024 | 1.17 |
| 6 | 0.722 | 97.526 | 7.02 | 2.243 | -22.946 | 0.106 | -10.004 | 0.113 | -138.094 | 1.03 |
| 6.5 | 0.701 | 87.871 | 6.05 | 2.006 | -32.817 | 0.118 | -16.47 | 0.13 | 175.134 | 1.11 |
| 7 | 0.705 | 76.467 | 5.95 | 1.983 | -45.703 | 0.126 | -24.412 | 0.169 | 134.908 | 1.08 |
| 7.5 | 0.678 | 64.317 | 5.12 | 1.803 | -58.887 | 0.131 | -31.864 | 0.184 | 112.812 | 1.23 |
| 8 | 0.667 | 54.179 | 4.75 | 1.728 | -68.247 | 0.141 | -38.968 | 0.199 | 103.027 | 1.23 |
| 9 | 0.71 | 34.216 | 4.16 | 1.614 | -88.806 | 0.151 | -56.487 | 0.221 | 74.675 | 1.13 |
| 10 | 0.776 | 21.827 | 3.75 | 1.54 | -104.552 | 0.152 | -70.39 | 0.257 | 43.118 | 1.01 |

Typical Noise Parameters at 25°C,

$T_c = 25^\circ\text{C}$, $Z_0 = 50\Omega$, $V_d = 5\text{V}$, $I_{ds} = 20\text{mA}$

| Freq GHz | F_{min} dB | Γ_{opt} Mag. | Γ_{opt} Ang. | $R_n/50$ | NF@50Ω dB |
|-------------|-----------------|------------------------|------------------------|----------|--------------|
| 0.5 | 0.8 | 0.12 | 71.2 | 0.13 | 0.83 |
| 1 | 0.64 | 0.04 | 103.7 | 0.09 | 0.64 |
| 1.5 | 0.74 | 0.05 | 128.4 | 0.09 | 0.74 |
| 2 | 0.84 | 0.08 | 107.3 | 0.1 | 0.85 |
| 2.5 | 0.88 | 0.1 | 143.3 | 0.09 | 0.89 |
| 3 | 0.91 | 0.13 | 167.4 | 0.09 | 0.93 |
| 3.5 | 0.95 | 0.15 | -173.7 | 0.09 | 0.99 |
| 4 | 1.04 | 0.19 | -160.6 | 0.09 | 1.11 |
| 4.5 | 1.12 | 0.23 | -148.9 | 0.1 | 1.23 |
| 5 | 1.19 | 0.27 | -137 | 0.11 | 1.34 |
| 5.5 | 1.26 | 0.3 | -126.7 | 0.13 | 1.47 |
| 6 | 1.34 | 0.32 | -116.7 | 0.16 | 1.6 |
| 6.5 | 1.43 | 0.37 | -104.8 | 0.21 | 1.79 |
| 7 | 1.48 | 0.4 | -95.8 | 0.25 | 1.92 |
| 7.5 | 1.65 | 0.45 | -84.2 | 0.33 | 2.22 |
| 8 | 1.72 | 0.48 | -72.6 | 0.44 | 2.44 |
| 8.5 | 1.87 | 0.55 | -61.5 | 0.59 | 2.85 |
| 9 | 1.99 | 0.58 | -50 | 0.76 | 3.16 |
| 9.5 | 1.94 | 0.66 | -44.5 | 0.95 | 3.54 |
| 10 | 1.99 | 0.68 | -37.7 | 1.16 | 3.84 |

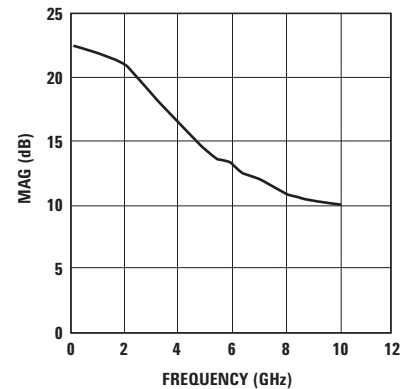


Figure 37. MAG vs. Frequency.

Refer to Agilent's Web Site for
S-parameters at different biases.
www.agilent.com/view/rf


Device Models
Refer to Agilent's Web Site
www.agilent.com/view/rf

Ordering Information

| Part Number | No. of Devices | Container |
|----------------|----------------|----------------|
| MGA-61563-TR1 | 3000 | 7" Reel |
| MGA-61563-TR2 | 10000 | 13" Reel |
| MGA-61563-BLK | 100 | antistatic bag |
| MGA-61563-TR1G | 3000 | 7" Reel |
| MGA-61563-TR2G | 10000 | 13" Reel |
| MGA-61563-BLKG | 100 | antistatic bag |


Note: For lead-free option, the part number will include the letter "G" at the end.

SOT-363/SC-70 (JEDEC DFP-N) Package Dimensions

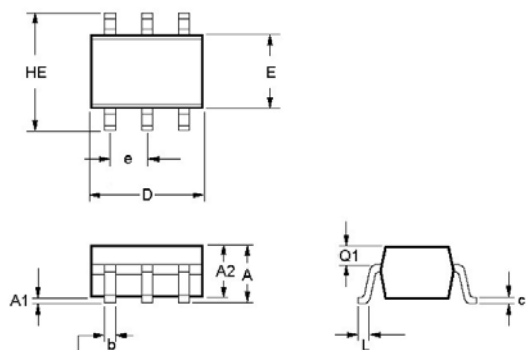



| Symbol | Dimensions | |
|--------|------------|-----------|
| | Min (mm) | Max (mm) |
| E | 1.15 | 1.35 |
| D | 1.80 | 2.25 |
| HE | 1.80 | 2.40 |
| A | 0.80 | 1.10 |
| A2 | 0.80 | 1.00 |
| A1 | 0.00 | 0.10 |
| e | 0.650 BCS | 0.650 BCS |
| b | 0.15 | 0.30 |
| c | 0.10 | 0.20 |
| L | 0.10 | 0.30 |

Recommended PCB Pad Layout for Agilent's SC70 6L/SOT-363 Products

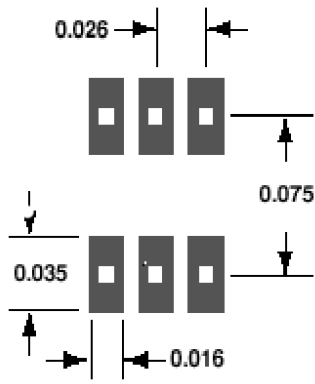


(dimensions in inches)

Device Orientation

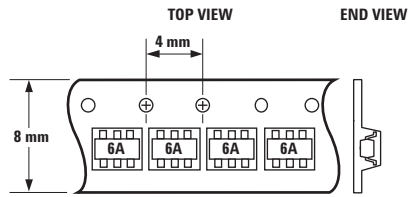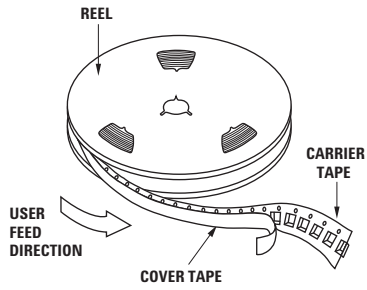

(Package marking example orientation shown.)

Tape Dimensions

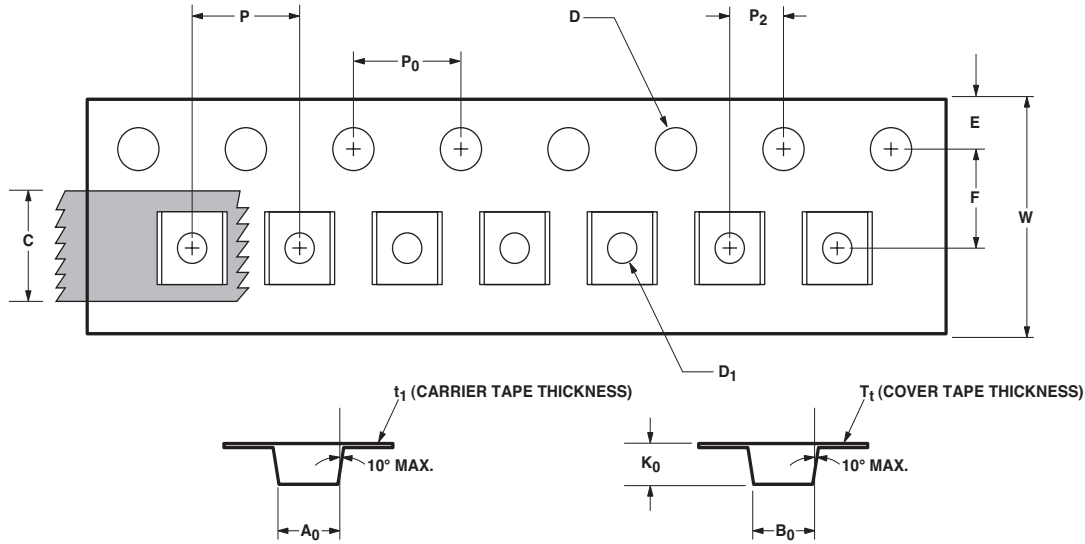

| | DESCRIPTION | SYMBOL | SIZE (mm) | SIZE (INCHES) |
|--------------|--|--------|------------------------|----------------------|
| CAVITY | LENGTH | A_0 | 2.40 ± 0.10 | 0.094 ± 0.004 |
| | WIDTH | B_0 | 2.40 ± 0.10 | 0.094 ± 0.004 |
| | DEPTH | K_0 | 1.20 ± 0.10 | 0.047 ± 0.004 |
| | PITCH | P | 4.00 ± 0.10 | 0.157 ± 0.004 |
| | BOTTOM HOLE DIAMETER | D_1 | $1.00 + 0.25$ | $0.039 + 0.010$ |
| PERFORATION | DIAMETER | D | 1.50 ± 0.10 | 0.061 ± 0.002 |
| | PITCH | P_0 | 4.00 ± 0.10 | 0.157 ± 0.004 |
| | POSITION | E | 1.75 ± 0.10 | 0.069 ± 0.004 |
| CARRIER TAPE | WIDTH | W | $8.00 \pm 0.30 - 0.10$ | 0.315 ± 0.012 |
| | THICKNESS | t_1 | 0.254 ± 0.02 | 0.010 ± 0.0005 |
| COVER TAPE | WIDTH | C | 5.40 ± 0.10 | 0.205 ± 0.004 |
| | TAPE THICKNESS | T_t | 0.062 ± 0.001 | 0.0025 ± 0.00004 |
| DISTANCE | CAVITY TO PERFORATION (WIDTH DIRECTION) | F | 3.50 ± 0.05 | 0.138 ± 0.002 |
| | CAVITY TO PERFORATION (LENGTH DIRECTION) | P_2 | 2.00 ± 0.05 | 0.079 ± 0.002 |

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or (916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (65) 6756 2394

India, Australia, New Zealand: (65) 6755 1939

Japan: (+81 3) 3335-8152(Domestic/International), or 0120-61-1280(Domestic Only)

Korea: (65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines, Indonesia: (65) 6755 2044

Taiwan: (65) 6755 1843

Data subject to change.

Copyright © 2004 Agilent Technologies, Inc.

Obsoletes 5988-9855EN

November 17, 2004

5989-1811EN



Agilent Technologies