

ATC 100 C Series Porcelain High RF Power Multilayer Capacitors

- Case C Size (.250" x .250")
- High Q
- Low ESR/ESL
- High RF Power
- Available with Encapsulation Option*
- Capacitance Range 1 pF to 2700 pF
- Ultra-Stable Performance
- High RF Current/Voltage
- High Reliability

ATC, the industry leader, offers new improved ESR/ESL performance for the 100 C Series RF Capacitors. This high Q multilayer capacitor is ultra-stable under high RF current and voltage applications. High density Porcelain construction provides a rugged, hermetic package.

ATC offers an encapsulation option for applications requiring extended protection against arc-over and corona.

Typical functional applications: Bypass, Coupling, Tuning, Impedance Matching and DC Blocking.

Typical circuit applications: VHF/UHF RF Power Amplifiers, Antenna Tuning, Plasma Chambers and Medical (MRI coils).

*For leaded styles only.

ENVIRONMENTAL TESTS

ATC 100 C Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:

MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:


MIL-STD-202, Method 108, for 2000 hours, at 125°C.

Voltage applied.

1 pF to 470 pF: at WVDC

510 pF to 1200 pF: at 120% of WVDC

1500 pF to 2700 pF: at 200% of WVDC

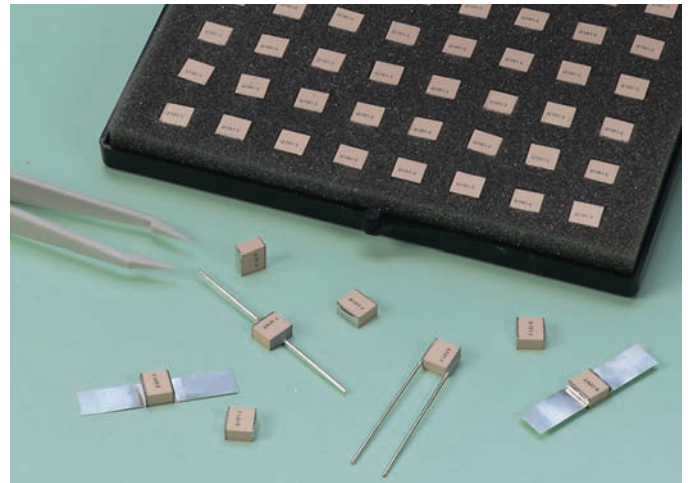

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q):

Greater than 10,000 (1.0 pF to 1000 pF) @ 1 MHz.
Greater than 10,000 (1100 pF to 2700 pF) @ 1 KHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

+90 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

1 pF to 2700 pF:

10⁵ Megohms min. @ +25°C at rated WVDC.

10⁴ Megohms min. @ +125°C at rated WVDC.

Max. test voltage is 500 VDC.

WORKING VOLTAGE (WVDC): See Capacitance Values Table, p 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV): *See page 2.

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None

(No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

TERMINATION STYLES:

Available in various surface mount and leaded styles.

See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 10 lbs. min., 20 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN TECHNICAL CERAMICS

ATC North America
631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318
sales@atceramics-asia.com

 THE
ENGINEERS'
CHOICE™
ISO 9001 REGISTERED

www.atceramics.com

ATC # 001-808 Rev. I 1/07

ATC 100 C Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC
1R0	1.0	B, C, D	2500	5R1	5.1	B, C, D	2500	390	39	F, G, J K, M	2500	301	300	F, G, J K, M	1500
1R1	1.1			5R6	5.6			430	43			331	330		
1R2	1.2			6R2	6.2			470	47			361	360		
1R3	1.3			6R8	6.8			510	51			391	390		
1R4	1.4			7R5	7.5			560	56			431	430		
1R5	1.5			8R2	8.2			620	62			471	470		
1R6	1.6			9R1	9.1			680	68			511	510		
1R7	1.7			100	10			750	75			561	560		
1R8	1.8			110	11			820	82			621	620		
1R9	1.9			120	12			910	91			681	680		
2R0	2.0	B, C, D	2500	130	13	F, G, J K, M	2500	101	100	F, G, J K, M	2500	751	750	F, G, J K, M	1000
2R1	2.1			150	15			111	110			821	820		
2R2	2.2			160	16			121	120			911	910		
2R4	2.4			180	18			131	130			102	1000		
2R7	2.7			200	20			151	150			112	1100		
3R0	3.0			220	22			161	160			122	1200		
3R3	3.3			240	24			181	180			152	1500		
3R6	3.6			270	27			201	200			182	1800		
3R9	3.9			300	30			221	220			222	2200		
4R3	4.3			330	33			241	240			272	2700		
4R7	4.7	360	36	271	270										

$VRMS = 0.707 \times WVDC$


• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. • ENCAPSULATION OPTION AVAILABLE. PLEASE CONSULT FACTORY.

* DWV: 1 pF to 470 pF: 120% of rated WVDC for 5 secs. 510 pF to 1200 pF: 150% of rated WVDC for 5 secs. 1500 pF to 2700 pF: 250% of rated WVDC for 5 secs.

CAPACITANCE TOLERANCE

Code	B	C	D	F	G	J	K	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

ATC PART NUMBER CODE

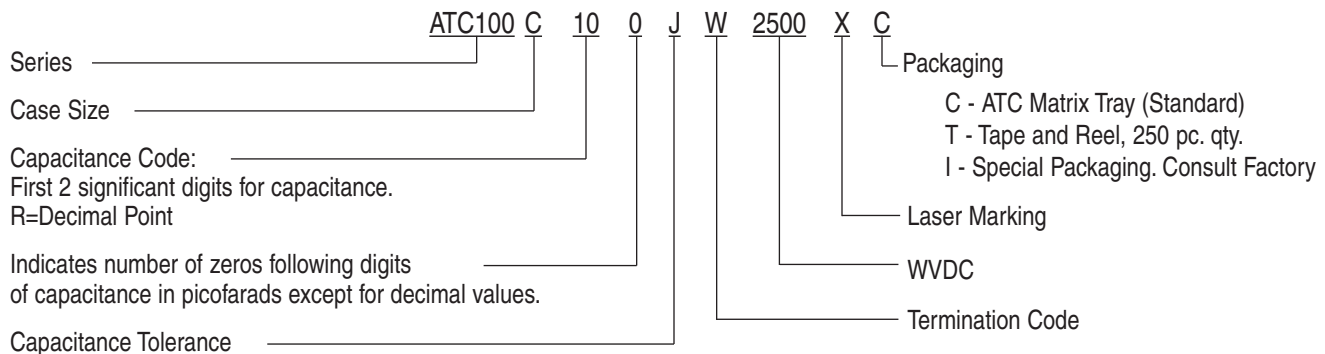

The above part number refers to a 100 C Series (case size C) 10 pF capacitor, J tolerance (±5%), 2500 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and ATC Waffle-packaging.

ATC accepts orders for our parts using designations *with* or *without* the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (631) 622-4700.

Consult factory for additional performance data.










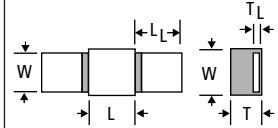

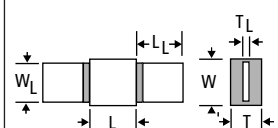

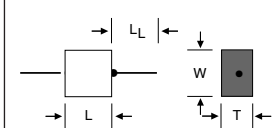

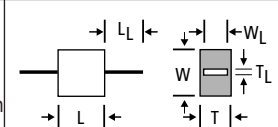

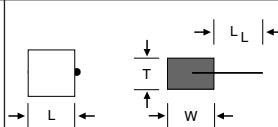
A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318 • sales@atceramics-asia.com

ATC 100 C Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (MM)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
100C	W	 Solder Plate		.230 +0.020 -.010 (5.84 +0.51 -0.25)			.040 (1.02) max.	Tin/Lead, Solder Plated over Nickel Barrier Termination
100C	P	 Pellet		.230 +0.025 -.010 (5.84 +0.64 -0.25)				Heavy Tin/Lead Coated, over Nickel Barrier Termination
100C	T	 Solderable Nickel Barrier		.230 +0.020 -.010 (5.84 +0.51 -0.25)				RoHS Compliant Tin Plated over Nickel Barrier Termination
100C	CA	 Gold Chip		.230 +0.020 -.010 (5.84 +0.51 -0.25)				RoHS Compliant Gold Plated over Nickel Barrier Termination
100C	MS	 Microstrip			.250 ±0.015 (6.35 ±0.38)			High Purity Silver Leads $L_L = .500$ (12.7) min. $W_L = .240 \pm 0.005$ (6.10 ±.127) $T_L = .004 \pm 0.001$ (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	AR	 Axial Ribbon						High Purity Silver Leads $L_L = .500$ (12.7) min. $W_L = .240 \pm 0.005$ (6.10 ±.127) $T_L = .004 \pm 0.001$ (.102 ±.025) Leads are Attached with High Temperature Solder.
100C	AW	 Axial Wire						Silver-plated Copper Leads $L_L = 2.25$ (57.15) min. Dia. = .032 ±.002 (0.81 ±0.05)
100C	VA	 Vertical Axial Ribbon						Silver Leads $L_L = .500$ (12.7) min. $W_L = **$ See below $T_L = .004 \pm 0.001$ (.102 ±.025)
100C	RW	 Radial Wire		Silver-plated Copper Leads $L_L = 1.0$ (25.4) min. Dia. = .032 ±.002 (0.81 ±0.05)				

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.
 ** $W_L = .110$ (2.79) for capacitance values ≤ 680 pF; $W_L = .130$ (3.30) for capacitance values > 680 pF

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318 • sales@atceramics-asia.com

ATC 100 C Capacitors: Non-Magnetic Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
100C	WN	C Non-Mag Solder Plate		.230 +.025 -.010 (5.84 +.64 -.25)	.250 ±.015 (6.35 ±0.38)	.145 (3.68) max. for capacitance values ≤ 680 pF;	.040 (1.02) max.	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination
100C	PN	C Non-Mag Pellet		.230 +.035 -.010 (5.84 +.89 -.25)				Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination
100C	TN	C Non-Mag Solderable Barrier		.230 +.025 -.010 (5.84 +.64 -.25)				.165 (4.19) max. for capacitance values > 680 pF.
100C	MN	C Non-Mag Microstrip		.245 ±.025 (6.22 ±0.64)				High Purity Silver Leads L _L = .500 (12.7) min. W _L = .240 ±.005 (6.10 ±.127) T _L = .004 ±.001 (.102 ±.025) Leads are Attached with High Temperature Solder.

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

Suggested Mounting Pad Dimensions

Horizontal
Electrode Orientation

Vertical
Electrode Orientation

Case C Vertical Mount

Cap Value	Pad Size	A Min.	B Min.	C Min.	D Min.
< 680 pF	Normal	.150	.050	.200	.300
	High Density	.130	.030	.200	.260
> 680 pF	Normal	.185	.050	.200	.300
	High Density	.165	.030	.200	.260

Horizontal Mount

All values	Pad Size	A Min.	B Min.	C Min.	D Min.
All values	Normal	.280	.050	.200	.300
	High Density	.260	.030	.200	.260

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com


ATC Asia
+86-755-8366-4318 • sales@atceramics-asia.com

ATC 100 C Performance Data


ESR VS. CAPACITANCE
ATC SERIES 100, CASE C

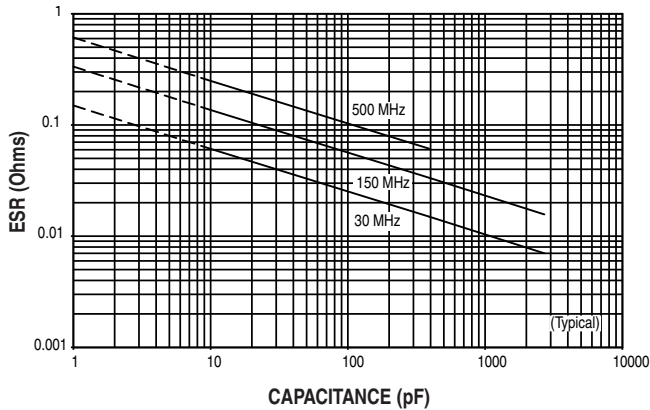


Q VS. CAPACITANCE
ATC SERIES 100, CASE C

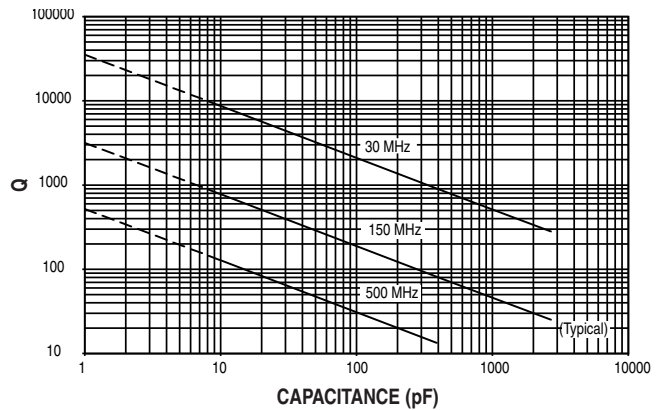


SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 100, CASE C

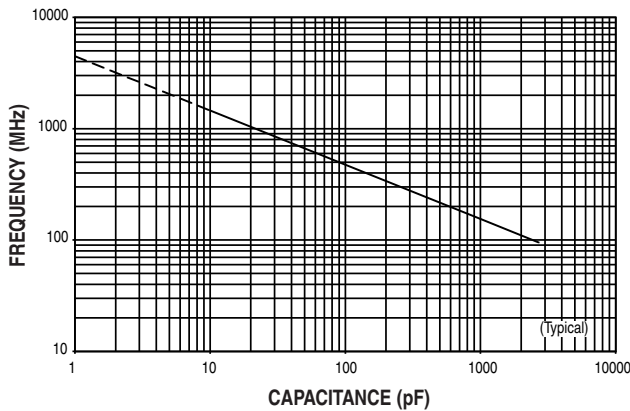

CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE C

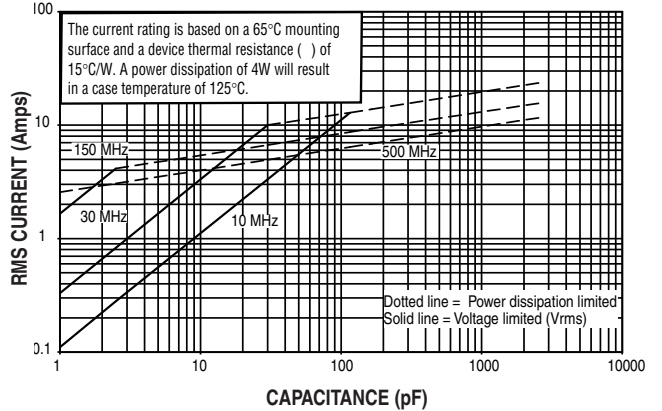

CAPACITANCE CHANGE VS. TEMPERATURE
ATC SERIES 100, CASE C

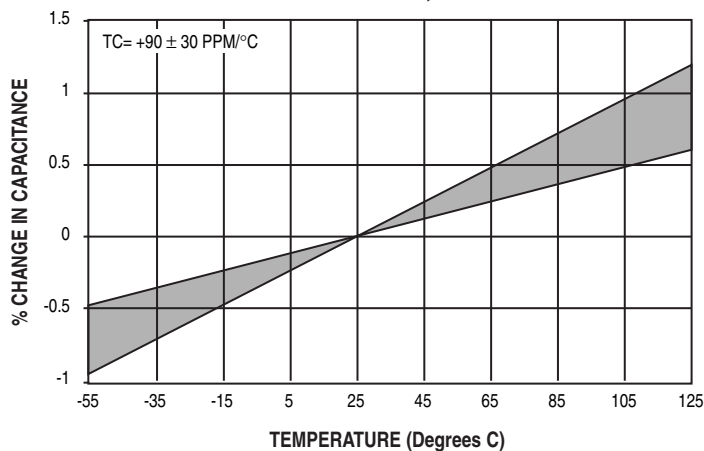

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700 • sales@atceramics.com

ATC Europe
+46 8 6800410 • sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318 • sales@atceramics-asia.com

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. A 10/03). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-808 Rev. I 1/07



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318
sales@atceramics-asia.com



www.atceramics.com