

ATC 600F Series Ultra-Low ESR, High Q, NPO RF & Microwave Capacitors

Features:

- **Lowest ESR in Class**
- Highest Working Voltage in class – 250V
- Standard EIA Size: 0805
- Laser Marking (Optional)
- High Self Resonance Frequencies

Applications:

- Cellular Base Station Equipment
- High Q Frequency Sources
- Broadband Wireless Services
- Satcom Equipment
- Point-to-Point/Point-to-MultiPoint Radio

Circuit Applications:

- Filter Networks
- Matching Networks
- Tuning, Coupling, Bypass and DC Blocking



ATC 600 SERIES OVERVIEW

ATC Series	ATC Case Size	EIA Case Size
600	L	0402
600	S	0603
600	F	0805

Electrical Specifications

Capacitance:	0.1 to 240 pF
Tolerances:	See Cap Value Chart
Working Voltage (WVDC):	250 V
Quality Factor (Q):	≥ 2000
Temperature coefficient of Capacitance (TCC):	0 ± 30 ppm/°C, -55°C to +125°C
Insulation Resistance:	10 ⁵ MΩ min. at +25°C at rated WVDC
	10 ⁴ MΩ min. at +125°C at rated WVDC
Dielectric Withstanding Voltage (DWV):	2.5 x WVDC for 5 seconds
Aging:	None

Mechanical Specifications

Terminations:	T = Tin Plated over Nickel Barrier* (Standard) W = Tin/Lead Solder Plated over Nickel Barrier
Solderability:	Solder coverage > 90% of end termination
Terminal Strength:	4 lbs. Typ., 2 lbs. min.

Environmental Specifications

Life Test:	2000 hours, +125°C at 2X WVDC
Thermal Shock:	5 cycles, -55°C to +125°C
Moisture Resistance:	240 hours, 85% Relative Humidity at +85°C

**Lead-Free and RoHS Compliant*

ATC 600 Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-8366-4318
sales@atceramics-asia.com

THE ENGINEERS' CHOICE™
ISO 9001 REGISTERED

ISO 9001
REGISTERED
COMPANY

www.atceramics.com

ATC # 001-956;
Rev E. 6/05

ATC 600F Series Ultra-Low ESR, High Q NPO RF & Microwave Capacitors

Capacitance Values*


Value (pF)	Cap Code	Marking	Tolerances
0.1	0R1	A9	A, B
0.2	0R2	H9	A, B
0.3	0R3	M9	A, B
0.4	0R4	d9	A, B
0.5	0R5	f9	A, B
0.6	0R6	m9	A, B
0.7	0R7	n9	A, B
0.8	0R8	t9	A, B
0.9	0R9	g9	A, B
1.0	1R0	A0	A, B
1.1	1R1	B0	A, B, C
1.2	1R2	C0	A, B, C
1.3	1R3	D0	A, B, C
1.5	1R5	E0	A, B, C
1.6	1R6	F0	A, B, C
1.8	1R8	G0	A, B, C
2.0	2R0	H0	A, B, C
2.2	2R2	J0	A, B, C
2.4	2R4	K0	A, B, C
2.7	2R7	L0	A, B, C
3.0	3R0	M0	A, B, C

Value (pF)	Cap Code	Marking	Tolerances
3.3	3R3	N0	A, B, C
3.6	3R6	P0	A, B, C
3.9	3R9	Q0	A, B, C
4.3	4R3	R0	A, B, C
4.7	4R7	S0	A, B, C
5.1	5R1	T0	A, B, C
5.6	5R6	U0	A, B, C
6.2	6R2	V0	A, B, C
6.8	6R8	W0	B, C, D
7.5	7R5	X0	B, C, D
8.2	8R2	Y0	B, C, D
9.1	9R1	Z0	B, C, D
10	100	A1	F, G, J
11	110	B1	F, G, J
12	120	C1	F, G, J
15	150	E1	F, G, J
18	180	G1	F, G, J
20	200	H1	F, G, J
22	220	J1	F, G, J
24	240	K1	F, G, J
27	270	L1	F, G, J

Value (pF)	Cap Code	Marking	Tolerances
30	300	M1	F, G, J
33	330	N1	F, G, J
36	360	P1	F, G, J
39	390	Q1	F, G, J
43	430	R1	F, G, J
47	470	S1	F, G, J
51	510	T1	F, G, J
56	560	U1	F, G, J
62	620	V1	F, G, J
68	680	W1	F, G, J
75	750	X1	F, G, J
82	820	Y1	F, G, J
91	910	Z1	F, G, J
100	101	A2	F, G, J
110	111	B2	F, G, J
120	121	C2	F, G, J
150	151	E2	F, G, J
180	181	G2	F, G, J
200	201	H2	F, G, J
220	221	J2	F, G, J
240	241	K2	F, G, J

*Non-standard values and custom tolerances are available upon request.

ATC Part Number Code

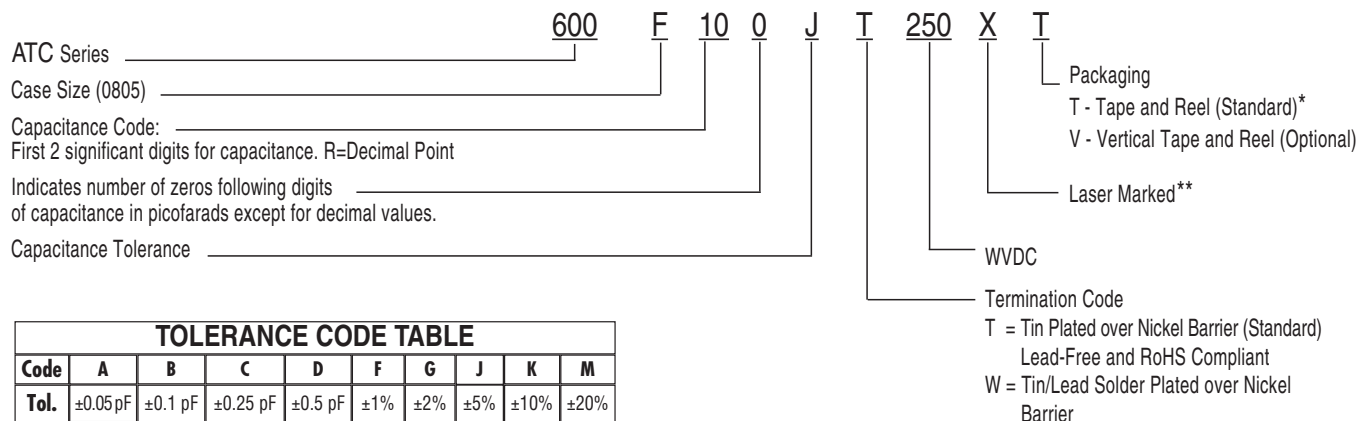

TOLERANCE CODE TABLE

Code	A	B	C	D	F	G	J	K	M
Tol.	±0.05 pF	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

*4,000 pieces on 7" reel and 500 pieces on prototype reel. Consult ATC for other options.

The above part number refers to a 600F Series (case size F) 10 pF capacitor, J tolerance (±5%), 250 WVDC, with T termination (Tin Plated over Nickel Barrier Lead-Free and RoHS Compliant), Laser Marking and Tape and Reel packaging.

**Marking is optional.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (631) 622-4700.

Consult factory for 500 piece reels for prototyping.

Consult factory for additional performance data.

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
631-622-4700 sales@atceramics.com

ATC Europe
+46 8 6800410 sales@atceramics-europe.com


ATC Asia
86-755-8366-4318 sales@atceramics-asia.com

ATC 600F Series Ultra-Low ESR, High Q NPO RF & Microwave Capacitors

600 F ESR vs Frequency

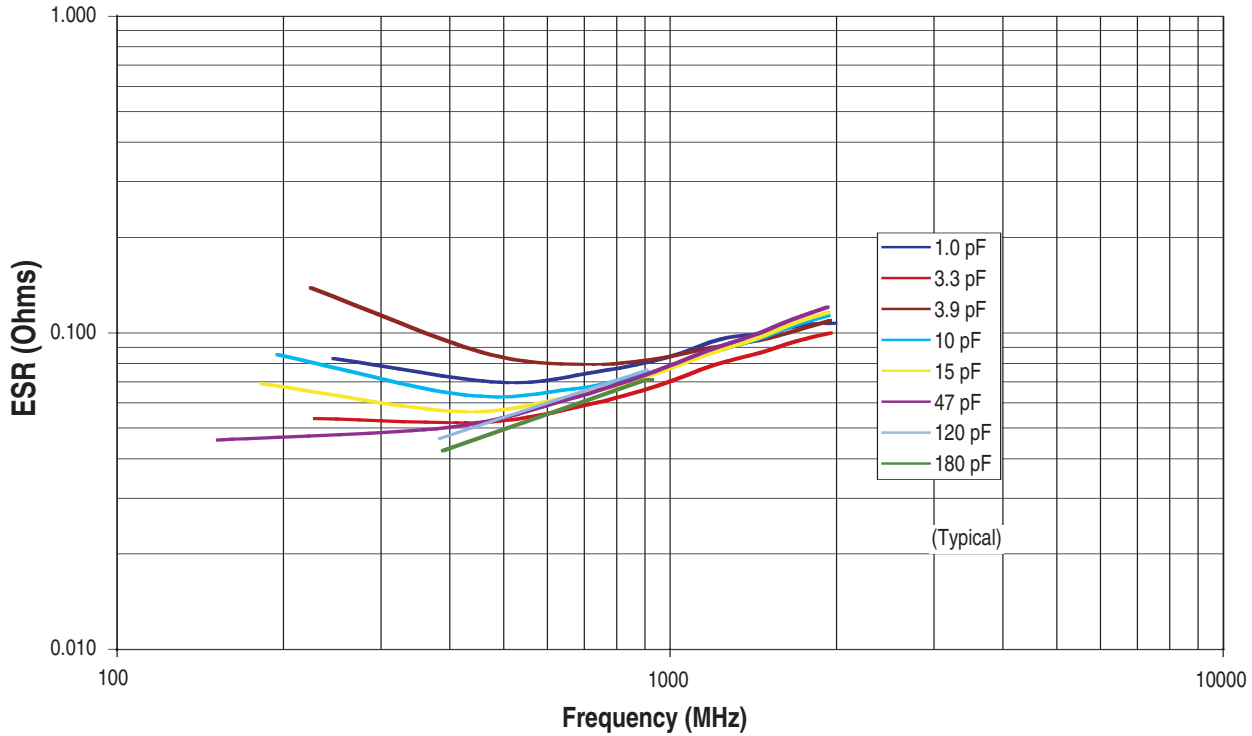

600 F Resonance Frequency Data

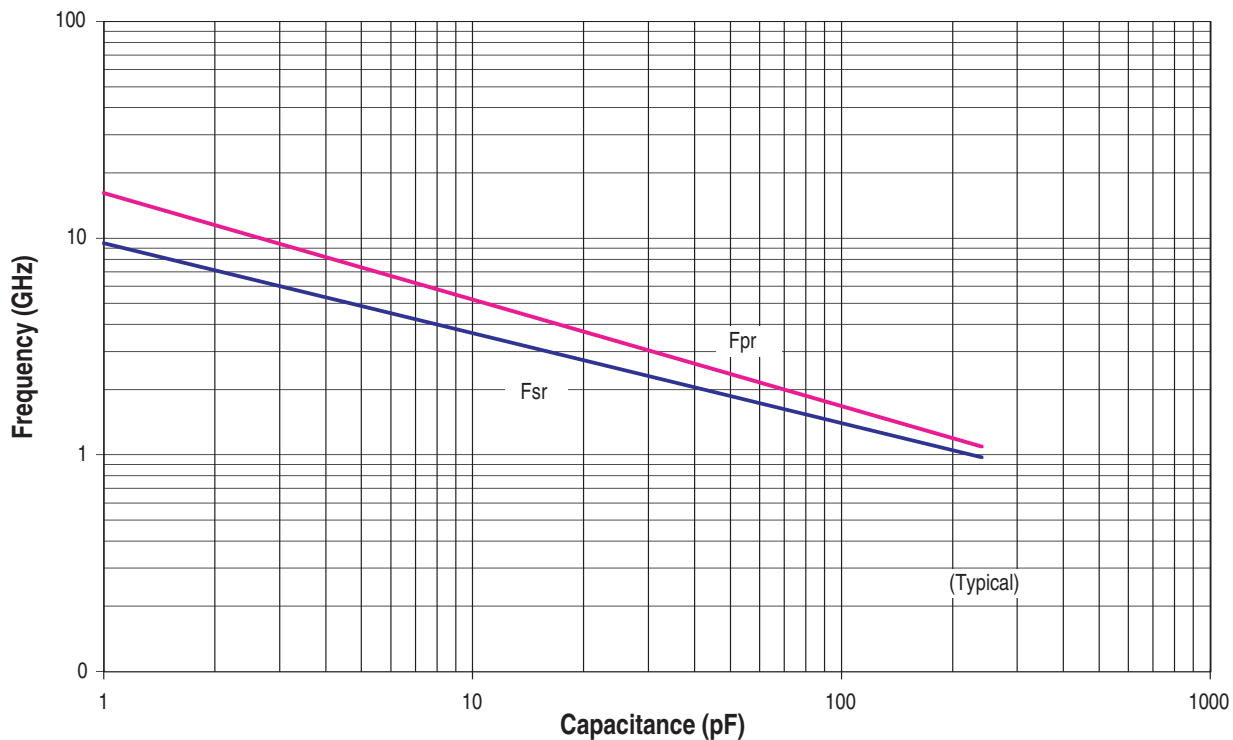

ATC 600F Series Data Sheet Test Condition Description

Capacitors horizontally mounted on 23.3-mil thick Rogers RO4350[®] softboard, 52-mil wide, 1/2 oz. Cu traces.

FSR = lowest frequency at which S11 response, referenced at capacitor edge, crosses real axis on Smith Chart.

FPR = lowest frequency at which there is a notch in S21 magnitude response.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700 sales@atceramics.com

ATC Europe
+46 8 6800410 sales@atceramics-europe.com

ATC Asia
86-755-8366-4318 sales@atceramics-asia.com

ATC 600F Series Ultra-Low ESR, High Q NPO RF & Microwave Capacitors

Outline Dimensions

	F (0805) L: $.079 \pm .008$ (2.00 ± 0.20) W: $.049 \pm .008$ (1.25 ± 0.20)	T: $.051$ max. (1.30 max.) Y: $.020 \pm 0.01$ (0.50 ± 0.25)

Suggested Mounting Pad Dimensions

	Case Sizes L, S and F																							
	<table border="1"> <thead> <tr> <th>Case Size</th> <th>A Min</th> <th>B Min</th> <th>C Min</th> <th>D Min</th> </tr> </thead> <tbody> <tr> <td>0402 (1005)</td> <td>.0275 (0.70)</td> <td>.0354 (0.90)</td> <td>.0157 (0.40)</td> <td>.0866 (2.20)</td> </tr> <tr> <td>0603 (1608)</td> <td>.0393 (1.00)</td> <td>.0433 (1.10)</td> <td>.0236 (0.60)</td> <td>.110 (2.80)</td> </tr> <tr> <td>0805 (2012)</td> <td>.0590 (1.50)</td> <td>.0512 (1.30)</td> <td>.0236 (0.60)</td> <td>.1259 (3.20)</td> </tr> </tbody> </table>	Case Size	A Min	B Min	C Min	D Min	0402 (1005)	.0275 (0.70)	.0354 (0.90)	.0157 (0.40)	.0866 (2.20)	0603 (1608)	.0393 (1.00)	.0433 (1.10)	.0236 (0.60)	.110 (2.80)	0805 (2012)	.0590 (1.50)	.0512 (1.30)	.0236 (0.60)	.1259 (3.20)	inches (mm)		
Case Size	A Min	B Min	C Min	D Min																				
0402 (1005)	.0275 (0.70)	.0354 (0.90)	.0157 (0.40)	.0866 (2.20)																				
0603 (1608)	.0393 (1.00)	.0433 (1.10)	.0236 (0.60)	.110 (2.80)																				
0805 (2012)	.0590 (1.50)	.0512 (1.30)	.0236 (0.60)	.1259 (3.20)																				

Design Kits Each Kit contains a selection of standard capacitor values for circuit prototyping.

Kit #	Item #	Description	Cap. Value Range (pF)	Cap. Values (pF)	Tol. (pF)	Price
Kit 32	DK0032	600F Series Ultra-low ESR, High Q Microwave Capacitors 16 different values, 15 pcs. min. per value	0.1 to 2.0	0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0, 1.1, 1.2, 1.5	± 0.1	\$90.00
				1.6, 1.8, 2.0	± 0.25	
Kit 33	DK0033	600F Series Ultra-low ESR, High Q Microwave Capacitors 16 different values, 15 pcs. min. per value	1.0 to 10	1.0, 1.2, 1.5, 1.8, 2.0, 2.2, 2.4, 2.7, 3.0, 3.3	± 0.1	\$90.00
				3.9, 4.7, 5.6, 6.8, 8.2	± 0.25	
				10	$\pm 5\%$	
Kit 34	DK0034	600F Series Ultra-low ESR, High Q Microwave Capacitors 16 different values, 15 pcs. min. per value	10 to 100	10, 12, 15, 18, 20, 22, 24, 27, 30, 33, 39, 47, 56, 68, 82, 100	$\pm 5\%$	\$90.00
Kit 35	DK0035	600F Series Ultra-low ESR, High Q Microwave Capacitors 7 different values, 15 pcs. min. per value	100 to 240	100, 120, 150, 180, 200, 220, 240	$\pm 5\%$	\$50.00

For Online Kit Orders, Catalog & Application Notes, Visit: www.atceramics.com

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. A 10/03). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product line without prior notice.

© 2002 American Technical Ceramics Corp. All Rights Reserved.

ATC 001-956 Rev. E; 6/05

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
631-622-4700 sales@atceramics.com

ATC Europe
+46 8 6800410 sales@atceramics-europe.com

ATC Asia
86-755-8366-4318 sales@atceramics-asia.com

w w w . a t c e r a m i c s . c o m