
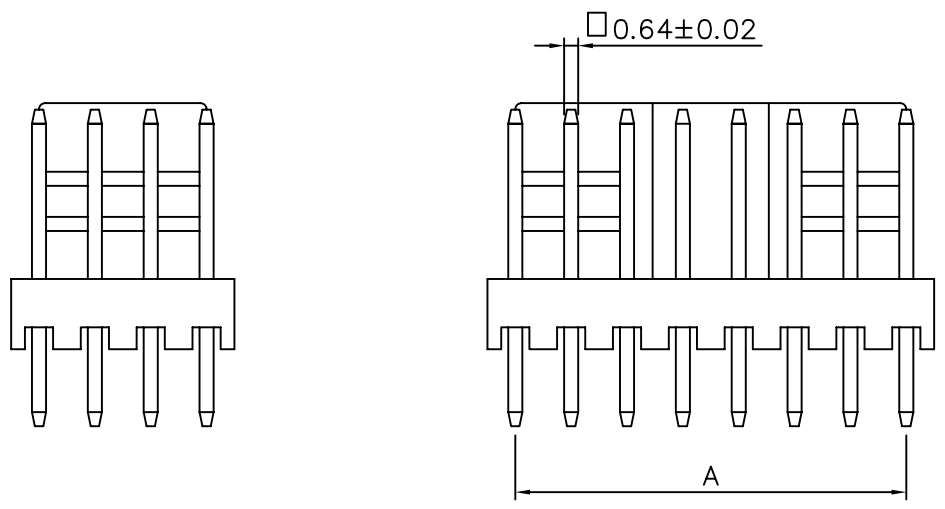



SPECIFICATIONS

Current Rating:2A AC,DC
 Voltage Rating:250 AC Max.
 Operating Temp:-25°C~+85°C
 Contact Resistance:10 Milliohms Max.
 Insulating Resistance:1000 Megohms Min.
 Terminal Material:Brass/Tin-Plated/Gold-Plated
 Material:Nylon66,UL94V-2

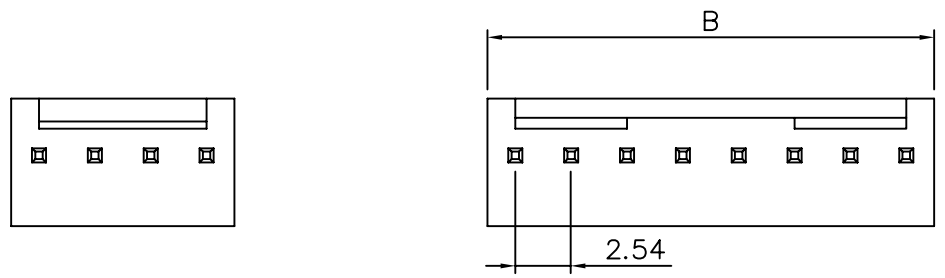

(2 Through 5 Circuits)

(6 Through 20 Circuits)

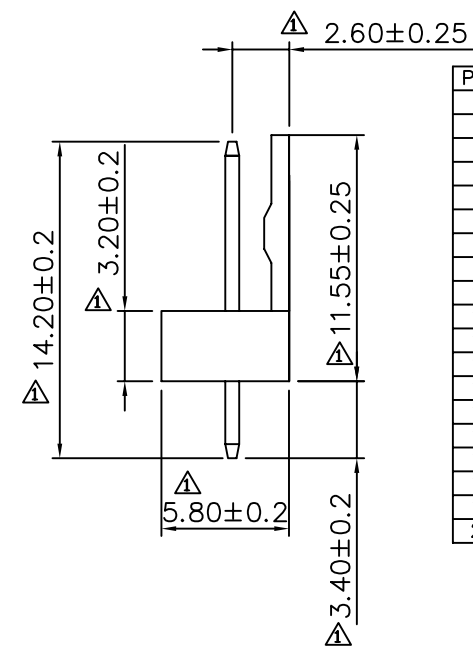

Poles	Dim A	Dim B
2	2.54	5.12
3	5.08	7.66
4	7.62	10.20
5	10.16	12.74
6	12.70	15.30
7	15.24	17.94
8	17.78	20.48
9	20.32	23.02
10	22.86	25.58
11	25.40	28.12
12	27.94	30.68
13	30.48	33.10
14	33.02	35.80
15	35.56	38.34
16	38.10	40.94
17	40.64	43.30
18	43.18	45.90
19	45.72	48.56
20	48.26	50.80