





MODEL NO. 3266

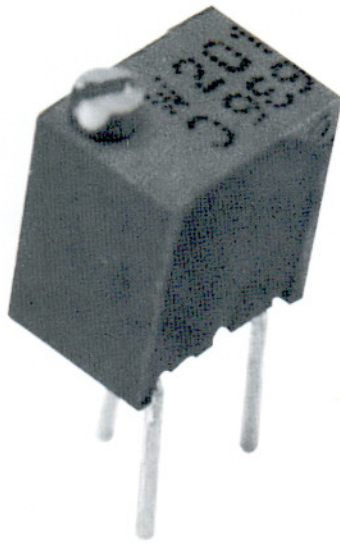

FEATURES :

- 1/4" Square Shape
- Cermet/ Industrial/ Sealed
- Multiturn & Vertical Adjust Type Available


HOW TO ORDER

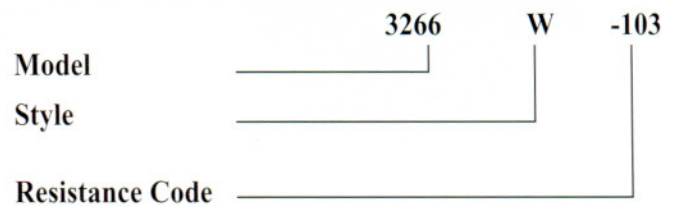

Standard Resistance Table

Resistance (Ω)	Resistance Code
50	500
100	101
200	201
500	501
1,000	102
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105

OUTLINE DRAWING & DIMENSIONS (mm)

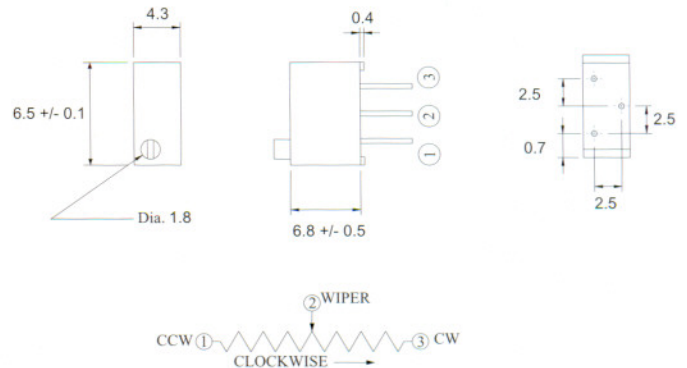

Electrical Characteristics

Power Rating0.25W @ 70 °C 0W @ 125 °C
Resistance Range50 Ω ~ 1M Ω
Insulation Resistance1G Ω
Contact Resistance Variation3% or 3 Ω
End Resistance1% or 2 Ω
Max. Operating Voltage300V _{AC}

Mechanical Characteristics

Effective Electrical Travel (Turns)12
Rotational Torque \leq 35mNm

Environmental Characteristics

Operating Temperature Range-55 °C ~ +125 °C
Temperature Coefficient \pm 100ppm/ °C