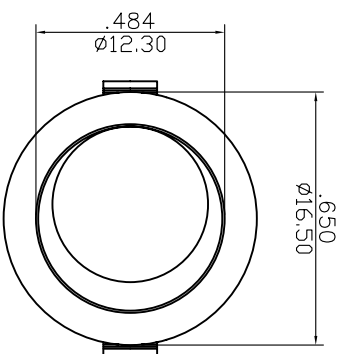
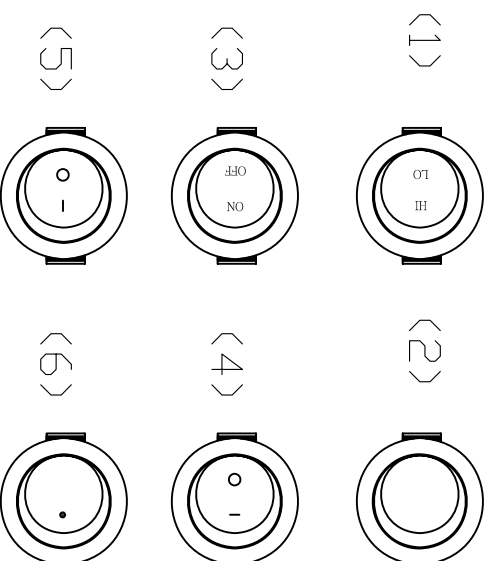
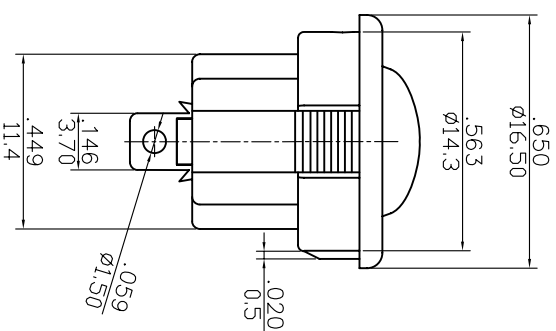
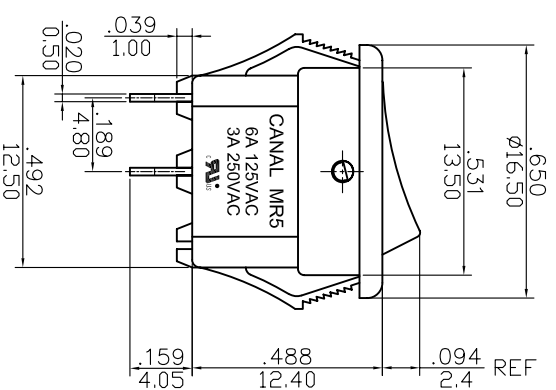
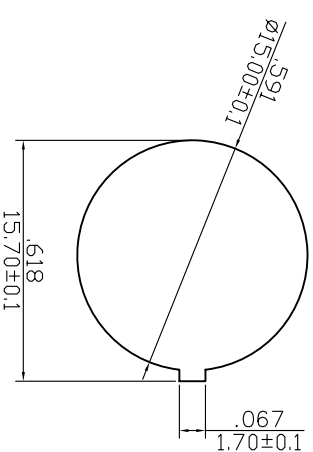

$$\text{ON}-\text{OFF}$$

ROCKER SWITCH MODEL MR5 SERIES
RATING: 3A 250VAC (UL, CUL)
6A 125VAC (UL, CUL)
3A 250VAC~ μ T100 (VDE)
DIELECTRIC VOLTAGE-WITHSTAND: 1,000VAC FOR 1 MINUTE
INSULATION RESISTANCE: DC 500V 100M Ω (MIN.)
CONTACT RESISTANCE: 20m Ω INITIAL (MAX.)
OPERATION: 400 $\pm$ 100 GRAM.



PANEL CUTOUT DIMENSION


$$\frac{X=(1.0 \sim 2.0 \text{ mm})}{\text{PANEL THICKNESS}}$$

SCALE:1:1

NOTE: 1. TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm \frac{0.02}{0.3}$ (in./mm)

2. IT IS IN ACCORD WITH CANAL SPECIFICATION: WI-QA-24

REVISION	DESCRIPTION	REVISED BY	TOLERANCES, X ± .XX ± ANGLE $\frac{1}{2}$		$\oplus$		UNIT	mm	PART NAME	MR5 SPEC DRAWING	DWG NO
∇			DRAWN BY	蔡劍	DESIGNED BY	蔡劍	SCALE	2/1			
∇			CHECKED BY		APPROVED BY		DATE	2005.08.08	PART NO		
∇											
∇	2005.10.27 首次出圖。	蔡劍							MR5-110-R*N-****		
										S0988A	