
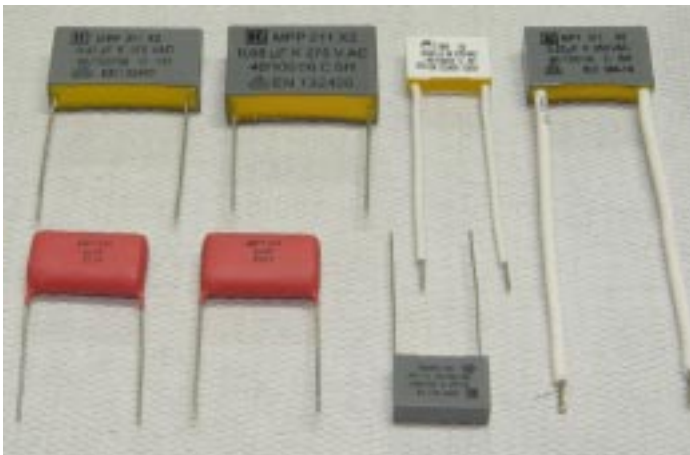


CONIS COMPANY Ltd.
CAPACITORS
EMI and RFI FILTERS

PLASTIC FILM CAPACITORS

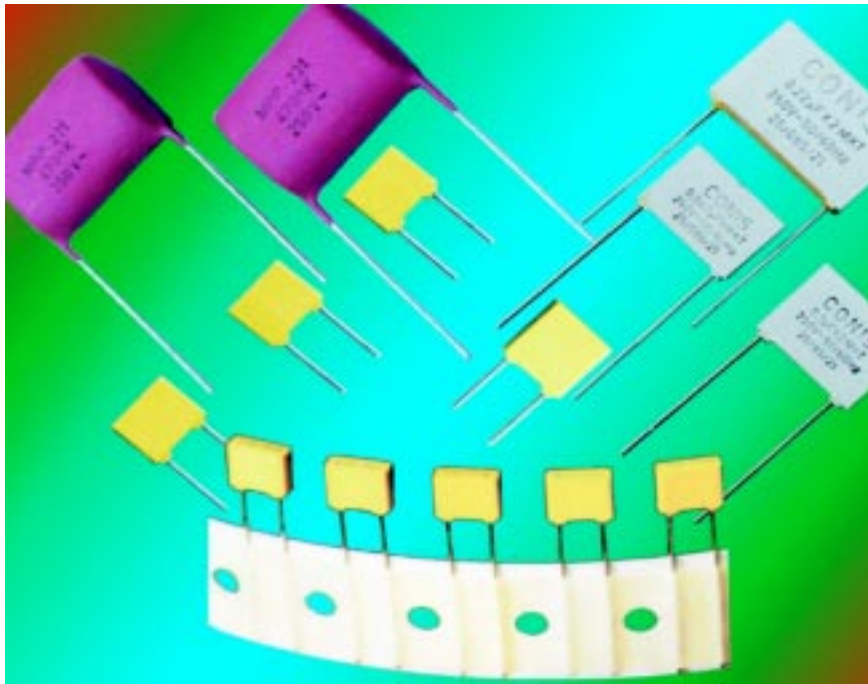

Head office and factory address:

342 "Tzar Osvoboditel", 2500 Kyustendil, Bulgaria

Tel.: +359 78/26030 - General manager Fax: +359 78/51312

+359 78/26326 - External sales +359 78/51373 - Internal sales

E-mail: info@conis-bg.com

web site: www.conis-bg.com



PLASTIC FILM CAPACITORS

CONTENTS

I. POLYESTER FILM CAPACITORS

I. 1 MPT 111 SERIES 5.08 RADIAL LEADS.....	3
I. 2 MPT 221 SERIES RADIAL LEADS.....	6
1.3 MPT 301, MPT 300 HIGH VOLTAGE SERIES	9

II. POLYPROPYLENE FILM CAPACITORS

II. 1 MPP 221 SERIES RADIAL LEADS	11
II. 2 MPT-PP 221 SERIES RADIAL LEADS	13


III. INTERFERENCE SUPPRESSION CAPACITORS

III. 1 MPP 211 X2 RADIAL LEADS	15
III. 2 MPT 311 X2 RADIAL LEADS	16
III. 3 MPT 311 Y2/X1 RADIAL LEADS	18

IV. CAPACITORS MODULE.....	19
----------------------------	----

MULTILAYER CAPACITORS
WITH METALLIZED POLYESTER DIELECTRIC

SCHEMATIC CROSS SECTION

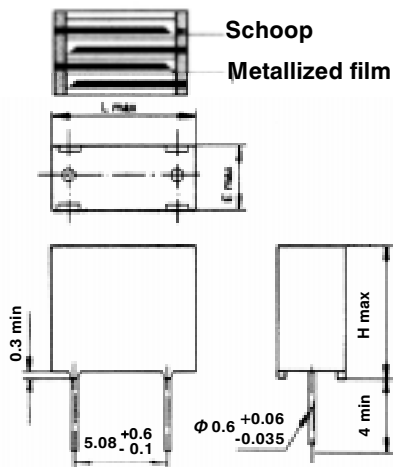

APPLICABLE SPECIFICATIONS

Non inductive winding with metallized polyester film.
Radial lead capacitors for use on printed circuit boards.
Thermoplastic case with stand-offs. Epoxy resin sealed.
Lead spacing: 5.08 mm.
For bandoliering (automatic insertion) please consult us.
Flame retardant plastic case and epoxy resin according to UL94V0

Some examples of use:

Supply decoupling, filter, integrator, treatment of analog signals.
rejection of line perturbation, etc.

Standartization

Conform to the requirements of specifications:
CECC 3000/30400; IEC 384-1/384-2

GENERAL SPECIFICATIONS

Climatic category: 55/100/56
Capacitance range: $C_R = 1 \text{ nF to } 1 \mu\text{F}$ (E6 and E12)
Capacitance tolerance: $\pm 5\%; \pm 10\%; \pm 20\%$
Rated voltage: $U_R = 63; 100; 250; 400 \text{ VDC}$
Category voltage: $U_C = 0.80 U_R / 100^\circ\text{C}$
Test voltage: $U_e = 1.6 U_R / 2 \text{ s at } 25^\circ\text{C}$
Dissipation factor: $\text{tg } \delta \leq 0.01 / 1\text{kHz}$
(typical: 50×10^{-4})

Insulation resistance at 20 °C

Between terminals		$C_R \leq 0.33 \mu\text{F}$	$C_R > 0.33 \mu\text{F}$
	$U_R \leq 100 \text{ V}$	$R_i \geq 3750 \text{ M}\Omega$	$R_i \times C_R \geq 1250 \text{ s}$
	$U_R > 100 \text{ V}$	$R_i \geq 7500 \text{ M}\Omega$	
Between terminals and ground		$\geq 3000 \text{ M}\Omega$	

Max. voltage gradient:

U_R (VDC)	63	100	250	400
du/dt max (V/ μs)	38	40	110	270

Humidity test: $\Delta C/C \leq 5\%; \Delta \text{tg } \delta \leq 50 \times 10^{-4}$ at 1 kHz
insulation resistance $\geq 50\%$ of initial
limit after 56 days (40°C/95% RH)

Life test: $\Delta C/C \leq 8\%; \Delta \text{tg } \delta \leq 50 \times 10^{-4}$ at 10 kHz
insulation resistance $\geq 50\%$ of initial
limit after 1000 h (100°C) $1.25 \times U_C$

Heat behaviour to soldering operation: Bath temperature: 260 °C
immersion time 1 nF to 100 nF: 5 s
150 nF to 1 μF : 10 s
Performance: $\Delta C/C \leq 2\%; \Delta \text{tg } \delta \leq 50 \times 10^{-4}$

Main parameters

Changes:

Marking:

Typical results see curves 1 to 4
On the upper side: LOGO CONIS
Rated capacitance in nF or mF
Capacitance tolerance J (5%); K (10%); M (20%)
DC rated voltage

Capacitance values (C_R) and rated voltages (U_R) depending on the cases

Leter code	C	D	F	G
Capacitance range	63 VDC 40 VAC	100 VDC 63 VAC	250 VDC 160 VAC	400 VDC 200 VAC
C_R /nF/	Case code			
1.0	01	01	01	01
1.5				
2.2				
3.3				
4.7				
6.8				
10				
15				
22				
33				07
47				
68	07			
100				
150				
220				
330	07			
470				
680				
1000				


Case code	Dimensions (mm)		
	L max	H max	E max
01	7.5	6.5	2.5
07	7.5	8.5	5.0

Example: 100 n K 63 100 nF $\pm 10\%$ 63V
2n2 M 100 2.2 nF $\pm 20\%$ 100V

- Packaging Bulk
Taping on reel or ammpack
for automatic insertion

LEAD TAPING AND PACKAGING
FOR AUTOMATIC INSERTION

Suffix	Dimensions H (mm)	Packaging
O	16.5 ± 0.3	Ampack
P	Panasert	Reel
Q	19.5 ± 0.5	Ampack
R	Avisert	Reel
S	18.0 ± 0.5	Ampack

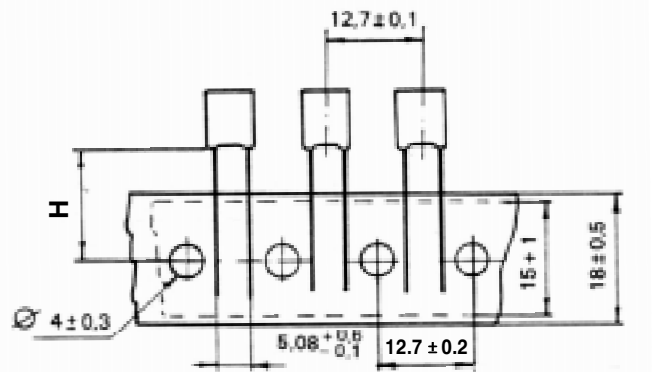


Dimensions (mm)
Technical terms: IEC 286-2


Packaging

Case	Quantity	
	Reel or Ampack	Bulk
01	3500	5000
07	1800	2500

Ampack

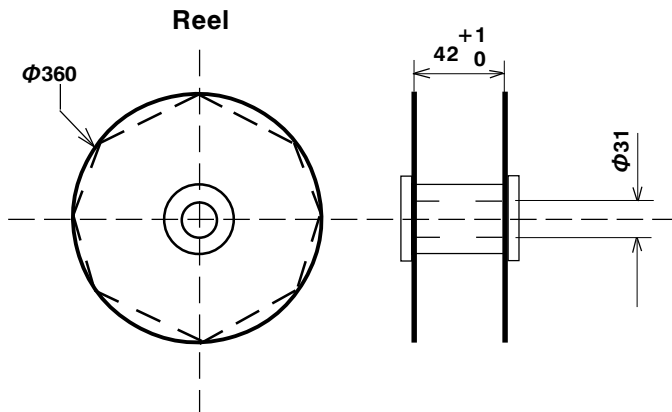


Dimensions (mm)

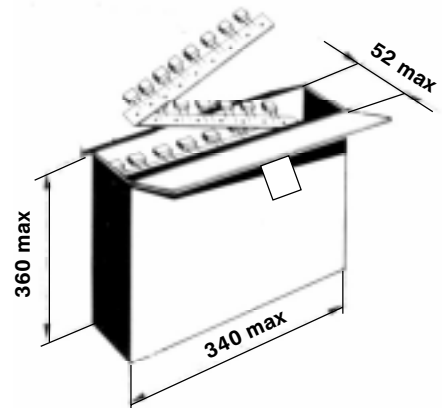


Dimensions (mm)

Ordering code

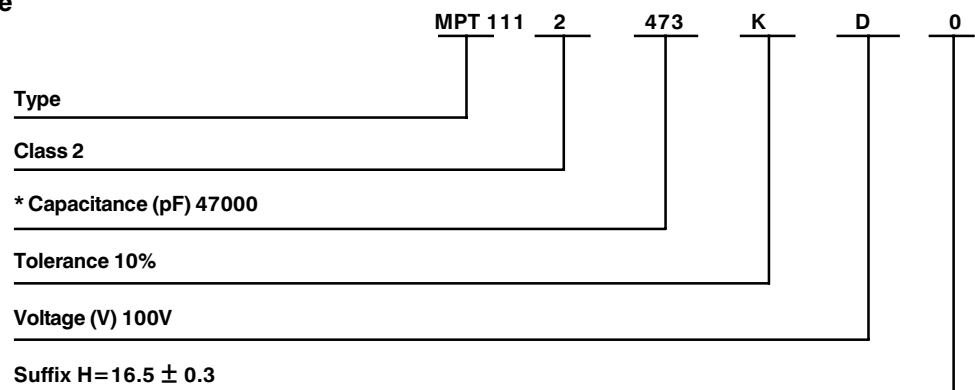


* The last figure indicates the number of zeroes


CHARACTERISTICS CURVES

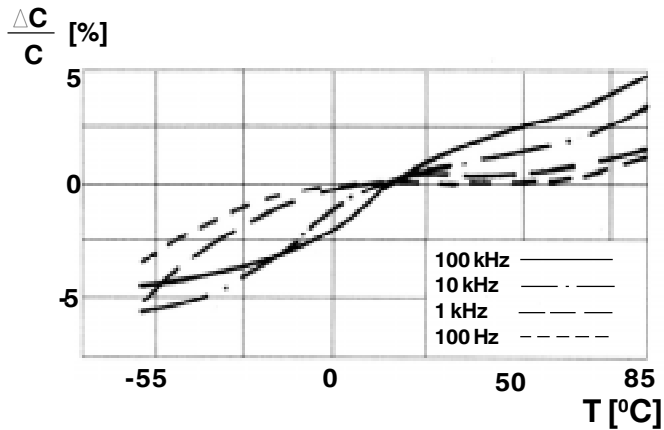


Capacitance vs. temperature

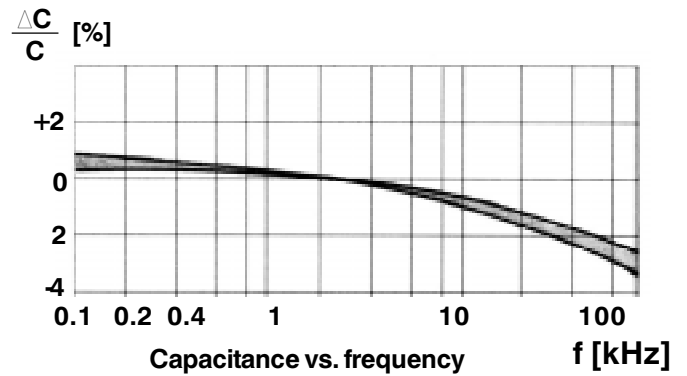

Capacitance vs. frequency


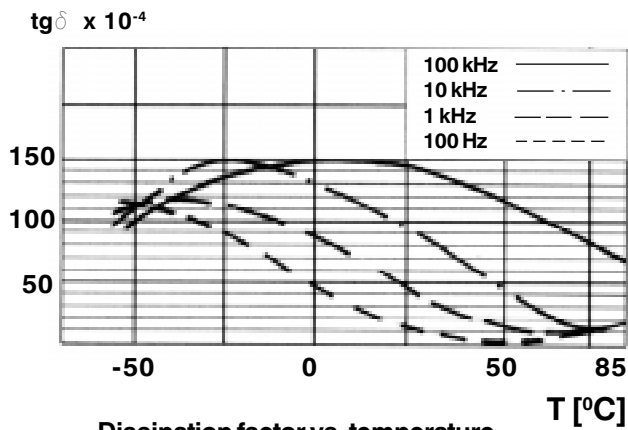


Dissipation factor vs. temperature

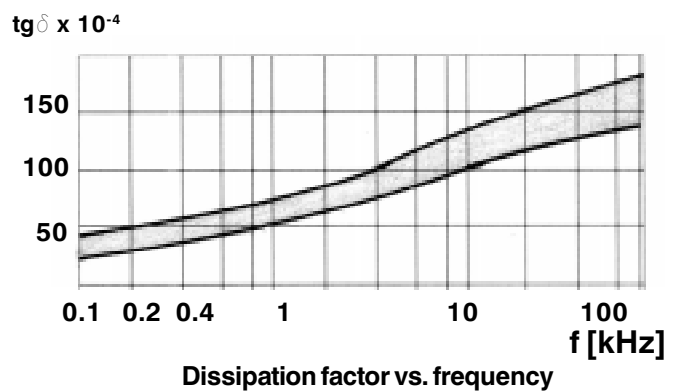


Dissipation factor vs. frequency

RATED RMS VOLTAGE VERSUS FREQUENCY

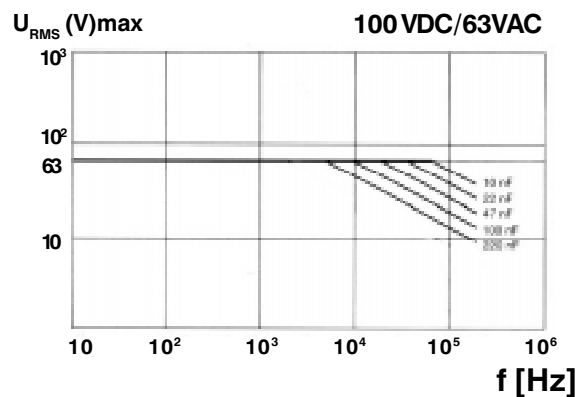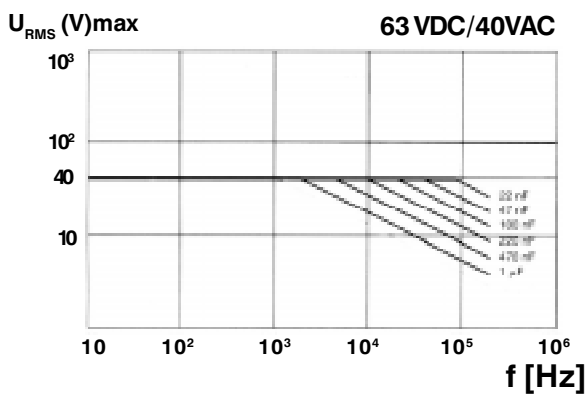

METALLIZED POLYESTER FILM CAPACITORS

SCHEMATIC CROSS SECTION

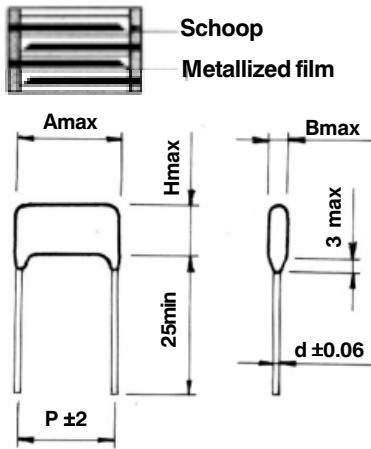

TYPICAL APPLICATIONS: blocking, coupling, decoupling, by-passing, interference suppression in low voltage applications.

GENERAL TECHNICAL DATA

Dielectric: Polyester film (polyethylene terephthalate)
 Plates: aluminium layer deposited by evaporation under vacuum.
 Protection: phenol-formaldehyde resin
 Climatic category: 40/85/21 IEC 68-1
 Related documents: IEC 384-2

ELECTRICAL CHARACTERISTICS

Capacitance range: $C_R = 4.7 \text{ nF to } 5\mu\text{F (E12)}$
 Capacitance tolerance: $\pm 5; \pm 10; \pm 20\%$
 Rated voltage: $U_R = 63; 160; 250; 400; 630 \text{ VDC}$
 Category voltage: $U_C = 0.80 U_R / 100^\circ\text{C}$
 Test voltage: $U_e = 1.4 U_R / 2 \text{ s at } 25^\circ\text{C}$
 Dissipation factor: $\text{tg } \delta \leq 100 \times 10^{-4} \text{ at } 1 \text{ kHz}$
 Insulation resistance at 20°C

Between terminals	$U_R < 100 \text{ V}$	$C_R \leq 0.33 \mu\text{F}$ $R_i \geq 3.75 \text{ G}\Omega$	$C_R > 0.33 \mu\text{F}$ $R_i \times C_R \geq 1250 \text{ s}$
	$U_R > 100 \text{ V}$	$R_i \geq 7.5 \text{ G}\Omega$	$R_i \times C_R \geq 2500 \text{ s}$
Between terminals and capacitor body		$R_i \geq 30 \text{ G}\Omega$	

Max pulse rise time (dv/dt)

U_R	Lead spacing „P“ (mm)						
	10	12.5	17.5	22.5	32.5		
63	3	3	1.5	1	1	dv/dt (V/μs)	
160	8	5	5	3	2	dv/dt (V/μs)	
250	11	7	4	3	3	dv/dt (V/μs)	
400	20	10	5.5	5	5	dv/dt (V/μs)	
630	30	30	15	8	7	dv/dt (V/μs)	

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions
 Temperature: $+ 40^\circ\text{C} \pm 2^\circ\text{C}$
 Relative humidity (RH): $93\% \pm 2\%$
 Test duration: 21 days
 Performance
 Capacitance change $\Delta C/C$: $\leq \pm 5\%$
 DF change $\Delta \text{tg } \delta$: $\leq 50 \times 10^{-4} \text{ at } 1 \text{ kHz}$
 Insulation resistance: $\geq 50\%$ of initial limit


Endurance:

Test conditions
 Temperature: $+ 85^\circ\text{C} \pm 2^\circ\text{C}$
 Test duration: 1000h
 Voltage applied: $1.25 \times U_R$
 Performance
 Capacitance change $\Delta C/C$: $\leq \pm 5\%$
 DF change $\Delta \text{tg } \delta$: $\leq 50 \times 10^{-4} \text{ at } 10 \text{ kHz for } C \leq 1\mu\text{F}$
 $\leq 30 \times 10^{-4} \text{ at } 1 \text{ kHz for } C > 1\mu\text{F}$
 Insulation resistance: $\geq 50\%$ of initial limit

Resistance to soldering heat:

Test conditions
 Solder bath temperature: $+ 260^\circ\text{C} \pm 5^\circ\text{C}$
 Dipping time (with heat screen): $10 \pm 1 \text{ s}$
 Performance
 Capacitance change $\Delta C/C$: $\leq \pm 2\%$
 DF change $\Delta \text{tg } \delta$: $\leq 50 \times 10^{-4} \text{ at } 10 \text{ kHz for } C \leq 1\mu\text{F}$
 $\leq 30 \times 10^{-4} \text{ at } 1 \text{ kHz for } C > 1\mu\text{F}$
 Insulation resistance: \geq initial limit

Ordering code

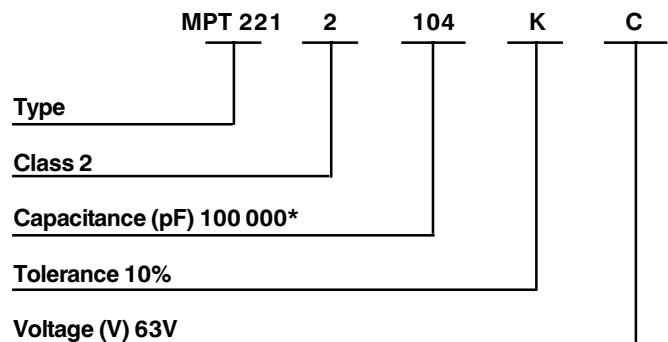

* The last figure indicates the number of zeroes

- Marking: Type
 Rated capacitance in nF or μF
 Capacitance tolerance J (5%); K (10%); M (20%)
 DC rated voltage


Example: **100 n K 63** 100 nF ± 10% 63V
2μ2 M 250 2.2 μF ± 20% 250V

CAPACITANCE VALUE (C_R) RATED VOLTAGE (U_R) AND DIMENSIONS (mm)


U_R (VDC)	63 and 160				250				400				630			
Letter code	C		E		F				G				I			
C_R (mF)	Amax	Bmax	Hmax	P	Amax	Bmax	Hmax	P	Amax	Bmax	Hmax	P	Amax	Bmax	Hmax	P
0.0047					15.0	5.6	10.0	12.5	15.0	5.6	10.0	12.5	15.0	5.6	10.0	12.5
0.0051					15.0	5.8	10.2	12.5	15.0	5.8	10.2	12.5	15.0	5.8	10.2	12.5
0.0068					15.0	5.9	10.3	12.5	15.0	5.9	10.3	12.5	15.0	6.5	10.9	12.5
0,010	15,0	5,0	8,2	12,5	15,0	5,0	8,2	12,5	15,0	5,0	8,2	12,5	15,0	5,0	8,2	12,5
	13,0	5,2	8,6	10,0	13,0	5,2	6,6	10,0	13,0	5,2	8,6	10,0				
0,015	15.0	4.7	8.3	12.5	15.0	4.7	8.3	12.5	15.0	4.7	8.3	12.5	15.0	4.7	8.3	12.5
	13.0	5.2	8.6	10.0	13.0	5.2	8.6	10.0	13.0	5.2	8.6	10.0				
0.022	15.0	4.9	8.5	12.5	15.0	4.9	8.5	12.5	15.0	4.9	8.5	12.5	15.0	4.9	8.5	12.5
	13.0	5.2	8.6	10.0	13.0	5.4	8.8	10.0	13.0	5.4	8.8	10.0				
0.033	15.0	5.8	10.0	12.5	15.0	5.8	10.0	12.5	15.0	5.8	10.0	12.5	15.0	6.0	10.4	12.5
					13.0	5.0	10.6	10.0	13.0	6.0	10.6	10.0				
0.047	15.0	6.0	10.4	12.5	15.0	6.0	10.4	12.5	15.0	6.0	10.4	12.5	20.0	6.0	10.6	17.5
					13.0	6.4	10.6	10.0	13.0	6.4	10.6	10.0				
0.068	15.0	4.8	8.3	12.5	15.0	4.8	8.3	12.5	15.0	7.1	11.5	12.5	20.0	6.6	11.6	17.5
					13.0	5.4	8.4	10.0	13.0	6.4	11.9	10.0				
0.10	15.0	5.4	8.9	12.5	15.0	5.4	8.9	12.5	20.0	6.2	11.4	17.5	20.0	7.3	12.0	17.5
					13.0	5.6	9.2	10.0								
0.12	15.0	5.9	9.5	12.5	15.0	5.9	9.5	12.5	20.0	6.8	12.0	17.5	25.0	6.2	11.5	22.5
					13.0	6.2	9.8	10.0								
0.15	15.0	6.7	10.6	12.5	15.0	6.7	10.6	12.5	20.0	7.6	12.8	17.5	25.0	6.6	12.3	22.5
					13.0	6.9	11.4	10.0								
0.18	15.0	6.3	10.7	12.5	20.0	5.5	9.8	17.5	20.0	8.1	13.2	17.5	25.0	7.0	13.5	22.5
0.22	15.0	6.7	11.0	12.5	20.0	5.9	10.1	17.5	25.0	9.2	13.5	22.5	25.0	8.1	14.2	22.5
0.33	20.0	6.0	11.2	17.5	20.0	6.9	11.5	17.5	25.0	9.8	14.3	22.5				
0.39	20.0	6.5	11.7	17.5	20.0	7.3	12.4	17.5	25.0	10.2	15.2	22.5				
0.47	20.0	6.8	12.0	17.5	25.0	6.5	12.2	22.5	25.0	10.5	16.9	22.5				
0.56	20.0	7.4	12.6	17.5	25.0	7.0	12.8	22.5	25.0	11.8	17.9	22.5				
0.68	20.0	7.9	13.1	17.5	25.0	7.4	13.0	22.5	35.0	8.6	16.2	32.5				
0.82	20.0	8.3	13.5	17.5	25.0	8.1	13.7	22.5	35.0	9.7	17.0	32.5				
1.0	25.0	7.5	12.7	22.5	25.0	8.7	14.5	22.5	35.0	10.0	18.0	32.5				
1.2	25.0	8.6	13.8	22.5	25.0	9.5	15.3	22.5								
1.5	25.0	8.8	15.5	22.5	25.0	10.0	16.3	22.5								
2.2	25.0	10.2	17.1	22.5	35.0	9.0	19.0	32.5								
4.0	35.0	11.2	20.3	32.5	40.0	11.3	20.3	37.5								
5.0	35.0	11.3	21.2	32.5												

* For P < 22.5 mm d=0.6 mm
 * For P ≥ 22.5 mm d=0.8 mm


CHARACTERISTICS CURVES

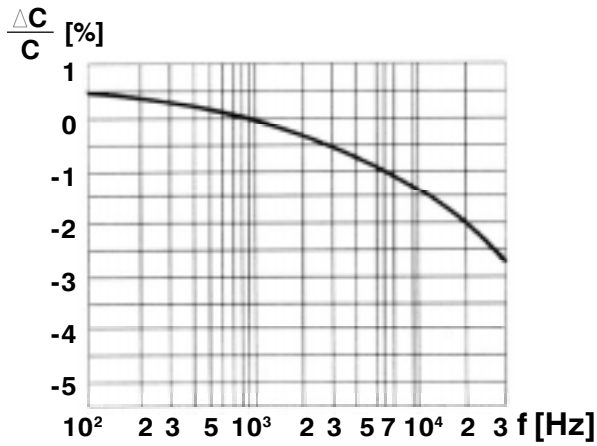


Capacitance vs. frequency

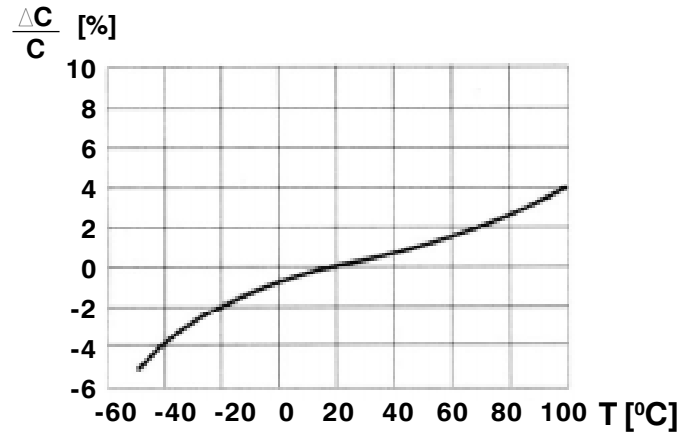


Capacitance vs. temperature at 1 kHz

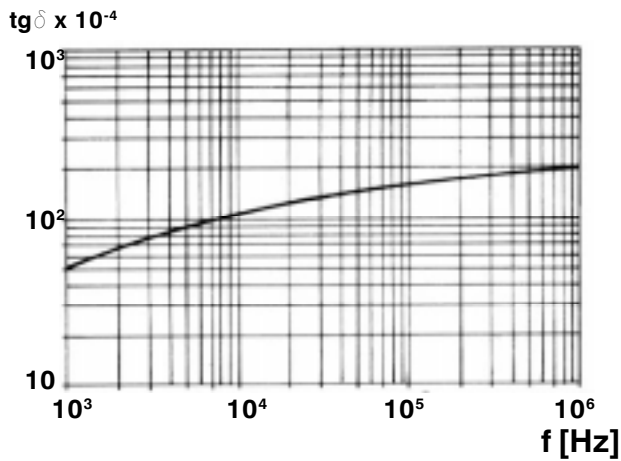

Dissipation factor vs. frequency

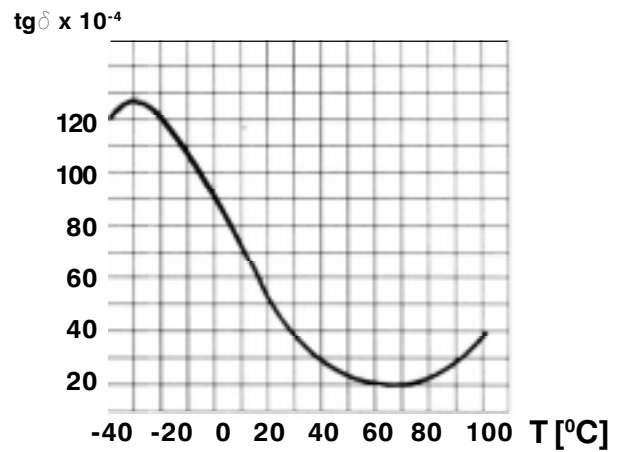

Dissipation factor vs. temperature

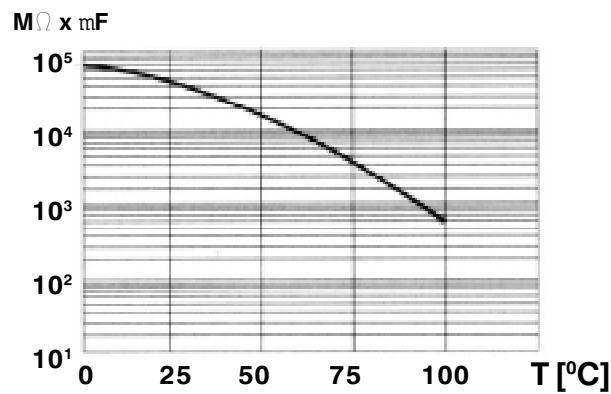


Time constant vs. temperature

MPT 301 RADIAL LEADS MPT 300 WITHOUT LEADS

METALLIZED POLYESTER FILM CAPACITORS

SCHEMATIC CROSS SECTION

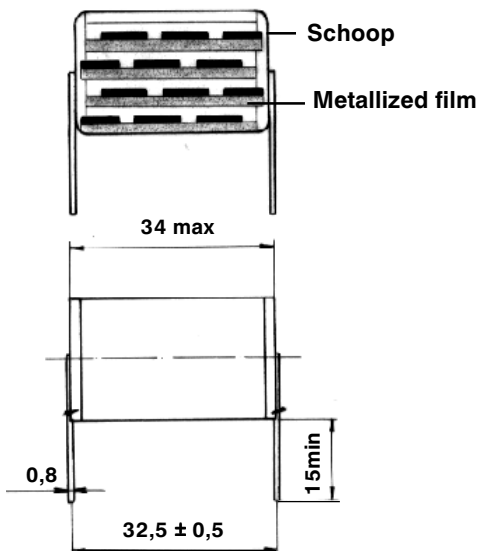

TYPICAL APPLICATIONS:

The capacitor is intended for building-up in:
Module for High Voltage Multiplication
Direct Current and Ripple Current Circuits
Continuous and impulse Duty

The capacitor is a bare type or with a PVC cover, cylindrical with radial leads, with internal connected in series capacitors.

GENERAL TECHNICAL DATA

Dielectric: Polyester film (polyethylene terephthalate)

Plates: Aluminium layer deposited by evaporation under vacuum.

Temperature range: -20 °C + 75 °C

Related documents: Internal standard confirmed

ELECTRICAL CHARACTERISTICS

Capacitance range: $C_R = 0,001 \mu\text{F}$ to $0,01 \mu\text{F}$

Capacitance

tolerance: $\pm 10\%$ /K/ and $\pm 20\%$ /M/- 1 kHz

Rated voltage: $U_R = 10 \text{ kV}, 15 \text{ kV}$

Test voltage: between terminals $1,2U_R$ DC for 60+1 s

Dissipation factor: $\text{tg} \delta \leq 100 \times 10^{-4}$ at 1kHz

Insulation resistance


between terminals: $\geq 100\,000 \text{ M}\Omega$ et 25 °C 100VDC 1min

Capacitance value and dimensions

C_R (μF)	Dimensions (mm)		
	L max	Φ max	P ± 0.4
0.0010	34	7,5	32,5
0.0025	34	10	32,5
0.0047	34	13	32,5
0.0100	34	16	32,5

Other capacitances values on request

ORDERING CODE

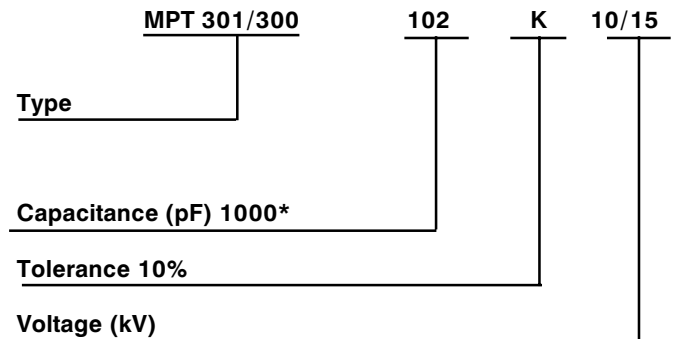

* The last figure indicates the number of zeroes

ENDURANCE:

Test conditions

Temperature: + 75 °C ± 2 °C

Test duration: 1000 h

Voltage applied: $1.2 \times U_R$

Performance


Capacitance change $\Delta C/C$: $\leq \pm 30\%$

DF change $\Delta \text{tg} \delta$: $\leq 1,2 \times 10^{-2}$


Insulation resistance: $\geq 5000 \text{ M}\Omega$

MPT 301 RADIAL LEADS MPT 300 WITHOUT LEADS


CHARACTERISTICS CURVES

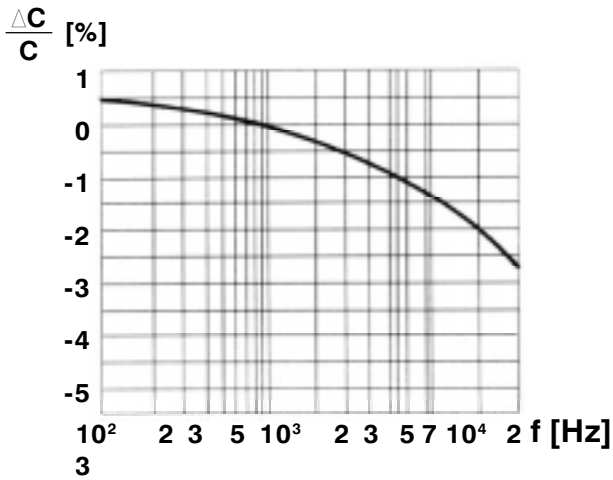


Capacitance vs. frequency

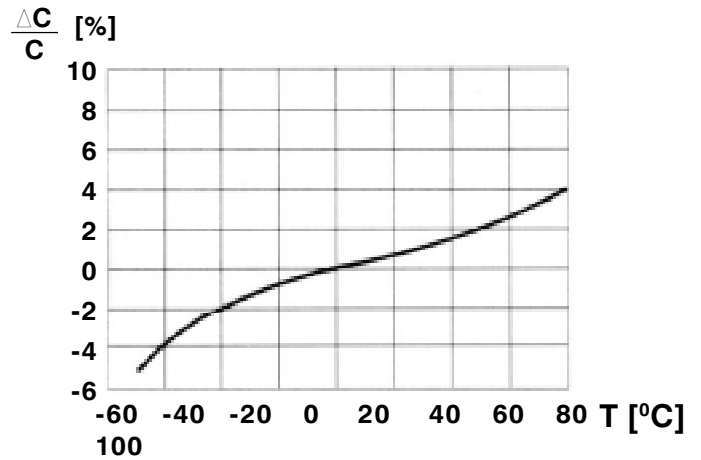


Capacitance vs. temperature at 1 kHz

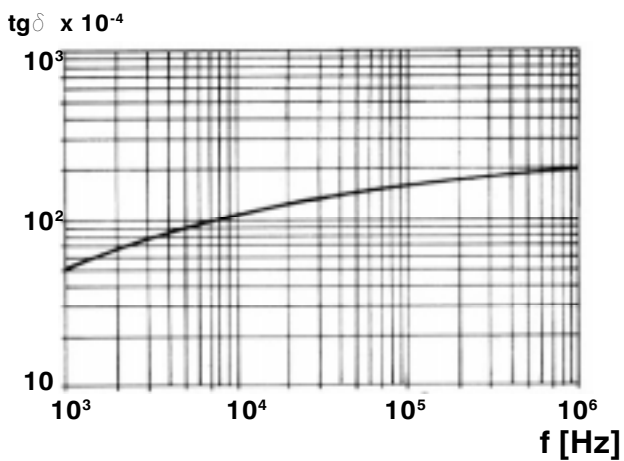

Dissipation factor vs. frequency

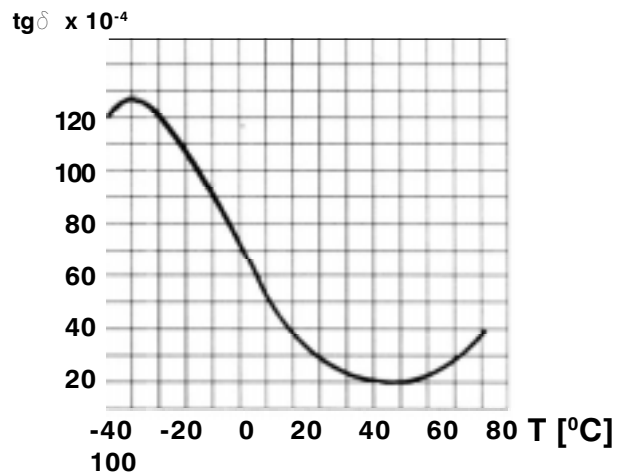


Dissipation factor vs. temperature

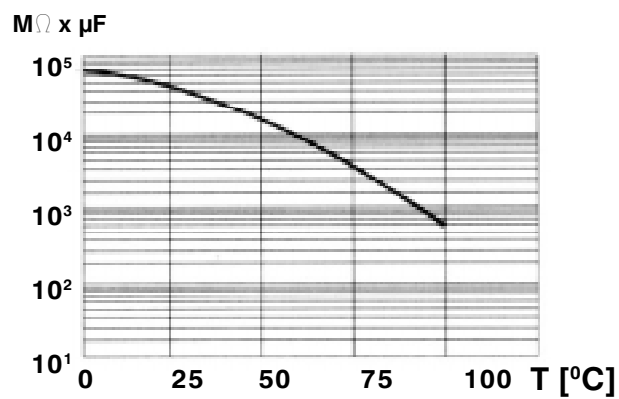

Time constant vs. temperature

METALLIZED POLYPROPYLENE FILM CAPACITORS

SCHEMATIC CROSS SECTION

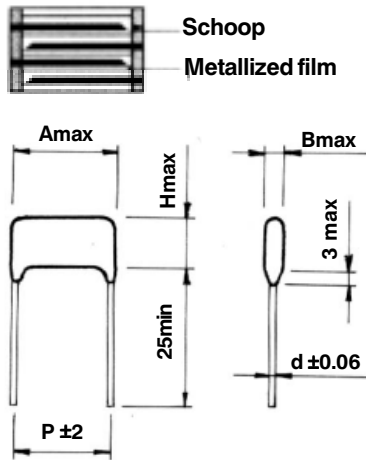

TYPICAL APPLICATIONS: Temperature compensation circuits, timing oscillator circuits, power factor correction and coupling capacitor in SMPS applications.

GENERAL TECHNICAL DATA

Dielectric: Polypropylene film
Plates: Aluminium layer deposited by evaporation under vacuum.
Protection: Phenol-formaldehyde resin
Climatic category: 40/85/21 IEC 68-1
Related documents: IEC 384-16

ELECTRICAL CHARACTERISTICS

Capacitance range: $C_R = 33 \text{ nF to } 1 \mu\text{F (E6)}$
Capacitance tolerance: $\pm 5; \pm 10; \pm 20\%$
Rated voltage: $U_R = 160; 250; 400; 630 \text{ VDC}$
 $U_R = 90; 160; 220; 250 \text{ VAC}$
Category voltage: up to $+85^\circ\text{C}$ $U_C = U_R$
Test voltage: $U_e = 1.6 U_R / 2 \text{ s at } 25^\circ\text{C}$
Dissipation factor: $\text{tg } \delta \leq 20 \times 10^{-4} \text{ at } 1 \text{ kHz}$
Insulation resistance $\geq 100 \text{ 000 M}\Omega$ for $C \leq 0.33 \mu\text{F}$
 $> 30 \text{ 000 M}\Omega$ for $C > 0.33 \mu\text{F}$

- Max pulse rise time (dv/dt)

U_R	Lead spacing „P“ (mm)				
	12.5	17.5	22.5	32.5	
160	4	2	1.5	1	dv/dt (V/μs)
250		7	4	3	dv/dt (V/μs)
400		10	5.5	5	dv/dt (V/μs)
630		15	8	7	dv/dt (V/μs)

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions

Temperature: $+40^\circ\text{C} \pm 2^\circ\text{C}$
Relative humidity (RH): $93\% \pm 2\%$
Test duration: 21 days

Performance

Capacitance change $\Delta C/C$: $\leq \pm 5\%$
DF change $\Delta \text{tg } \delta$: $\leq 20 \times 10^{-4}$ at 1 kHz
Insulation resistance: $\geq 50\%$ of initial limit

Endurance:

Test conditions

Temperature: $+85^\circ\text{C} \pm 2^\circ\text{C}$
Test duration: 1000h
Voltage applied: $1.25 \times V_R$

Performance

Capacitance change $\Delta C/C$: $\leq \pm 5\%$
DF change $\Delta \text{tg } \delta$: $\leq 40 \times 10^{-4}$ at 10 kHz for $C \leq 1 \mu\text{F}$
 $\leq 40 \times 10^{-4}$ at 1 kHz for $C > 1 \mu\text{F}$
Insulation resistance: $\geq 50\%$ of initial limit

Resistance to soldering heat:


Test conditions

Solder bath temperature: $+260^\circ\text{C} \pm 5^\circ\text{C}$
Dipping time (with heat screen): $10 \text{ s} \pm 1 \text{ s}$

Performance

Capacitance change $\Delta C/C$: $\leq \pm 3\%$
DF change $\Delta \text{tg } \delta$: $\leq 40 \times 10^{-4}$ at 10 kHz for $C \leq 1 \mu\text{F}$
 $\leq 40 \times 10^{-4}$ at 1 kHz for $C > 1 \mu\text{F}$
Insulation resistance: \geq initial limit

ORDERING CODE

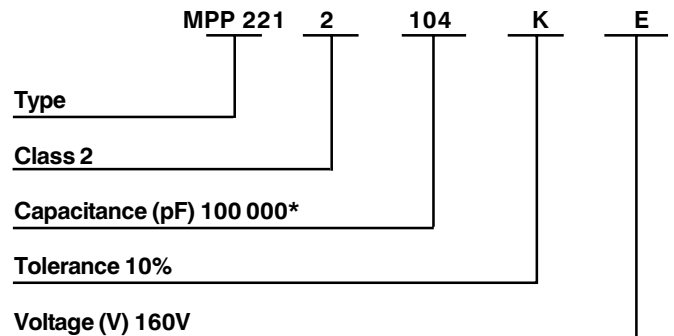

* The last figure indicates the number of zeroes

Marking:

Type
Rated capacitance in nF or μF
Capacitance tolerance J (5%); K (10%); M (20%)
DC rated voltage


Example: 100 n K 160 100 nF $\pm 10\%$ 160V
1μ0 M 250 1.0 μF $\pm 20\%$ 250V

CAPACITANCE VALUE (C_R) RATED VOLTAGE (U_R)

Cap. μF	Rated voltage VDC/VAC	Dimensions /mm/					
		Lmax	Bmax	Hmax	P \pm 2	d	
0.047	160/90 250/160	15	6.5	9.5	12.5	0.6	
0.100		20	5.5	8.5	17.5		
0.150		20	9.0	13.0			
0.220			20	9.0	13.0		
0.330			25	8.0	13.0	22.5	0.8
0.430			25	8.0	13.0		
0.470			25	9.0	15.0		
0.680			25	11.0	18.0		
1.000			25	13.0	19.0		
0.033	400/220	15	4.8	8.5	12.5	0.6	
0.047		15	6.0	10.2			
0.068		15	6.6	11.2			
0.100		20	6.2	10.3	17.5		
0.120		25	5.3	10.9	22.5	0.8	
0.150		25	5.8	11.5			
0.180		25	6.4	11.8			
0.220		25	7.1	13.1			
0.270		25	7.8	13.9			
0.330		25	8.7	15.0			
0.390		25	9.5	15.8			
0.470		25	10.3	18.0			
0.680		35	8.3	16.6	32.5		
1.000		35	11.5	21.0			
0.027		630/250	15	7.5	11.0		12.5
0.033	20		6.5	11.0	17.5		
0.047	20		7.0	11.5			
0.330	25		9.7	17.0	22.5	0.8	
0.470	25		12.3	19.0			

POLYPROPYLENE CAPACITORS WITH DOUBLE SIDED METALLIZED FILM ELECTRODES

SCHEMATIC CROSS SECTION

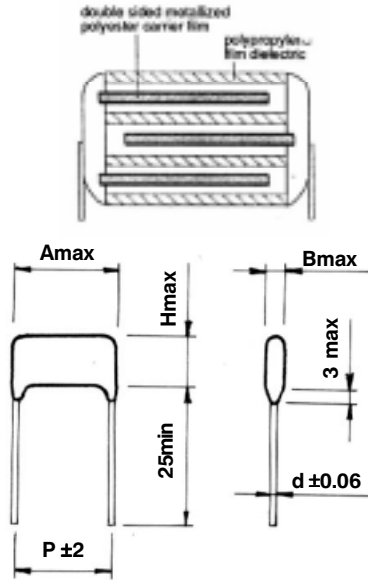

TYPICAL APPLICATIONS: Polypropylene capacitors type MPT-PP 221 are intended for use in electrical circuits with direct and alternating current. Also they may work in pulse regime.

GENERAL TECHNICAL DATA

Dielectric: Polypropylene film
Plates: Double sided metallized polyester film
Climatic category: 40/85/21 IEC 68-1
Related documents: IEC 384-16

ELECTRICAL CHARACTERISTICS

Capacitance range: $C_R = 27 \text{ nF to } 330 \text{ nF}$
Capacitance tolerance: $\pm 5; \pm 10; \pm 20\%$
Rated voltage: $U_R = 630 \text{ VDC}$
 $U_R = 250 \text{ VAC}$
Category voltage: up to $+85 \text{ }^\circ\text{C}$ $U_C = U_R$
Test voltage: $U_e = 1.6 U_R / 2 \text{ s at } 25 \text{ }^\circ\text{C}$
Dissipation factor: $\text{tg } \delta \leq 20 \times 10^{-4} \text{ 1kHz}$
Insulation resistance between terminals: $\geq 100 \text{ 000 M}\Omega$

Max pulse rise time dv/dt (V/ms)

U_R	Lead spacing „P“ (mm)	
	17.5	22.5
160	2	1.5
250	7	4
400	10	5.5
630	15	8

Cap. μF	Rated voltage VDC/VAC	Dimensions /mm/					
		A max	Bmax	Hmax	P±2	d	
0.027	630/250	20	5	11	17.5	0.6	
			6	12			
0.047		25	25	8	13	22.5	0.8
				12.5	10.5		
				13.5	22.5		
0.100							
0.220							
0.330							

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions
Temperature: $+ 40 \text{ }^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$
Relative humidity (RH): $93\% \pm 2\%$
Test duration: 21 days
Performance
Capacitance change $\Delta C/C$: $\leq \pm 5\%$
DF change $\Delta \text{tg } \delta$: $\leq 20 \times 10^{-4} \text{ at } 1 \text{ kHz}$
Insulation resistance: $\geq 50\%$ of initial limit

Endurance:


Test conditions
Temperature: $+ 85 \text{ }^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$
Test duration: 1000 h
Voltage applied: $1.25 \times U_R$
Performance
Capacitance change $\Delta C/C$: $\leq \pm 5\%$
DF change $\Delta \text{tg } \delta$: $\leq 40 \times 10^{-4} \text{ at } 10 \text{ kHz for } C \leq 1 \mu\text{F}$
 $\leq 40 \times 10^{-4} \text{ at } 1 \text{ kHz for } C > 1 \mu\text{F}$
Insulation resistance: $\geq 50\%$ of initial limit

Resistance to soldering heat:


Test conditions
Solder bath temperature: $+ 260 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$
Dipping time (with heat screen): $10 \text{ s} \pm 1 \text{ s}$
Performance
Capacitance change $\Delta C/C$: $\leq \pm 3\%$
DF change $\Delta \text{tg } \delta$: $\leq 40 \times 10^{-4} \text{ at } 10 \text{ kHz for } C \leq 1 \mu\text{F}$
 $\leq 40 \times 10^{-4} \text{ at } 1 \text{ kHz for } C > 1 \mu\text{F}$
Insulation resistance: $\geq \text{initial limit}$
Marking: Type
 Rated capacitance in nF or μF
 Capacitance tolerance J (5%); K (10%); M (20%)
 DC rated voltage

Example: 100 n K 630 100 nF $\pm 10\%$ 630V


CHARACTERISTICS CURVES

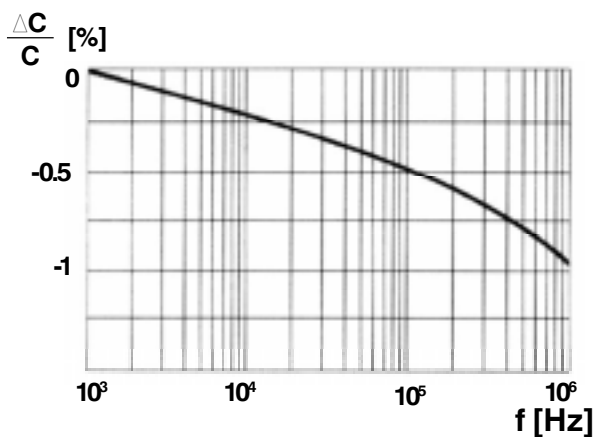


Capacitance vs. frequency

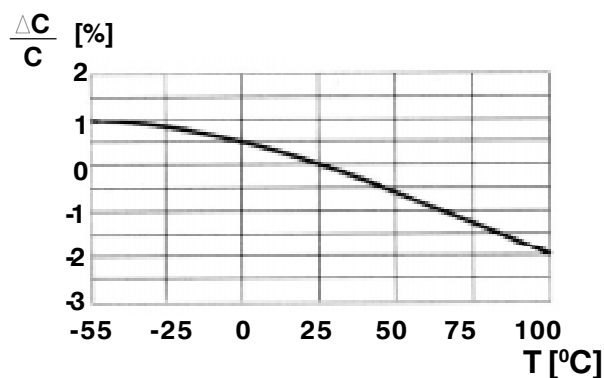


Capacitance vs. temperature at 1 kHz

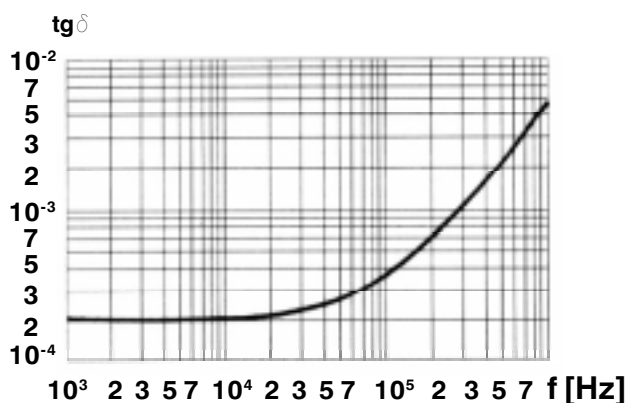

Dissipation factor vs. frequency

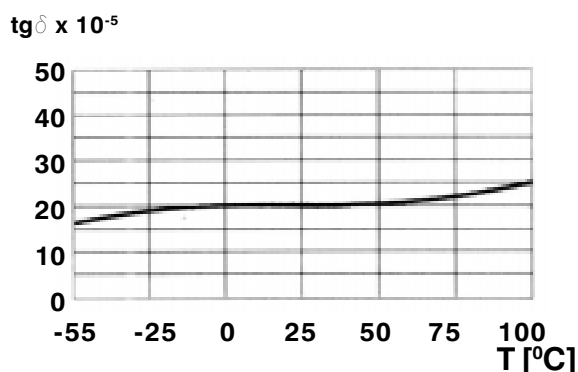



Dissipation factor vs. temperature at 1 kHz

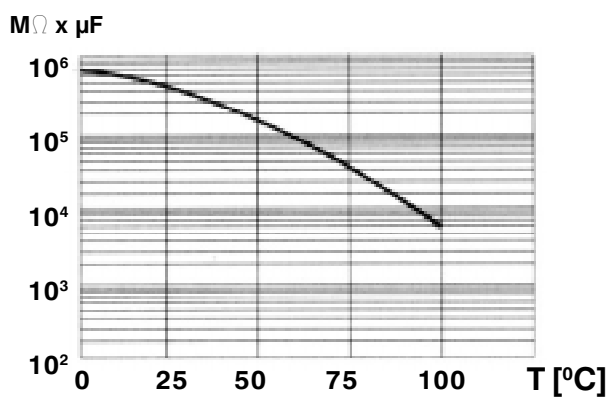

Time constant vs. temperature

METALLIZED POLYPROPYLEN FILM CAPACITORS

SCHEMATIC CROSS SECTION

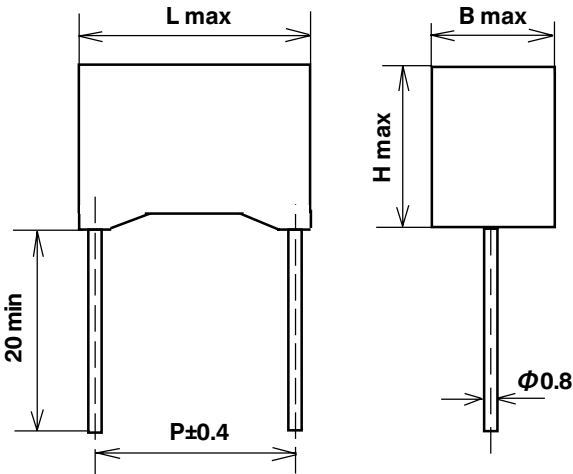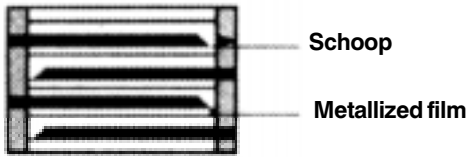

TYPICAL APPLICATIONS:

Interference suppression and across-the-line applications. Suitable for use in situations where failure of the capacitor would not lead to danger of electric shock.

GENERAL TECHNICAL DATA

Dielectric: Polypropylene film
Plates: Metal layer deposited by evaporation under vacuum.
Leads: Tinned wire or insulated tigid leads
Protection: Plastic case flame retardant and epoxi resin-according to UL 94 V0
Climatic category: 40/100/56 IEC 60068-1
Related documents: EN 132400

APPROVAL



ELECTRICAL CHARACTERISTICS

Capacitance range: $C_R = 0.022 \mu F$ to $4,7 \mu F$
Capacitance tolerance: $\pm 10\%$ (K); $\pm 20\%$ (M) at 1 kHz
Rated voltage: $U_R = 275 \text{ VAC}$
Test voltage between terminals: 1500 VAC for 1 s + 2200 VDC for 1 s at $+25 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$
Dissipation factor: $\text{tg}d \leq 20 \times 10^{-4}$ at $25 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ and 1kHz
Insulation resistance at $25^\circ\text{C} \pm 5^\circ\text{C}$ and 100VDC - 1 min: $\geq 1.10^5 \text{ M}\Omega$ for $C \leq 0.33 \mu F$
 $\geq 30\,000 \text{ s}$ for $C > 0.33 \mu F$
Max pulse rise time dv/dt (V/ μs): $100 \text{ V}/\mu s$ at 390VDC

Rated capacitance μF	Dimensions (mm)			
	max B	max H	max L	P±0.4
0.022	5.0	11.0	18.0	15.0
0.047	5.0	11.0	18.0	15.0
0.068	5.0	11.0	18.0	15.0
0.100	6.0	12.0	18.0	15.0
0.220	6.0	15.0	26.5	22.5
0.330	7.0	16.0	26.5	22.5
0.470	9.0	17.0	32.0	27.5
0.680	10.0	20.0	32.0	27.5
1.000	11.0	20.0	32.0	27.5
1.500	15.0	24.5	32.0	27.5
2.200	13.0	24.0	41.5	37.5
3.300	16.0	28.5	41.5	37.5
3.750	19.0	32.0	41.5	37.5
4.400	19.0	32.0	41.5	37.5
4.700	19.0	32.0	41.5	37.5

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions
Temperature: $+ 40 \text{ }^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$
Relative humidity (RH): $93\% \pm 2\%$
Test duration: 56 days
Performance
Dielectric strength: no dielectric breakdown or flashover at 66% of $4.3 \times U_R$ (DC)/1 min
Capacitance change: $\Delta C/C \leq \pm 5\%$
Insulation resistance: $\geq 50\%$ of initial limit

Endurance:

Test conditions
Temperature: $+ 100 \text{ }^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$
Test duration: 1000h
Voltage applied: $1.25 \times U_R + 1000 U_{AC}$ 0.1 s/h

Performance

Dielectric strength: no dielectric breakdown or flashover at 66% of $4.3 \times U_R$ (DC)/1 min
Capacitance change: $\Delta C/C \leq \pm 10\%$
Insulation resistance: $\geq 50\%$ of initial limit

Resistance to soldering heat:


Test conditions
Solder bath temperature: $+ 260 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$
Dipping time (with heat screen): $10 \text{ s} \pm 1 \text{ s}$
Performance
Capacitance change: $\Delta C/C \leq \pm 3\%$

Marking:

Manufacturer's logo, series, capacitance, tolerance rated voltage, capacitor class, dielectric code, climatic category.

METALLIZED POLYESTER FILM CAPACITORS

SCHEMATIC CROSS SECTION

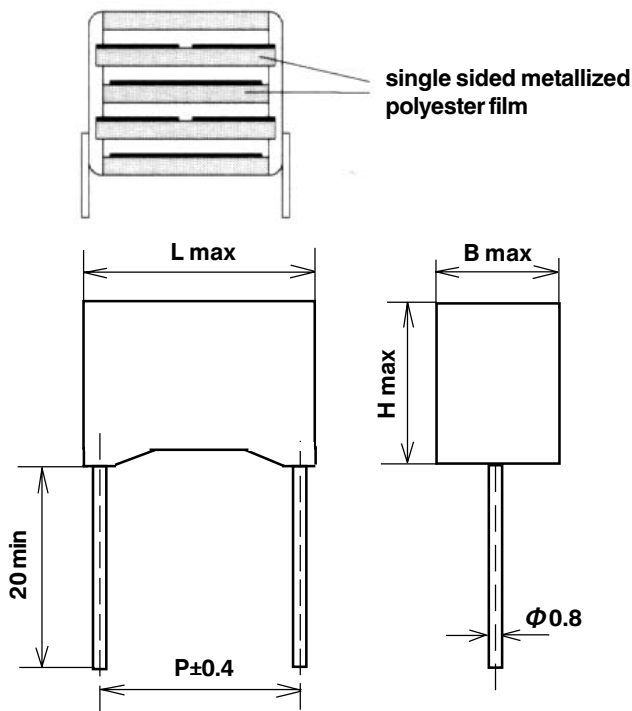

TYPICAL APPLICATIONS:

Interference suppression and „across-the-line“ applications. Suitable for use in situations where failure of the capacitor would not lead to danger of electric shock.

GENERAL TECHNICAL DATA

Dielectric: Polyester film (polyethylene terephthalate)

Plates: Metal layer deposited by evaporation under vacuum.

Climatic category: 40/100/56 IEC 68-1

Related documents: IEC 384-14; VDE 0565-1

ELECTRICAL CHARACTERISTICS

Capacitance range: $C_R = 0.022 \mu\text{F}$ to $2.2 \mu\text{F}$

Capacitance tolerance: $\pm 10\%$ (K); $\pm 20\%$ (M) at 1 kHz

Rated voltage: $U_R = 250 \text{ VAC}$

Test voltage: between terminals $4.3U_R$ DC for 2s at $25^\circ\text{C} \pm 5^\circ\text{C}$

Dissipation factor: $\text{tg}\delta \leq 100 \times 10^{-4}$ at $25^\circ\text{C} \pm 5^\circ\text{C}$ and 1kHz

Insulation resistance at $25^\circ\text{C} \pm 5^\circ\text{C}$

and 100VDC - 1 min: $\geq 15\,000 \text{ M}\Omega$ for $C \leq 0.33 \mu\text{F}$

$\geq 5\,000 \text{ s}$ for $C > 0.33 \mu\text{F}$

Max pulse rise time dv/dt (V/ μs): $100 \text{ V}/\mu\text{s}$ at 350VDC

Rated capacitance μF	Dimensions (mm)			
	max B	max H	max L	P ± 0.4
0.022	5.0	10.8	18.0	15.0
0.047	5.0	10.8	18.0	15.0
0.068	7.5	13.5	18.0	15.0
0.100	7.5	13.5	18.0	15.0
0.220	7.0	16.0	26.5	22.5
0.330	10.0	18.5	26.5	22.5
0.470	11.0	20.0	32.0	27.5
0.680	11.0	20.0	32.0	27.5
1.000	13.0	22.0	32.0	27.5
1.500	18.0	33.0	32.0	27.5
2.200	22.0	37.0	32.0	27.5

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions

Temperature: $+40^\circ\text{C} \pm 2^\circ\text{C}$

Relative humidity (RH): $93\% \pm 2\%$

Test duration: 56 days

Performance

Dielectric strength: no dielectric breakdown or flashover at 66% of $4.3 \times U_R$ (DC)/1 min

Capacitance change $\Delta C/C \leq \pm 5\%$

Insulation resistance: $\geq 50\%$ of initial limit

Endurance:

Test conditions

Temperature: $+100^\circ\text{C} \pm 2^\circ\text{C}$

Test duration: 1000h

Voltage applied: $1.25 \times U_R + 1000 \text{ VAC}$ 0.1 s/h

Performance

Dielectric strength: no dielectric breakdown or flashover at 66% of $4.3 \times U_R$ (DC)/1 min

Capacitance change $\Delta C/C \leq \pm 10\%$

Insulation resistance: $\geq 50\%$ of initial limit

Resistance to soldering heat:

Test conditions

Solder bath temperature: $+260^\circ\text{C} \pm 5^\circ\text{C}$

Dipping time (with heat screen): $10 \text{ s} \pm 1 \text{ s}$


Performance

Capacitance change: $\Delta C/C \leq \pm 3\%$


Marking:

Manufacturer's logo, series, capacitance, tolerance, rated voltage, capacitor class, dielectric code, climatic category.


CHARACTERISTICS CURVES

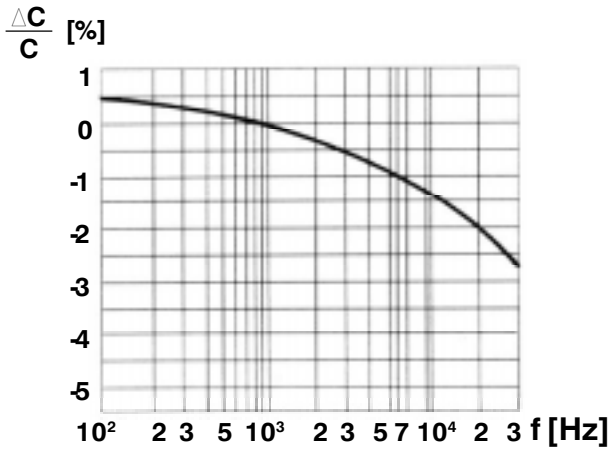


Capacitance vs. frequency

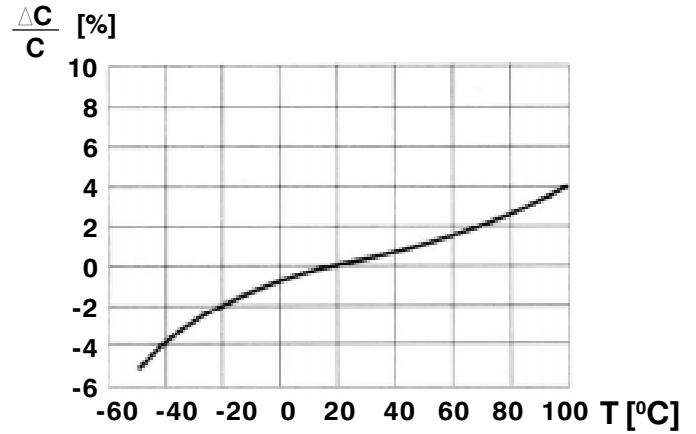


Capacitance vs. temperature at 1 kHz

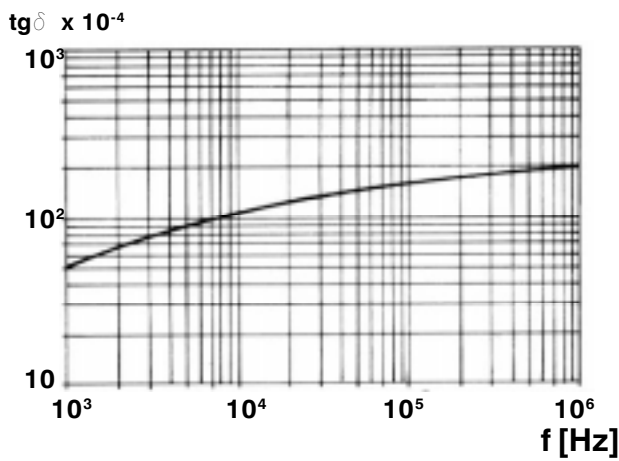


Dissipation factor vs. frequency

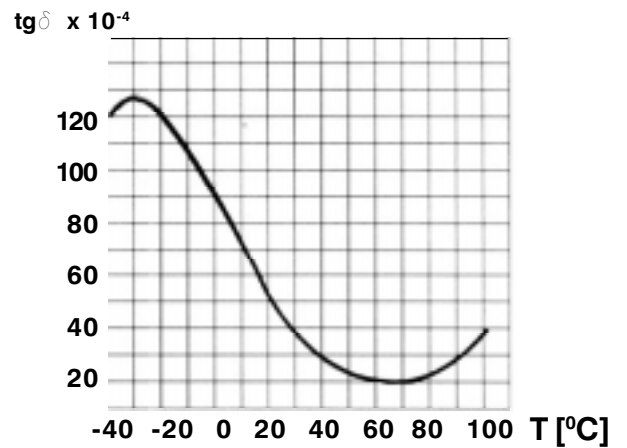

Dissipation factor vs. temperature

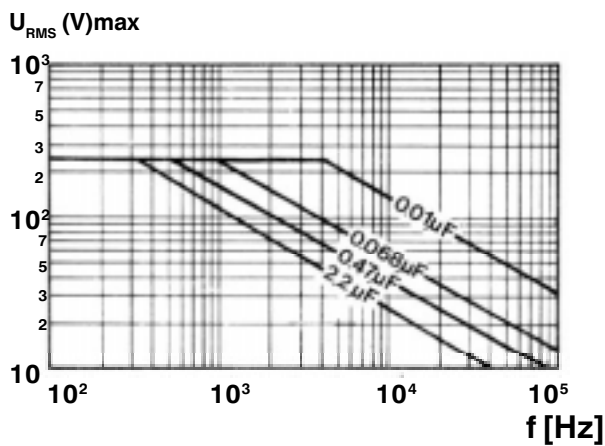

Rated RMS Voltage vs. frequency

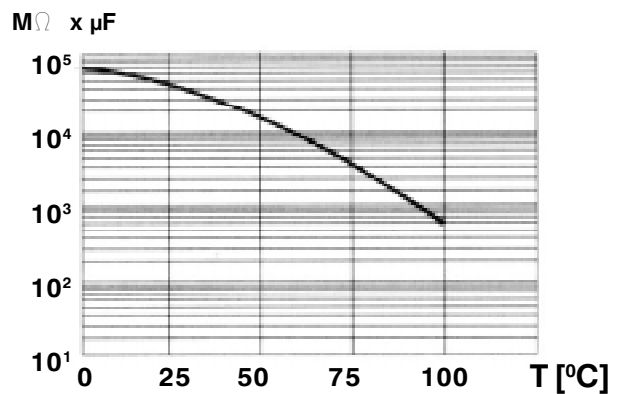


Time constant vs. temperature

METALLIZED POLYESTER FILM CAPACITORS

SELF-HEALING PROPERTIES

SCHEMATIC CROSS SECTION

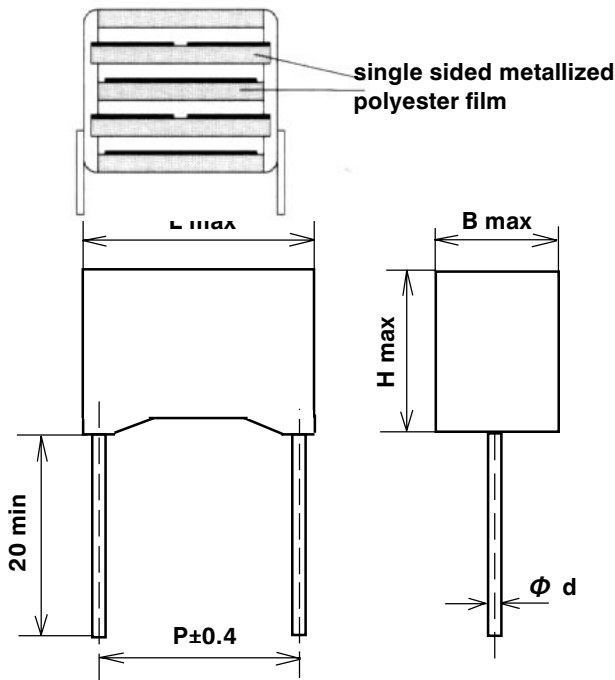

All dimensions are in mm

TYPICAL APPLICATIONS:

Interference suppression and „across-the-line“ and „line to ground“ applications. Suitable for use in situations where failure of the capacitor would not lead to danger of electric shock.

GENERAL TECHNICAL DATA

Dielectric: Polyester film (polyethylene terephthalate)
Plates: Metal layer deposited by evaporation under vacuum.
Winding: non-inductive type

Leads: Tinnet wire.

Protection: plastic case, epoxy resin filled. Box material is solvent resistant and flame retardant according to UL94 V0.

Marking: Manufacturer's logo, series, capacitance, tolerance, rated voltage, capacitor class, climatic category, passive flammability category, manufacturing date, approvals.

Climatic category: 40/110/56 IEC 60068-1

Operating temperature range: -40 to +110 °C

Related documents: IEC 384-14; EN 132400

ELECTRICAL CHARACTERISTICS

Capacitance range: $C_R = 0.0022 \mu F$ to $0.1 \mu F$
 Capacitance tolerance: $\pm 10\%$ (K); $\pm 20\%$ (M) at 1 kHz
 Rated voltage: $U_R = 250$ VAC; 50/60 Hz
 Test voltage: between terminals 2500VAC for 1s + 5000VDC for 1s at $25 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$
 Dissipation factor: $\text{tg } \delta \leq 100 \times 10^{-4}$ at $25 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ and 1kHz
 Insulation resistance at $25 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ and 100VDC - 1 min: $\geq 3 \times 10^4 \text{ M}\Omega$

Rated capacitance μF	Dimensions (mm)				
	B	H	L	P	max dv\dt at 350VDC
0.0022	5.0	11.0	13.0	10.0	500
0.0033	5.0	11.0	13.0	10.0	500
0.0047	5.0	11.0	13.0	10.0	500
0.0068	6.0	12.0	13.0	10.0	500
0.010	5.0	11.0	18.0	15.0	500
0.015	6.0	12.0	18.0	15.0	500
0.022	7.5	13.5	18.0	15.0	500
0.033	8.5	14.5	18.0	15.0	500
0.047	6.0	15.0	26.5	22.5	500
0.068	7.0	16.0	26.5	22.5	500
0.100	10.0	18.5	26.5	22.5	500

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions
 Temperature: $+ 40 \text{ }^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$
 Relative humidity (RH): $93\% \pm 2\%$
 Test duration: 56 days
 Performance
 Dielectric strength: no dielectric breakdown or flashover at 1500VAC/1min
 Capacitance change: $\Delta C/C \leq \pm 5\%$
 Insulation resistance: $\geq 50\%$ of initial limit

Endurance:

Test conditions
 Temperature: $+ 110 \text{ }^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$
 Test duration: 1000 h
 Voltage applied: $1.7 \times U_R + 1000 U_{AC}$ 0.1 s/h

Performance

Dielectric strength: no dielectric breakdown or flashover at 1500VAC/1min
 Capacitance change: $\Delta C/C \leq \pm 10\%$
 Insulation resistance: $\geq 50\%$ of initial limit

Resistance to soldering heat:

Test conditions
 Solder bath temperature: $+ 260 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$
 Dipping time (with heat screen): $10 \text{ s} \pm 1 \text{ s}$
 Performance
 Capacitance change: $\Delta C/C \leq \pm 2\%$

CAPACITORS MODULE

TYPICAL APPLICATIONS: Capacitors moduls are intended for use in ventilation and extraction systems for regulation of three motor speeds with capacitor switching.

PRINCIPLE OF OPERATION: By conecting the motor to a change-over switch, one capacitor circuit ot other is activated , producing different combinations of capacitance and reactance that result in three output levels.

GENERAL TECHNICAL DATA

WINDINGS: Non inductive type

DIELECTRIC: Polypropylene film

PLATES: Aluminium and Zn layer deposited by evaporation under vacuum.

CASE: Plastic materials self-extinguishing grade V0 according to UL 94 standard.

RESIN: Non polluting filling compound made of vegetable oil (non PCB) improving the protection of the winding and the functioning of the capacitor.

CONNECTOR: Polyamid UL 94 - V0 or Polypropylene UI 94 V0

DISCHARGE RESISTOR: 0,56 M Ω / 0,5 W - 2 pcs or 3 pcs

INTERNAL WIRES: stiff wires, copper - 0.75 mm²

ELECTRICAL CHARACTERISTICS

CAPACITANCE RANGE: C1=2 μ F - 4 μ F; C2=1 μ F - 5 μ F; C3=4 μ F; C_m = 1,5 μ F - 2 μ F

CAPACITANCE TOLERANCE: \pm 5%; \pm 10%

RATED VOLTAGE: for C1, C2 and C3: U_R = 250 VAC DB HPFNT

C_m: U_R = 400 VAC DB HPFNT

FREQUENCY: 50 Hz

TEST VOLTAGE: 2U_R for 2 s at 25 °C between terminals

CLIMATIC CATEGORY: -25/085/21 - HPF - DIN 40040

EXPECTED LIFE: 10000 h NT (Cl. B)

REFERENCE STANDARD: EN60252 - for motor run capacitors


Dimensions and capacitances values

Code	Capacitance (μ F)				Dimension
	250VDB HPFNT			400VDB HPFNT	H \pm 0.5
	C1	C2	C3	C _m	mm
61726730027	2	1		1,5	80
61726730045	2	1		2	80
61726730063	3	2		2	80
61726730081	2,5	2,5	4	2	111
61726730107	3,5	2,5		2	80
61726730125	4	1,5		2	80
61726730143	3	5		2	80
61726730161	4	4		2	80

Other capacitance s values on request

CAPACITORS MODULE

CONSTRUCTION AND DIMENSIONS

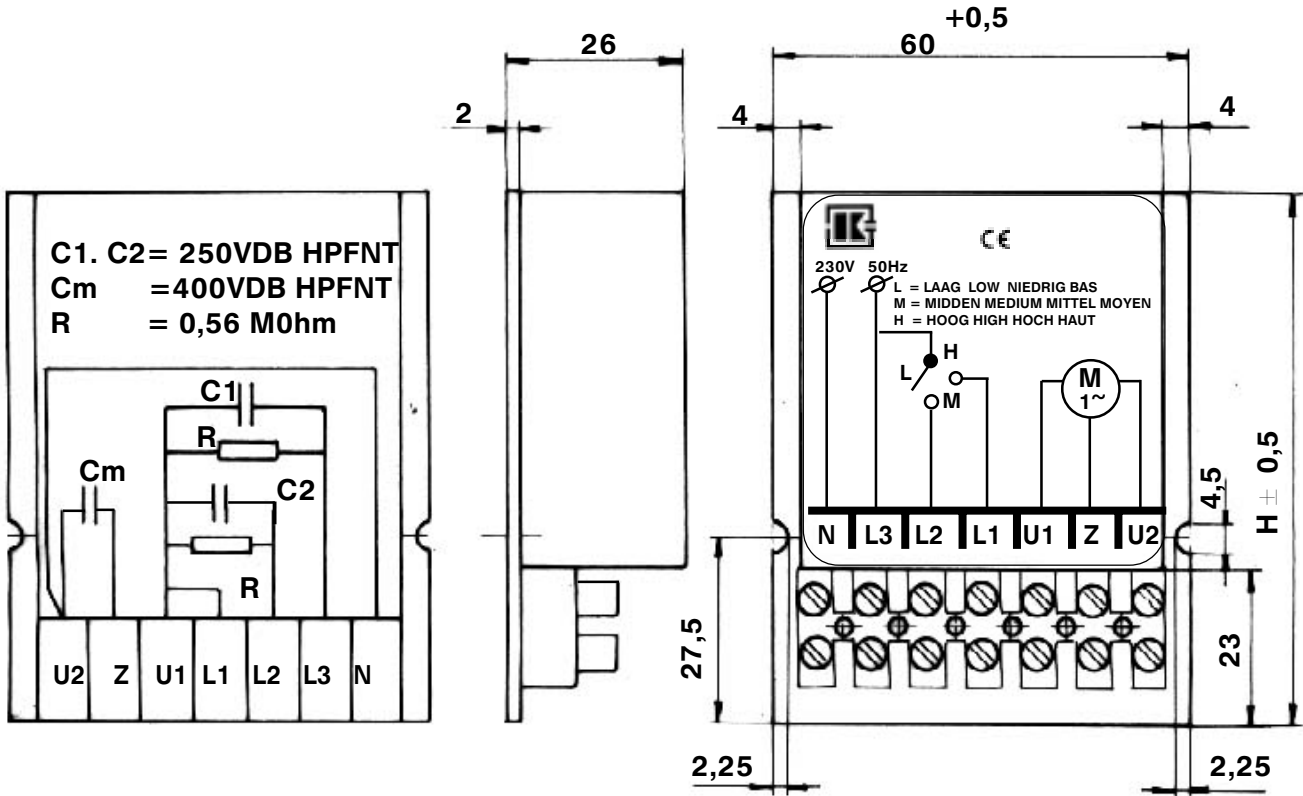

Internal connection diagram

External connection diagram