


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/25/06'		

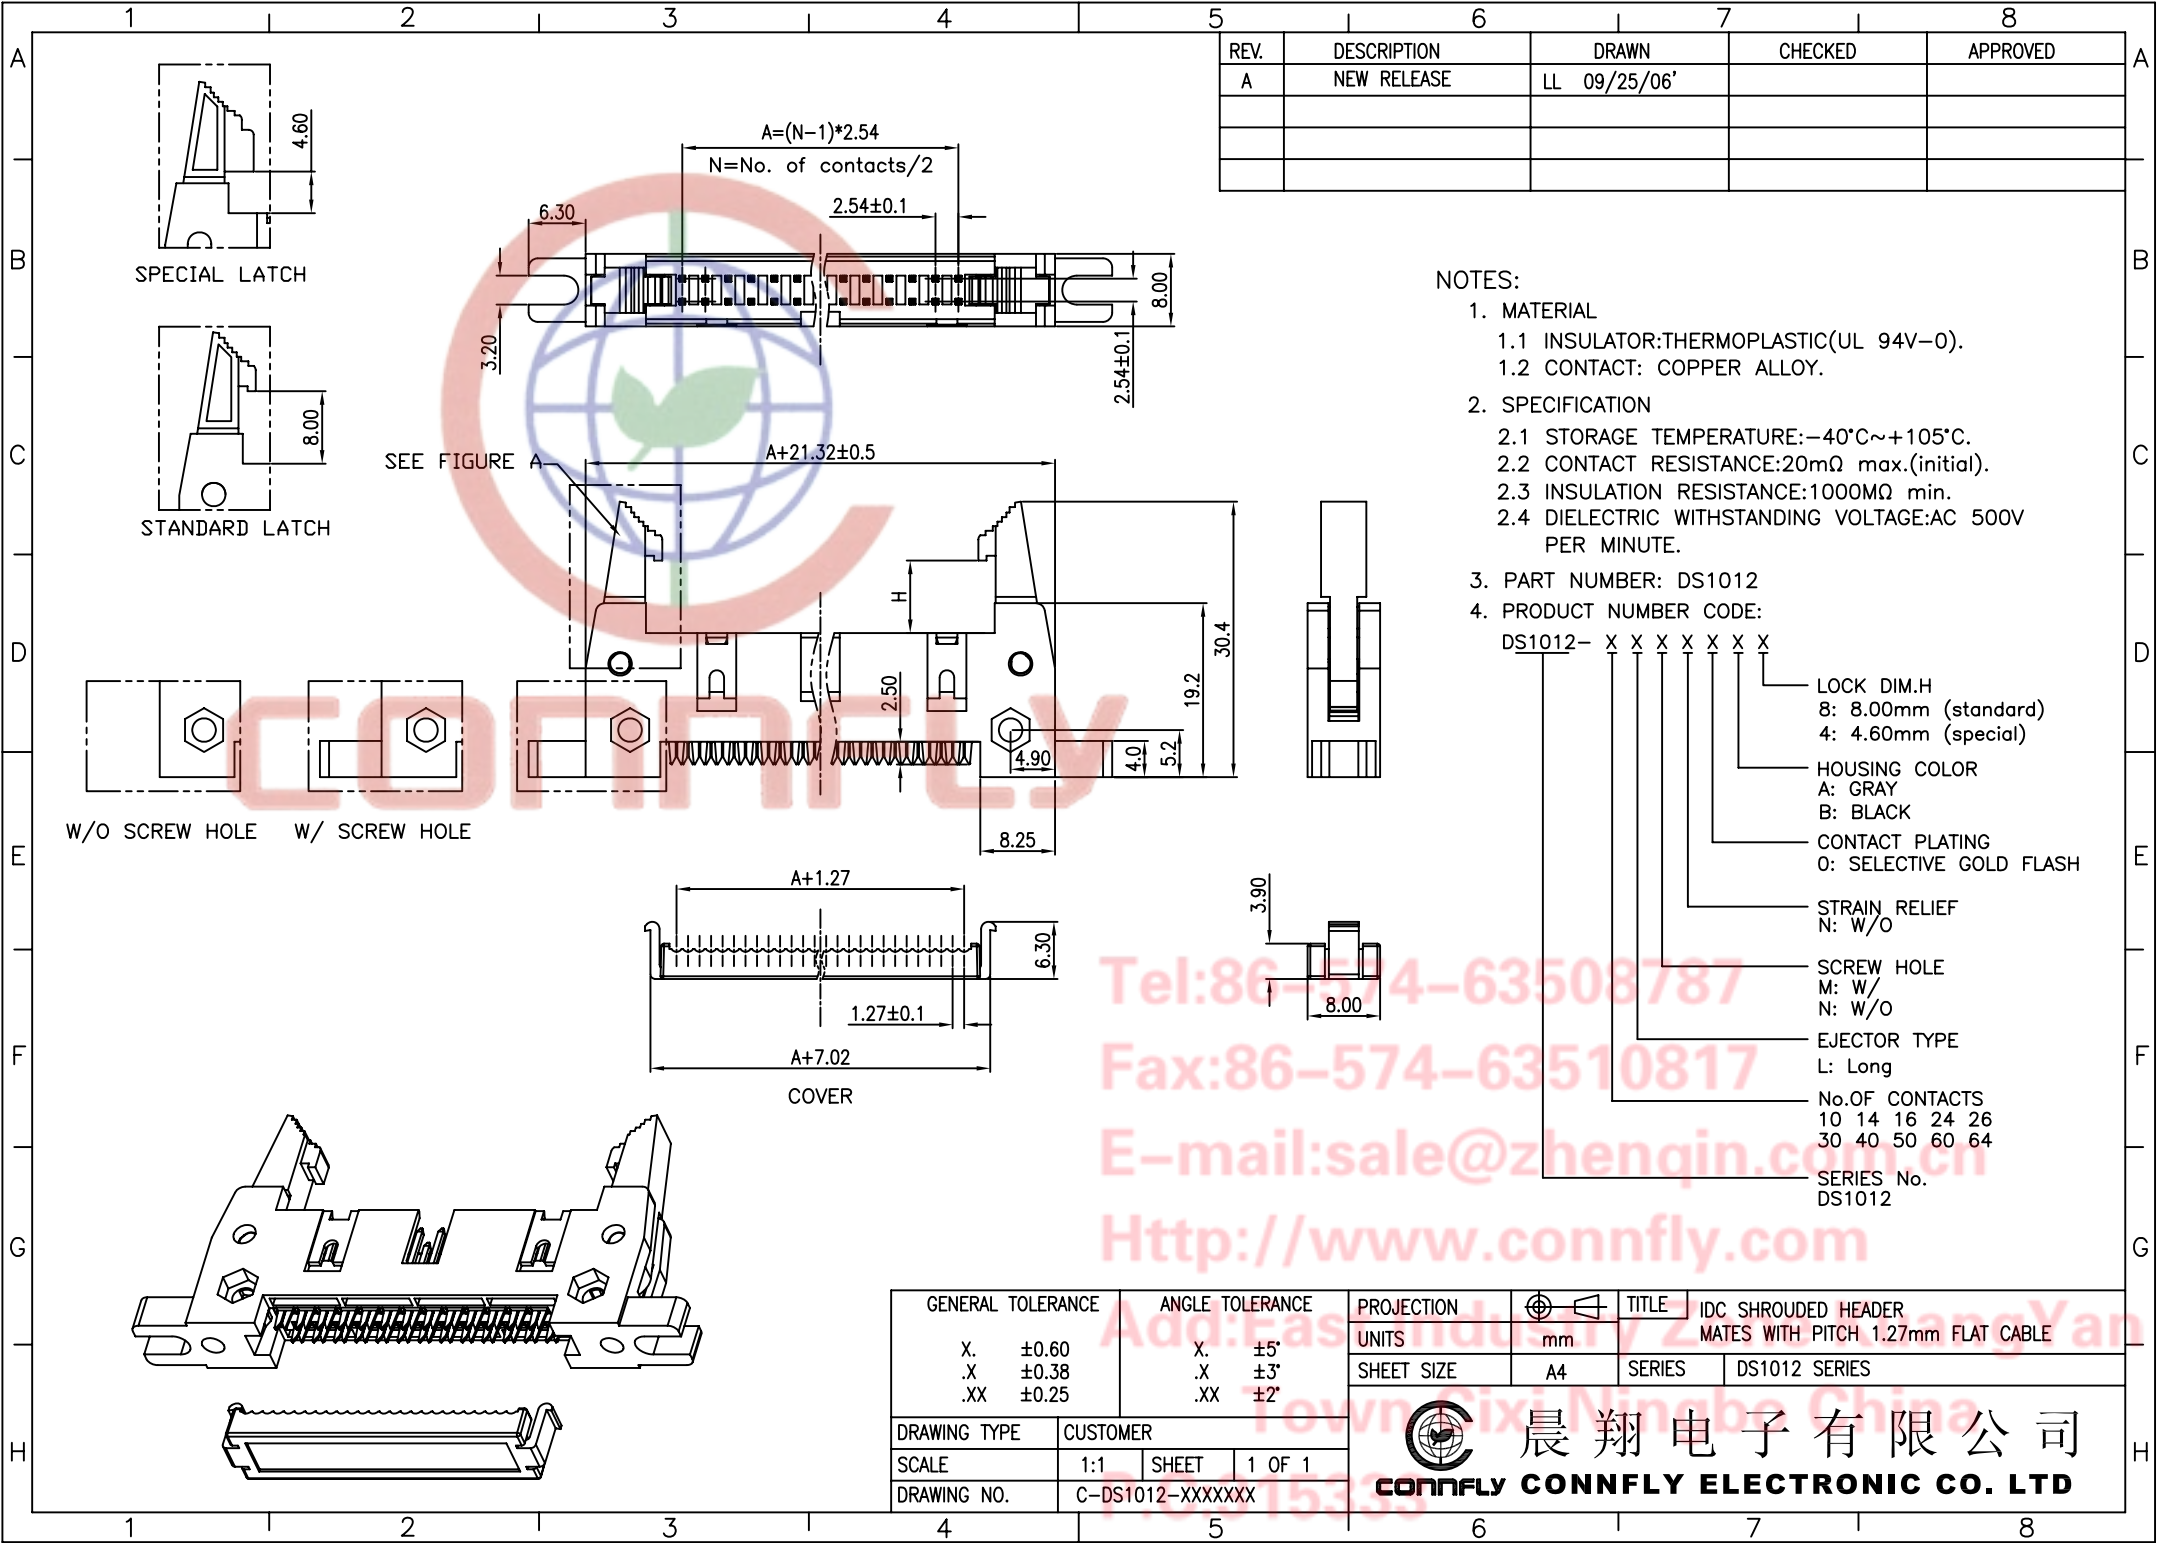

- NOTES:
- MATERIAL
 - INSULATOR: THERMOPLASTIC (UL 94V-0).
 - CONTACT: COPPER ALLOY.
 - SPECIFICATION
 - STORAGE TEMPERATURE: -40°C ~ +105°C.
 - CONTACT RESISTANCE: 20mΩ max. (initial).
 - INSULATION RESISTANCE: 1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
 - PART NUMBER: DS1012
 - PRODUCT NUMBER CODE:
 DS1012- X X X X X X
 LOCK DIM.H
 8: 8.00mm (standard)
 4: 4.60mm (special)
 HOUSING COLOR
 A: GRAY
 B: BLACK
 CONTACT PLATING
 0: SELECTIVE GOLD FLASH
 STRAIN RELIEF
 N: W/O
 SCREW HOLE
 M: W/
 N: W/O
 EJECTOR TYPE
 L: Long
 No. OF CONTACTS
 10 14 16 24 26
 30 40 50 60 64
 SERIES No.
 DS1012

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@zhengqin.com.cn
 Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	IDC SHROUDED HEADER		
.X	±0.60	.X	±5°	mm		MATES WITH PITCH 1.27mm FLAT CABLE		
.X	±0.38	.X	±3°		SHEET SIZE	A4	SERIES	
.XX	±0.25	.XX	±2°		DS1012 SERIES			
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
SCALE		1:1	SHEET					1 OF 1
DRAWING NO.		C-DS1012-XXXXXXX						