REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/21/08'	~	

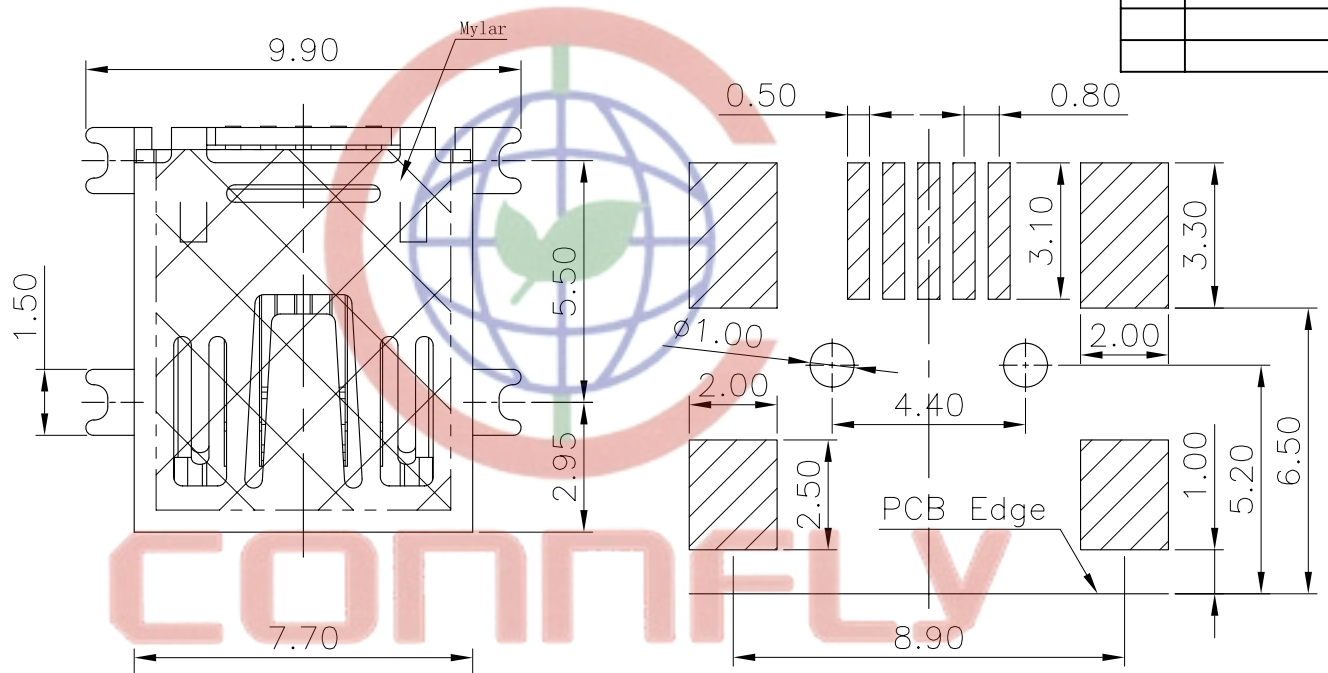

NOTES:
1. SPECIFICATIONS
   1.1 CONTACT RESISTANCE:50mΩ Max.
   1.2 INSULATOR RESISTANCE:100MΩ Min.
   1.3 DIELECTRIC STRENGTH:100VAC FOR 1 Minute.
   1.4 DURABILITY:5000
2. PRODUCT NUMBER CODE:
   DS1104 – X X X X X
   - PACKING TYPE: R:TAPE ON REEL; B:TUBE
   - MYLAR SUPPORT: S:W/ MYLAR; X:W/O MYLAR
   - CONTACT PLATING: 0: SELECTIVE GOLD FLASH; C: SELECTIVE 3u" GOLD
   - SHELL PLATING: N: NICKEL; 6: TIN; 8: FULL GOLD
   - COLOR OF HOUSING: B: BLACK

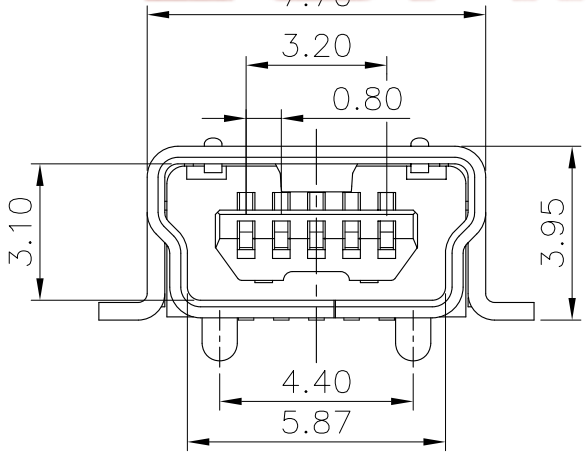

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

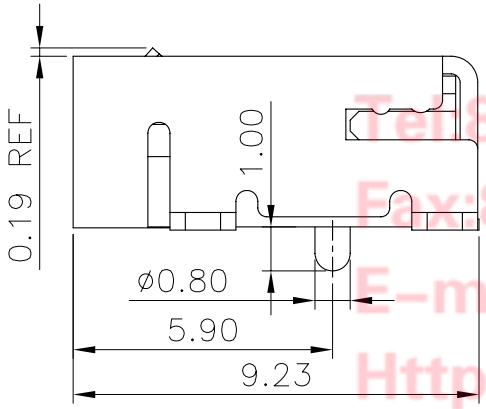

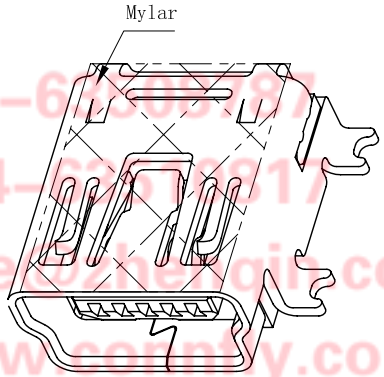

CONNFLY
Tel:86-574-6[illegible]97
Fax:86-574-6[illegible]817
E-mail:sale@[illegible]com.cn
Http://www.connfly.com
Add:East Industry Zone KuangYan Town CiXi Ningbo China
315[illegible]

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	MINI USB
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1104 SERIES
DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1104-XXXXX		

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD