


CA23 Series Flat Cable - IDC DIP Plug


2.54mm(.100") Center Spacing

● Can be used CW03 1.27mm(.050") Center Spacing ribbon cable


RoHS Compliant



UL **UL**:E159616

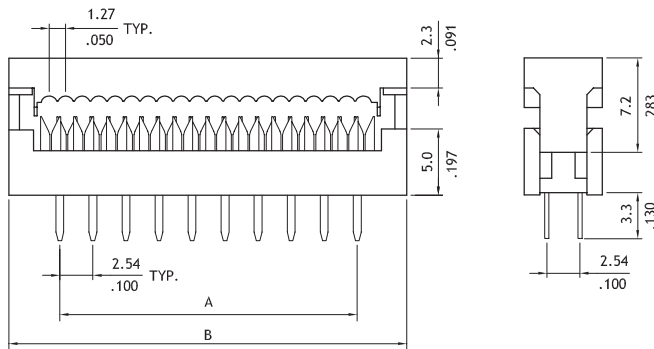

Circuits	Dimension	
	A	B
8	7.62(.300)	15.5(.610)
10	10.16(.400)	18.0(.709)
14	15.24(.600)	23.1(.909)
16	17.78(.700)	25.6(1.008)
20	22.86(.900)	30.7(1.209)
24	27.94(1.100)	35.8(1.409)
26	30.48(1.200)	38.3(1.508)
30	35.56(1.400)	43.4(1.709)
34	40.64(1.600)	48.5(1.909)
40	48.26(1.900)	56.1(2.209)
50	60.96(2.400)	68.8(2.709)
60	73.66(2.900)	81.5(3.209)
64	78.74(3.100)	86.6(3.409)



Recommended P.C. Board Layout

Ordering Code

1 **2** **3** **4** **5** **6**
CA23 64 P A 1 00

- ① Series No.
- ② No. of Circuits: See drawing
- ③ Contact Type: P= Plug
- ④ Plating code:

A= Selective Gold flash over Nickel
 *Optional plating available but MOQ requested

- ⑤ Color: 1= Black
- ⑥ Other options:
 00= Standard
 *Special options Consult manufacturer