CB50 Series Dual Row Female Header

1.27mm(.050") Center spacing



◎ Ultra Low profile
◎ Top and Bottom entry available
◎ High performance contact design
◎ Mates with CH51,CH52, CH53,CH57 and CHC2 Connectors

RoHS Compliant

P/N	CB50**20**0	◎ Without Peg

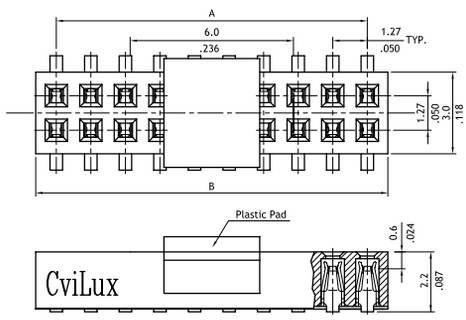

DIM. A = 1.27 X No. of Spaces
DIM. B = DIM. A + 1.67





Recommended P.C. Board Layout

P/N	CB50**2P**0	◎ With Pegs Type 1

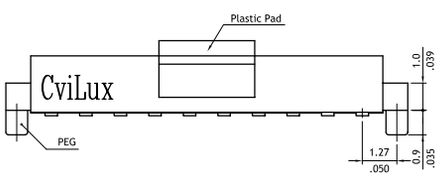



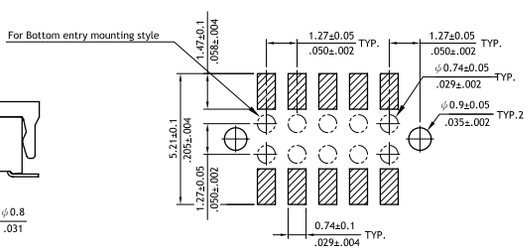

Recommended P.C. Board Layout

P/N	CB50**2A**0	◎ With Pegs Type 2

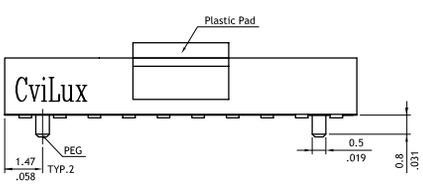





Recommended P.C. Board Layout

Ordering Code

❶	❷	❸	❹	❺	❻	❼
CB50	40	2	0	0	T	0

❶ Series No.
❷ Circuits:
06 to 100
100= X1

❸ Plating code:
2= Gold flash over Nickel plated
*Optional plating available but MOQ requested

❹ Type:
0= Without Peg , P= With Pegs Type1
A= With Pegs Type2

❺ 0= Without Pick & Place Pad
P= With Pick & Place Pad

❻ Packing:
T= Tube Packing , R= Tape & Reel

❼ Other Options: 0= Standard
*Special options consult manufacturer