

CS51 Series 2.54mm(.100") ISA Slot Connector


- ⊙ With standoff to prevent flux wicking
- ⊙ With kinked tails to secure connector while soldering process
- ⊙ Options key available
- ⊙ Polarizing slot construction



Construction-

- ⊙ Insulation: Glass filled polyester UL 94V-0
- ⊙ Contact material: Brass


P/N CS51098A1K0

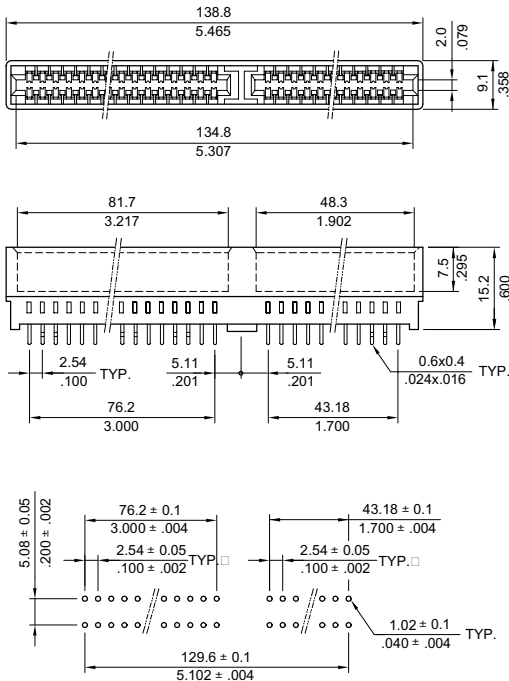

Recommended P.C. Board Layout

P/N CS51***A1K0

Circuits	Dimension		
	A	B	C
36	43.18(1.700)	52.0(2.047)	48.3(1.902)
62	76.2(3.000)	85.2(3.354)	81.3(3.201)
120	149.86(5.900)	158.8(6.252)	155.0(6.102)

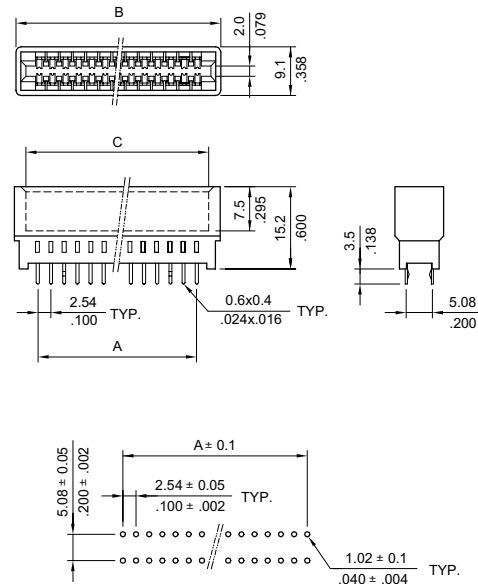

Recommended P.C. Board Layout

Ordering Code

① CS 51 ② 098 ③ A ④ 1 ⑤ K0

① Series No.

② Circuits:
036, 062, 098 and 120

③ Plating code:

A= Selective Gold flash over Nickel

④ Color: 1= Black

⑤ Other options:

K0= Pin kinked (Standard)

*Special option Consult manufacturer