

• **Material**


Pin header : Brass, Tin plated  
 Housing : PA66,UL94V-0

• **Electrical**

Rated voltage : 300V  
 Rated current : 8A  
 Contact resistance : 20mΩ  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding voltage: AC1500V/1Min

• **Mechanical**

Temp.Range : -40°C~+130°C  
 MAX Soldering: +250°C ,for 5 Sec.

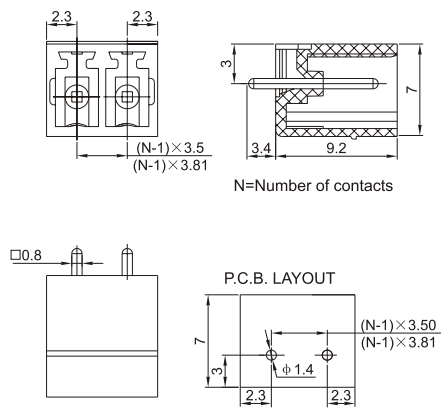

Pitch:3.5mm,3.81mm