


认证/Approval:    



DG□H-0

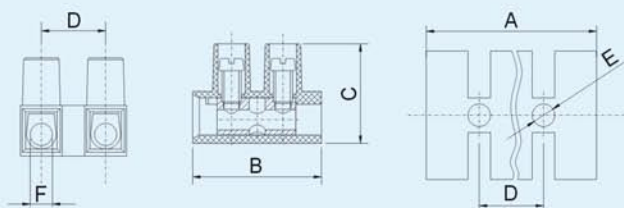

型号 Model	线径 mm ²	安培 Amp	电压 Volt.	螺丝 Screw	尺寸 Dimensions (mm/in.)						
					Unit	A	B	C	D	E	F
DG8H-0	1.5	17.5A	450V	M2.6X5	(mm)	93.5	17.8	13.3	8.00	3.00	2.80
DG10H-0	2.5	24A	450V	M3.0X6	(mm)	116.5	20.0	15.5	10.00	3.50	3.30
DG12H-0	6.0	41A	750V	M3.5X7	(mm)	140.7	23.80	17.8	12.00	3.90	3.90
DG14H-0	10.0	57A	750V	M4X9	(mm)	158.0	25.60	24.0	13.50	4.40	4.80
DG16H-0	16.0	76A	750V	M4X9	(mm)	169.8	28.80	21.8	14.50	4.20	6.00
DG18H-0	25.0	101A	750V	M5X11	(mm)	194.4	38.90	27.5	16.50	4.20	7.50

型号:DG□H-0


底部: 平底型
材质: 尼龙66, UL94V-2
温度: 110°C
接线排数: 2-12排

Model:DG□H-0

Base:Flat-bottom
Housing material PA66,UL94V-2
Working temperature:110°C
Poles available:2-12poles



DG□H-1.2

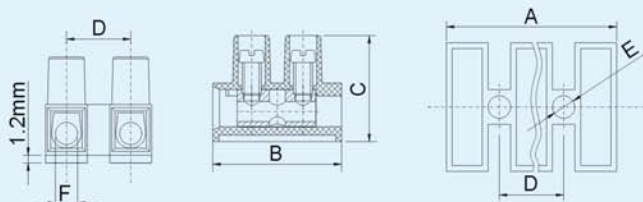

型号 Model	线径 mm ²	安培 Amp	电压 Volt.	螺丝 Screw	尺寸 Dimensions (mm/in.)						
					Unit	A	B	C	D	E	F
DG8H-1.2	1.5	17.5A	450V	M2.6X5	(mm)	93.5	17.8	14.50	8.00	3.00	2.80
DG10H-1.2	2.5	24A	450V	M3.0X6	(mm)	116.5	20.0	16.70	10.00	3.50	3.30
DG12H-1.2	6.0	41A	750V	M3.5X7	(mm)	140.7	23.80	19.00	12.00	3.90	3.90
DG14H-1.2	10.0	57A	750V	M4X9	(mm)	158.0	25.60	25.20	13.50	4.40	4.80
DG16H-1.2	16.0	76A	750V	M4X9	(mm)	169.8	28.80	23.00	14.50	4.20	6.00
DG18H-1.2	25.0	101A	750V	M5X11	(mm)	194.4	38.90	28.70	16.50	4.20	7.50

型号:DG□H-1.2


底部: H型底部抬高1.2mm
材质: 尼龙66, UL94V-2
温度: 110°C
接线排数: 2-12排

Model:DG□H-1.2

Base:With 1.2mm elevated base
Housing material PA66,UL94V-2
Working temperature:110°C
Poles available:2-12poles



DG□H-4.3

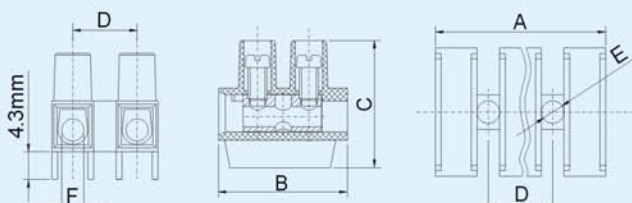

型号 Model	线径 mm ²	安培 Amp	电压 Volt.	螺丝 Screw	尺寸 Dimensions (mm/in.)						
					Unit	A	B	C	D	E	F
DG8H-4.3	1.5	17.5A	450V	M2.6X5	(mm)	93.5	17.80	17.6	8.00	3.00	2.80
DG10H-4.3	2.5	24A	450V	M3.0X6	(mm)	116.5	20.00	19.8	10.00	3.50	3.30
DG12H-4.3	6.0	41A	750V	M3.5X7	(mm)	140.7	23.80	22.1	12.00	3.90	3.90
DG14H-4.3	10.0	57A	750V	M4X9	(mm)	158.0	25.60	28.3	13.50	4.40	4.80
DG16H-4.3	16.0	76A	750V	M4X9	(mm)	169.8	28.80	26.1	14.50	4.20	6.00
DG18H-4.3	25.0	101A	750V	M5X11	(mm)	194.4	38.90	31.8	16.50	4.20	7.50

型号:DG□H-4.3

底部: H型底部抬高4.3mm
材质: 尼龙66, UL94V-2
温度: 110°C
接线排数: 2-12排

Model:DG□H-4.3

Base:With 4.3mm elevated base
Housing material PA66,UL94V-2
Working temperature:110°C
Poles available:2-12poles