

# DG45 300V 25A 9.5Pitch


## Materials

Housing: PA66, UL94V-0  
 Terminal: Brass, 0.8t, Tin-Plated  
 Screw: Steel, M4 Ni-Plated

## Capability

Rated: 300V/25A  
 Temp. Range: -40°C ~ +105°C  
 Withstand Voltage: AC2000V/Min  
 Insulation Resistance: 500MΩ / DC500V  
 Wire Range: 22 ~ 12AWG  
 Max. Torque Value: 10kg/cm

## HOW TO ORDER

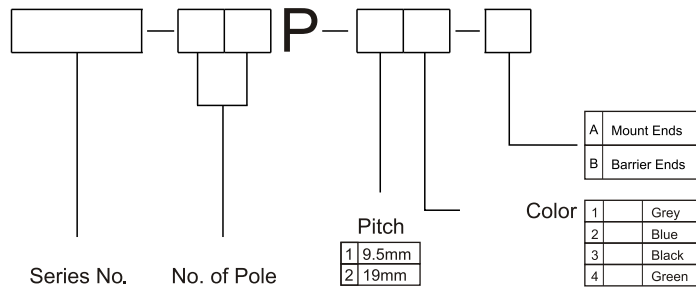

**DG45C**

