




DEGSON ELECTRONICS CO., LTD.

Product Specification

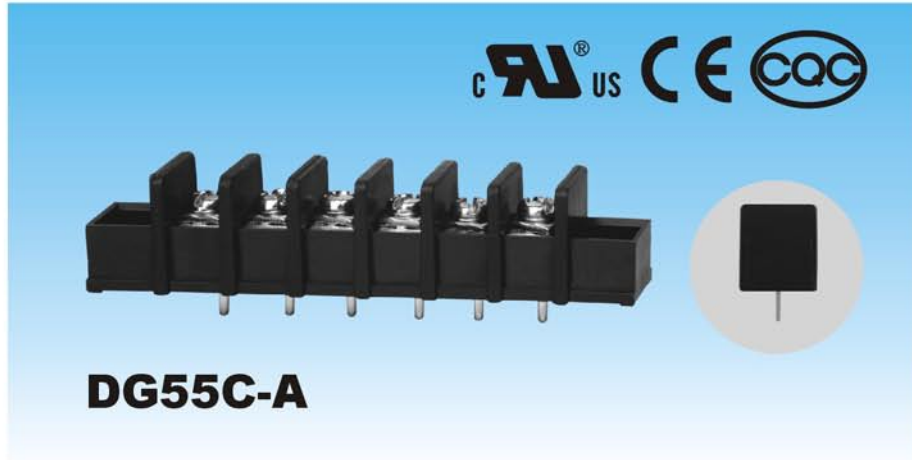


Materials

Housing:	PA66,UL94V-0
Terminal:	Brass,0.8t,Tin-Plated
Screw:	Steel,M4 Ni-Plated

Capability

Rated:	300V / 20A
Temp.Range:	-40°C~+105°C
Withstand Voltage:	AC2000V / 1Min
Insulation Resistance:	500MΩ / DC500V
Wire Range:	22-12AWG
Max.Torque Value:	1.2N.m 10.6Lb.in

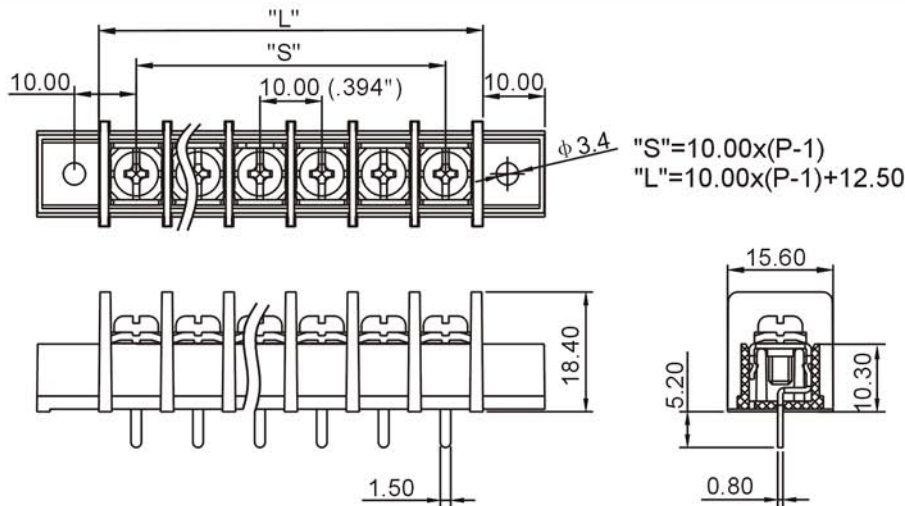

HOW TO ORDER:



Series No. No. of Pole

Color

1 Gray	5 Orange	9 White
2 Blue	6 Red	
3 Black	7 Trans-parent	
4 Green	8 Yellow	


Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	22.50	32.50	42.50	52.50	62.50	72.50	82.50	92.50	102.50	112.50	122.50	132.50	142.50	152.50
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	162.50	172.50	182.50	192.50	202.50	212.50	222.50	232.50	242.50	252.50	262.50			
S(mm)	150.00	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	240.00	250.00			

	DEGSON ELECTRONICS CO.,LTD.
	NAME DG55C-A



DEGSON ELECTRONICS CO., LTD.

Product Specification



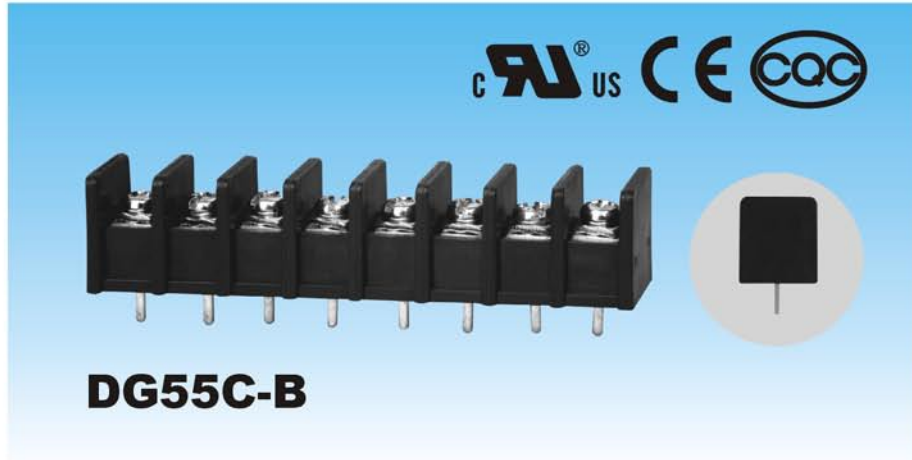


Materials

Housing:	PA66,UL94V-0
Terminal:	Brass,0.8t,Tin-Plated
Screw:	Steel,M4 Ni-Plated

Capability

Rated:	300V / 20A
Temp.Range:	-40°C~+105°C
Withstand Voltage:	AC2000V / 1Min
Insulation Resistance:	500MΩ / DC500V
Wire Range:	22-12AWG
Max.Torque Value:	1.2N.m 10.6Lb.in

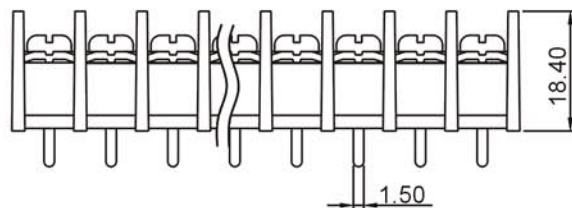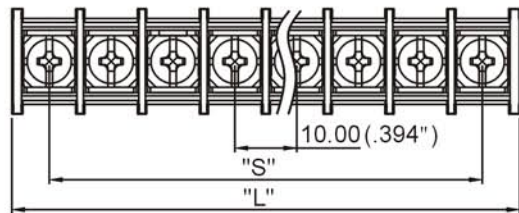

HOW TO ORDER:



Series No. No. of Pole

Color

1 Gray	5 Orange	9 White
2 Blue	6 Red	
3 Black	7 Trans-parent	
4 Green	8 Yellow	

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	22.50	32.50	42.50	52.50	62.50	72.50	82.50	92.50	102.50	112.50	122.50	132.50	142.50	152.50
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	162.50	172.50	182.50	192.50	202.50	212.50	222.50	232.50	242.50	252.50	262.50			
S(mm)	150.00	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	240.00	250.00			



DEGSON ELECTRONICS CO.,LTD.

NAME

DG55C-B