DEGSON ELECTRONICS CO., LTD.

Product Specification

DG58C-B

Approval		
Electrical		
Standard	**UL**	**IEC**
Rated voltage	300V	750V
Rated current	20A	32A
Wire range	22-12AWG	4.0㎟
With standing voltage	AC3000V/1Min	
Insulation Resistance	500MΩ/DC500V	
Mechanical		
Max. Torque Value	1.2N.m 10.6Lb.in	
Ambient temperature	-40℃~+105℃	
Dimensions		
Pitch	10.0mm(.394″)	
Poles	2P-22P	
Material		
Housing	PA66+23%GF,UL94V-0	
Terminal	Brass,0.8t Tin plated	
Screws	Steel,M4 Ni plated	

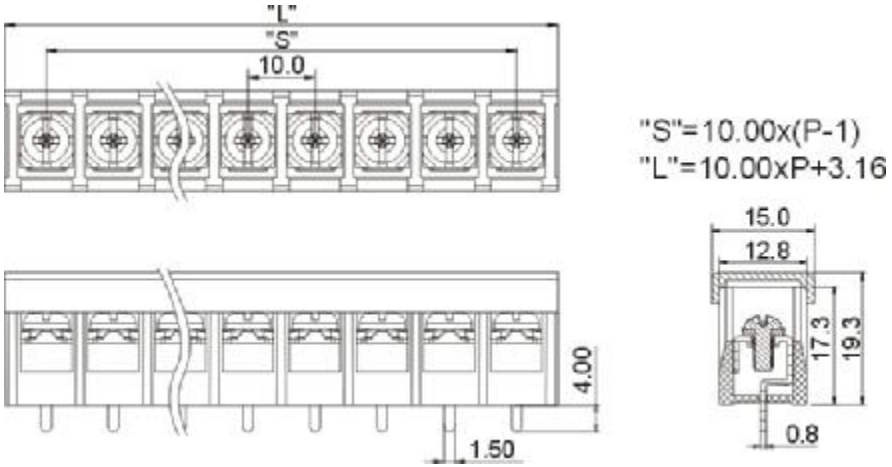

"S"=10.00x(P-1)
"L"=10.00xP+3.16

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	23.16	33.16	43.16	53.16	63.16	73.16	83.16	93.16	103.16	113.16	123.16	133.16	143.16	153.16
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00

Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	163.16	173.16	183.16	193.16	203.16	213.16	223.16	233.16	243.16	253.16	263.16			
S(mm)	150.00	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	240.00	250.00			

HOW TO ORDER :

DG58 □ — □ — □ □ **P** — **1** □ — X X X (**Customer Request**)

- □ (after DG58): C: H: S: R:
- □ (after —): **A** Mount Ends; **B** Barrier Ends
- □ □ (after —): **NO. of Pole**
- **1** □ (after P —): **Color** — 1 Grey; 3 Black; 4 Green

mm (INCH)		DEGSON	DEGSON ELECTRONICS CO., LTD.
THIRDANGLE PROJECTION		NAME	DG58C-B