


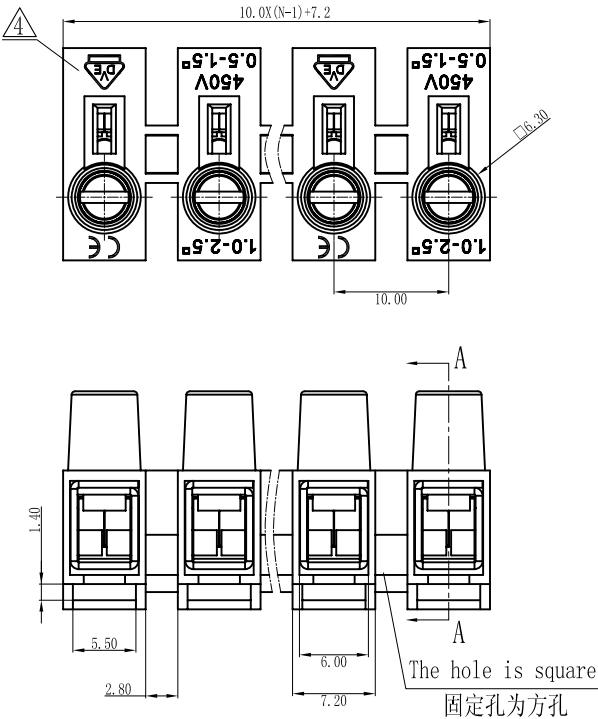
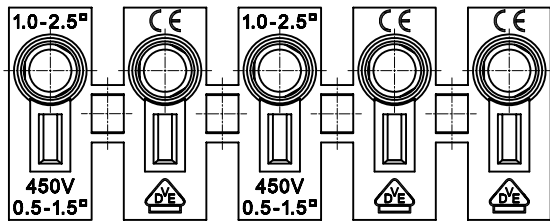





(2XX+1)P 时
最后两线刻字相同

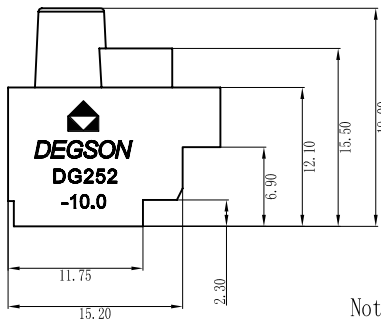

(2XX)P 时
最后两线刻字不同

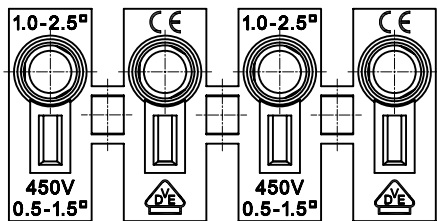

Section A-A

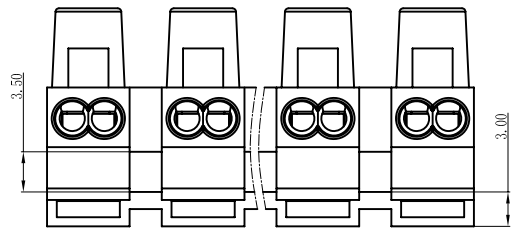

- Notes:
1. Pitch: 10.0mm, Poles: 2-12P
 2. Rated voltage/current: UL1059 300V/10A
VDE 450V/17.5A
 3. Operation temperatures: -40°C ~ +105°C
 4. Withstanding Voltage: AC2000V/1min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: Screwless 0.5~1.5mm² 22~16AWG
Screw 1.0~2.5mm²
 7. Max. Torque Value: M3.5, 4.08kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	—

3	DG252-Cage	X000001070 (H)	XX	Steel	Cr ³⁺ Zn	
2	DG252-Screw M3.5	S000000890 (H)	XX	Steel	Cr ³⁺ Zn	
1	DG252 Housing	2004A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	← MM (INCH) →		DFTO LITUM	DATE 03/29/06"		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
			MATERIAL :			
	ANGLES ± 1°		G.E :			
	THIRD ANGLE PROJECTION		FINISH :			
			SCALE : 1:1			
 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG252-XXP-1Y-00A (H) DRAWING NO. DG252-E01 SIZE A3 REV T4 08/27/09 D/PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1						