


DG801-1 DG801-2 DG801-3  
 DG801-4 DG801-5

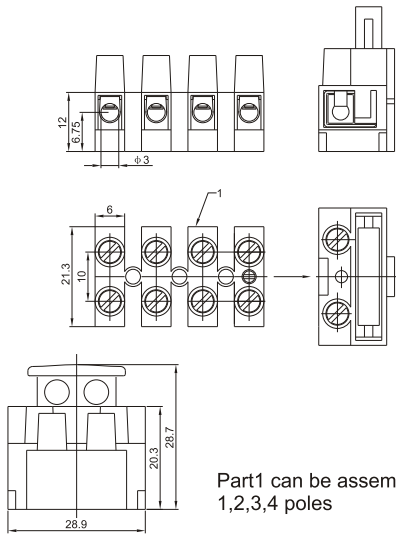

● **Material**

Screws : M3 steel Zinc plated  
 Contact : Phospor Bronze  
 Housing : PA66, UL94V-0

● **Electrical**

Rated voltage : 250V  
 Rated current : 10A  
 Contact resistance : 20m $\Omega$   
 Insulation resistance: 5000M $\Omega$ /1000V  
 Withstanding voltage: AC1500V/1Min  
 Wire range : 22-14AWG 2.5mm<sup>2</sup>

● **Mechanical**

Temp.Range : -40°C~+105°C  
 MAX Soldering: +250°C ,for 5 Sec.  
 Torque : 0.5Nm(4.5lb.in)  
 Strip length : 6-7mm