



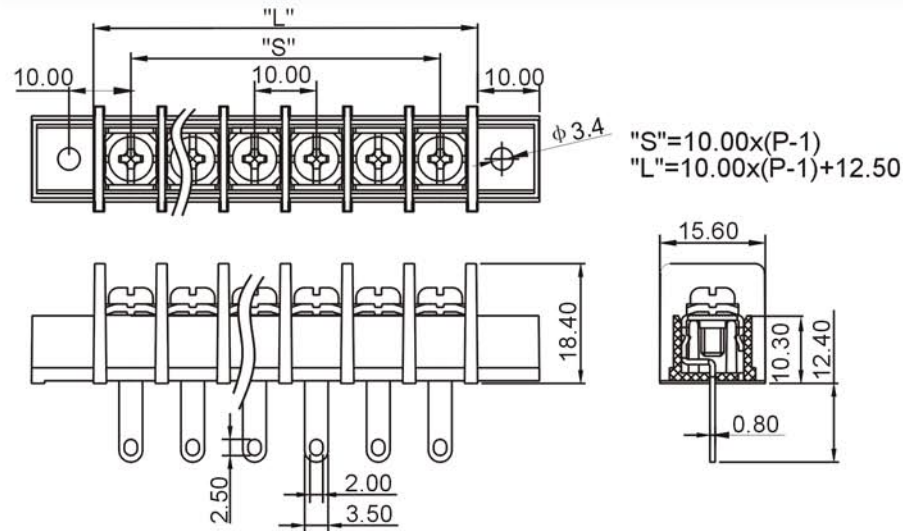

DEGSON ELECTRONICS CO., LTD.

Product Specification

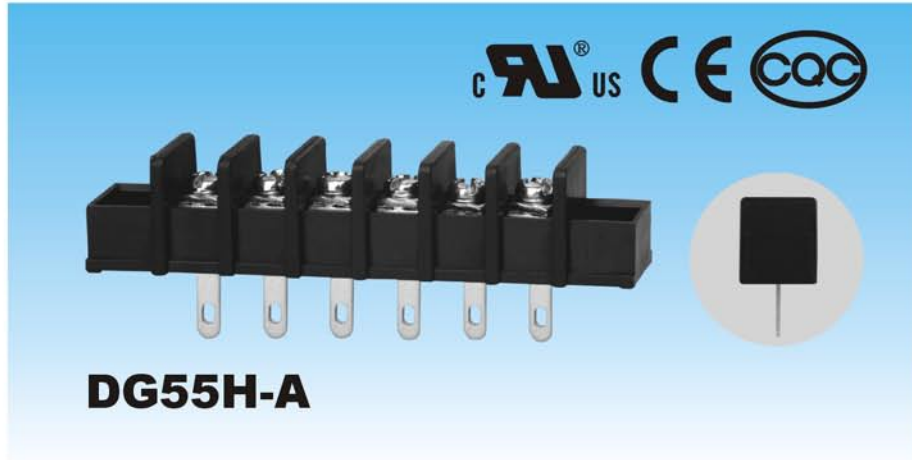

| | | | | | | | | | | | | | | |
|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Poles | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| L(mm) | 22.50 | 32.50 | 42.50 | 52.50 | 62.50 | 72.50 | 82.50 | 92.50 | 102.50 | 112.50 | 122.50 | 132.50 | 142.50 | 152.50 |
| S(mm) | 10.00 | 20.00 | 30.00 | 40.00 | 50.00 | 60.00 | 70.00 | 80.00 | 90.00 | 100.00 | 110.00 | 120.00 | 130.00 | 140.00 |
| Poles | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | |
| L(mm) | 162.50 | 172.50 | 182.50 | 192.50 | 202.50 | 212.50 | 222.50 | 232.50 | 242.50 | 252.50 | 262.50 | | | |
| S(mm) | 150.00 | 160.00 | 170.00 | 180.00 | 190.00 | 200.00 | 210.00 | 220.00 | 230.00 | 240.00 | 250.00 | | | |

Materials

| | |
|-----------|-------------------------|
| Housing: | PA66, UL94V-0 |
| Terminal: | Brass, 0.8t, Tin-Plated |
| Screw: | Steel, M4 Ni-Plated |

Capability

| | |
|------------------------|------------------------|
| Rated: | 300V / 20A |
| Temp. Range: | -40°C ~ +105°C |
| Withstand Voltage: | AC2000V / 1Min |
| Insulation Resistance: | 500M Ω / DC500V |
| Wire Range: | 22-12AWG |
| Max. Torque Value: | 1.2N.m 10.6Lb.in |

HOW TO ORDER:



Series No. No. of Pole

Color

| | | |
|---------|----------------|---------|
| 1 Gray | 5 Orange | 9 White |
| 2 Blue | 6 Red | |
| 3 Black | 7 Trans-parent | |
| 4 Green | 8 Yellow | |



DEGSON ELECTRONICS CO., LTD.

NAME

DG55H-A