

WIRE TO P.C.B. TYPE TERMINAL BLOCK

ETB 54 SERIES (MOUNT TYPE/BARRIER TYPE)

PITCH=7.62mm (0.3inch)

UL E133988(R) LR100420

FEATURES

- Can be supplied in any number of positions
- Special wire protector design to ensure reliable wire clamping
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Wide choice of pitch & terminal

SPECIFICATIONS

- Pitch: 7.62mm(0.3inch)
- Wire range: 16AWG to 22AWG
- Rated: 10Amp, 300VAC
- Housing material:
Thermoplastic (UL 94V-0) Black
- Terminals: Tin plated over Brass
- Screws: Nickel plated over Steel
- Dielectric strength: 2000VAC (Min.)
- Insulation resistance: 1000M Ω , 500VDC




PART NUMBERING SYSTEM

ETB	54	01	1	02	XX	X
						+---
						Z:Sn Plated (lead free)
						+---
						Special number
						+---
						Number of pole
						+---
						Housing type
						1:Mount type
						2:Barrier type
						+---
						Terminal type
						+---
						Series
						+---
						Model

DRAWING (MOUNT TYPE)


DIMENSIONS UNIT:mm(inch)

ETB54001** SERIES

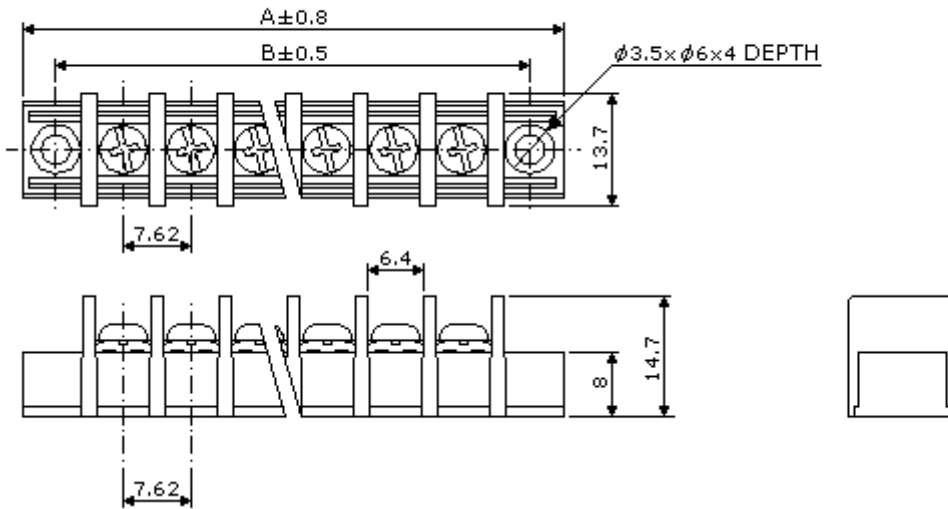


DIMENSIONS UNIT:mm(inch)

ETB54011** SERIES

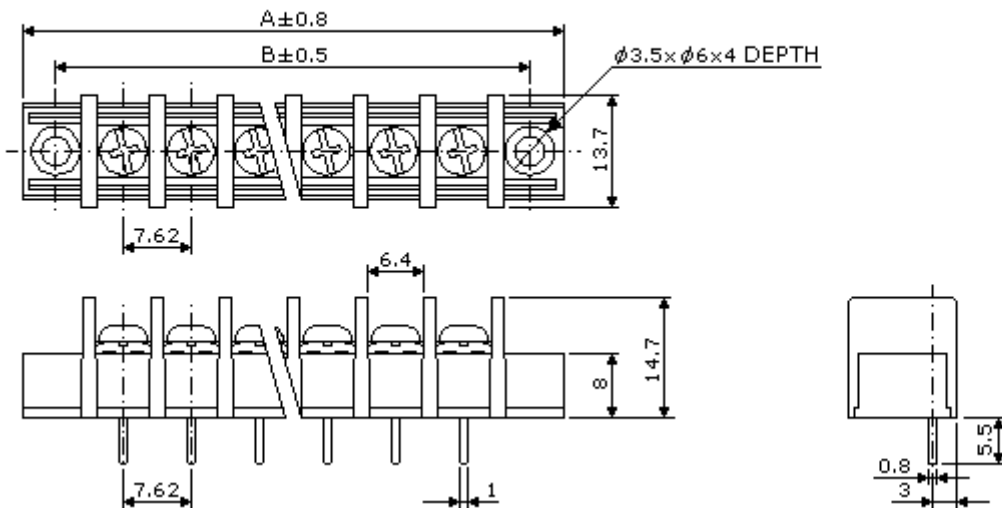


DIMENSIONS UNIT:mm(inch)

ETB54021** SERIES

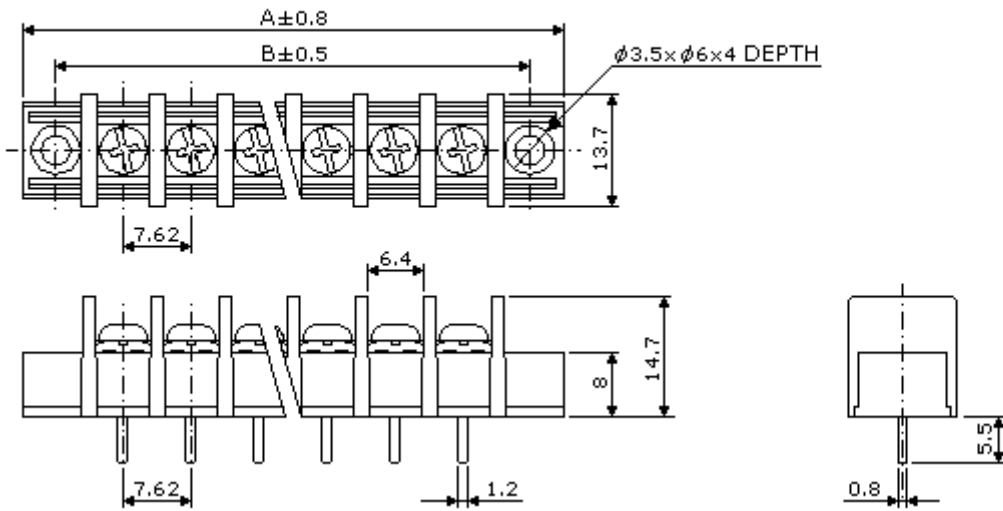


DIMENSIONS UNIT:mm(inch)

ETB54031** SERIES

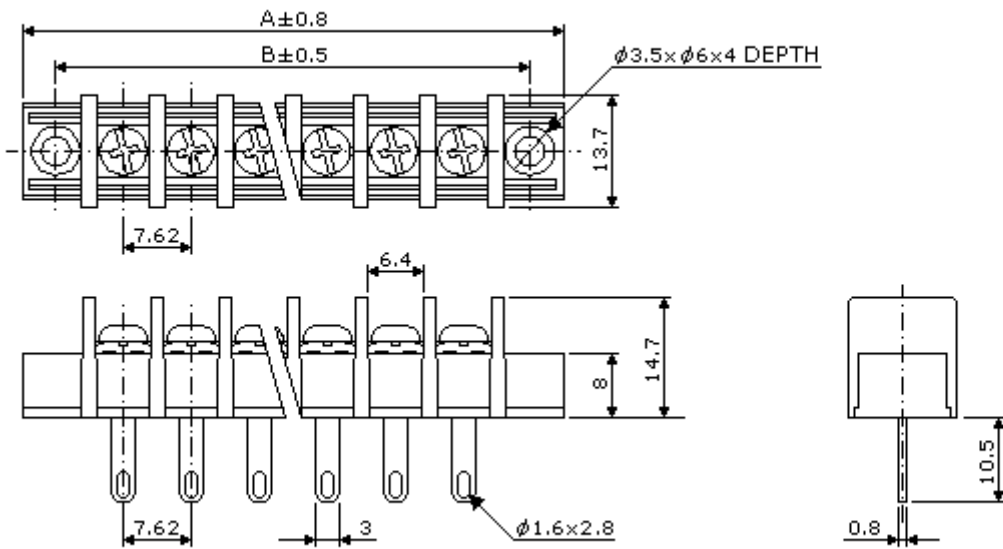


DIMENSIONS UNIT:mm(inch)

ETB54041** SERIES

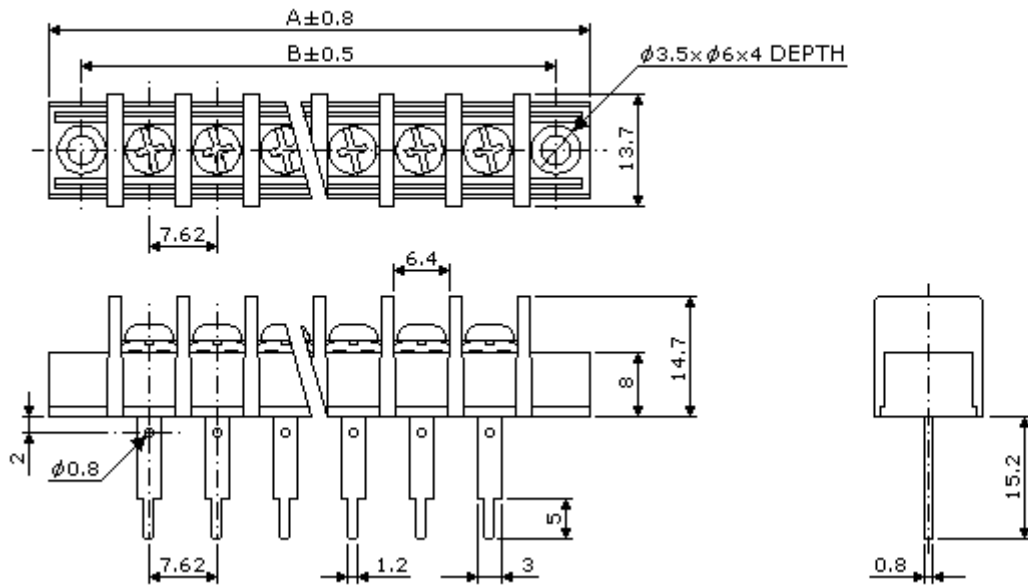


DIMENSIONS UNIT:mm(inch)

ETB54051** SERIES

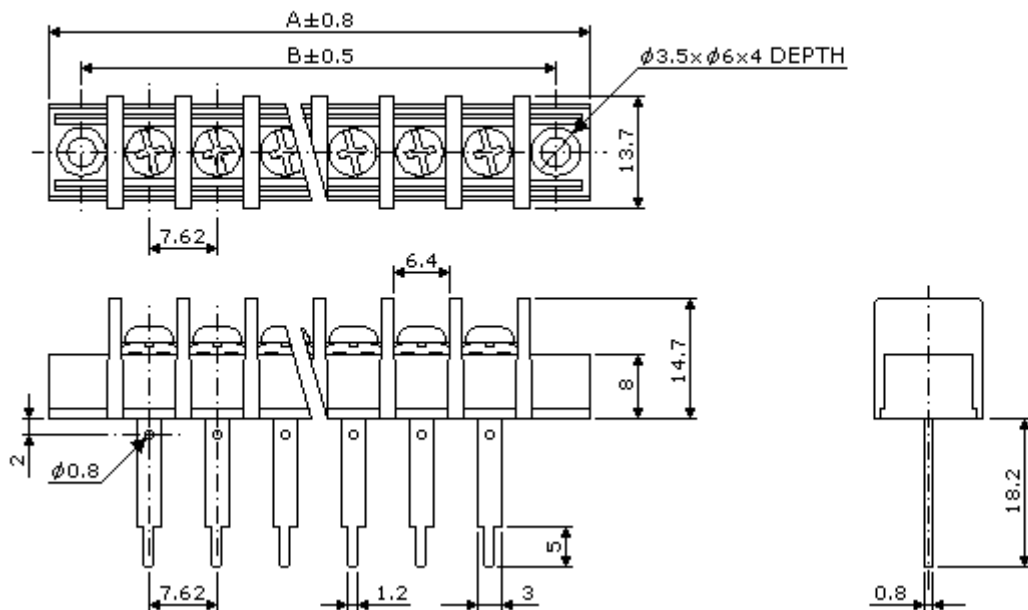


DIMENSIONS UNIT:mm(inch)

ETB54061** SERIES

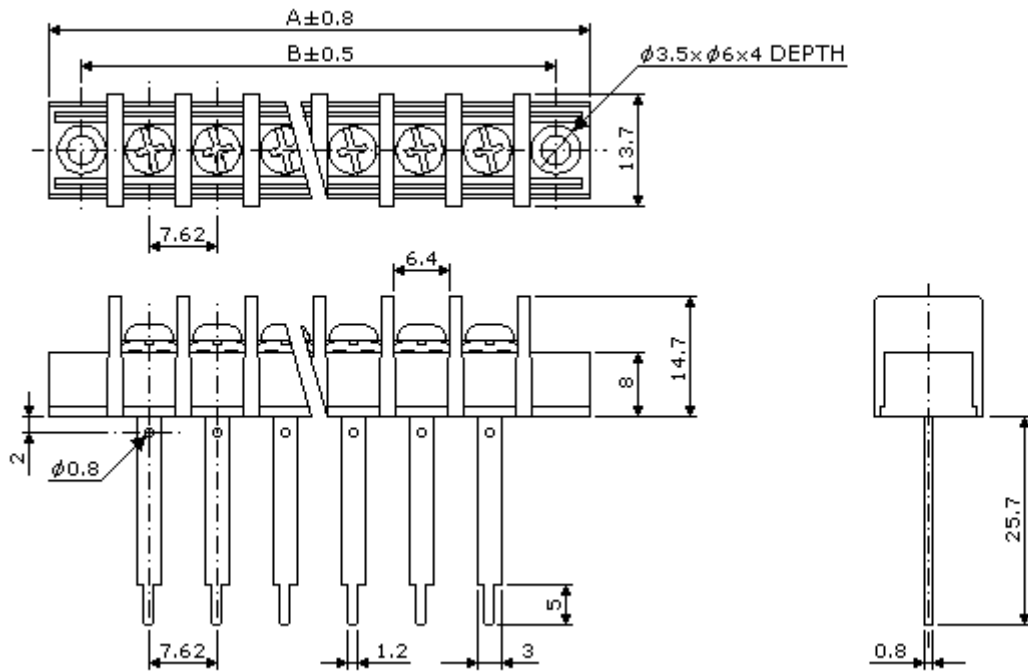


DIMENSIONS UNIT:mm(inch)

ETB54071** SERIES

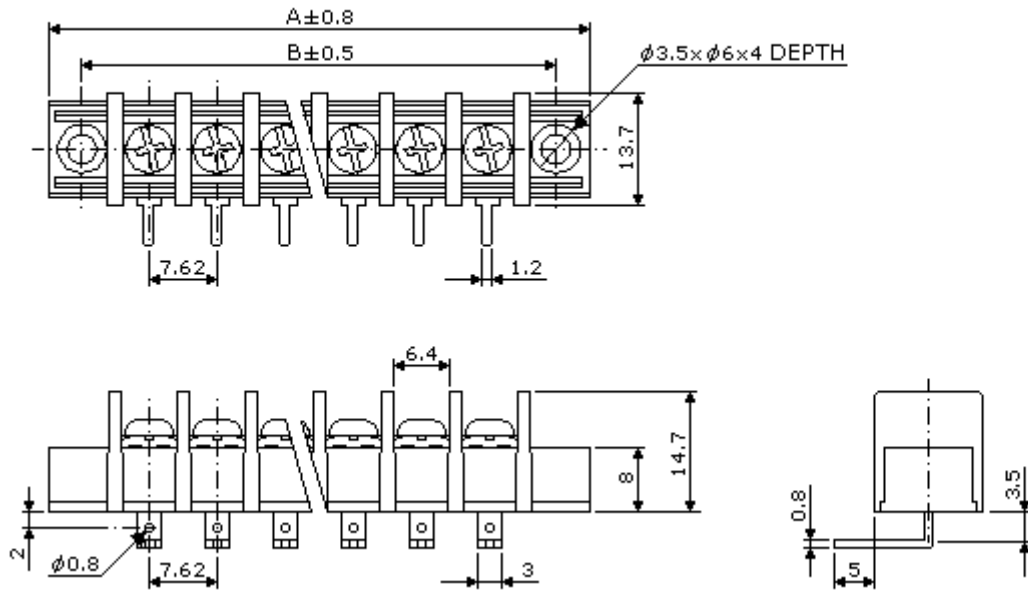


DIMENSIONS UNIT:mm(inch)

ETB54081** SERIES

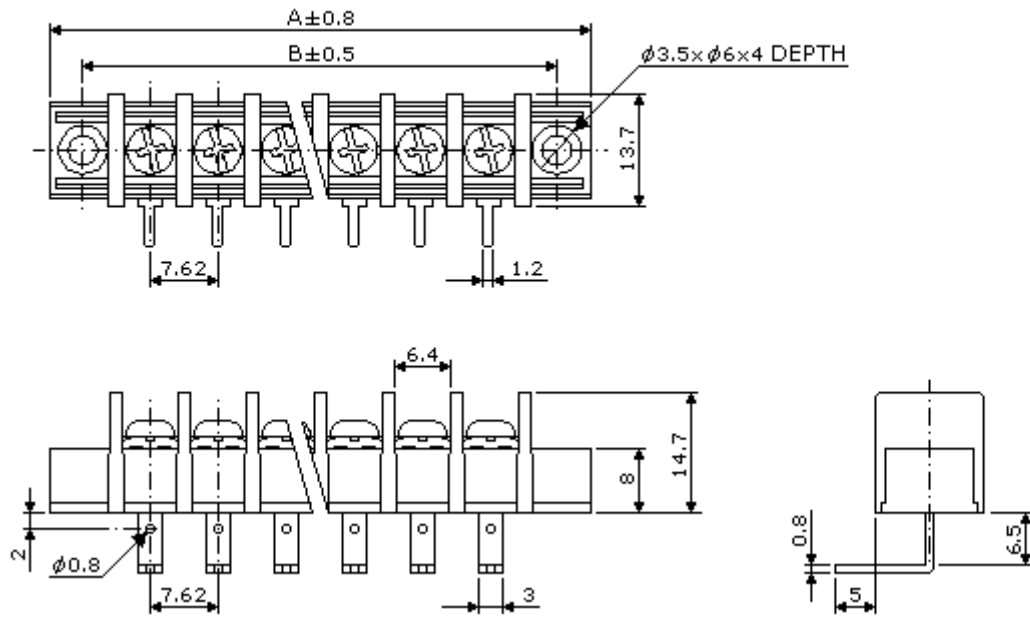


DIMENSIONS UNIT:mm(inch)

ETB54091** SERIES

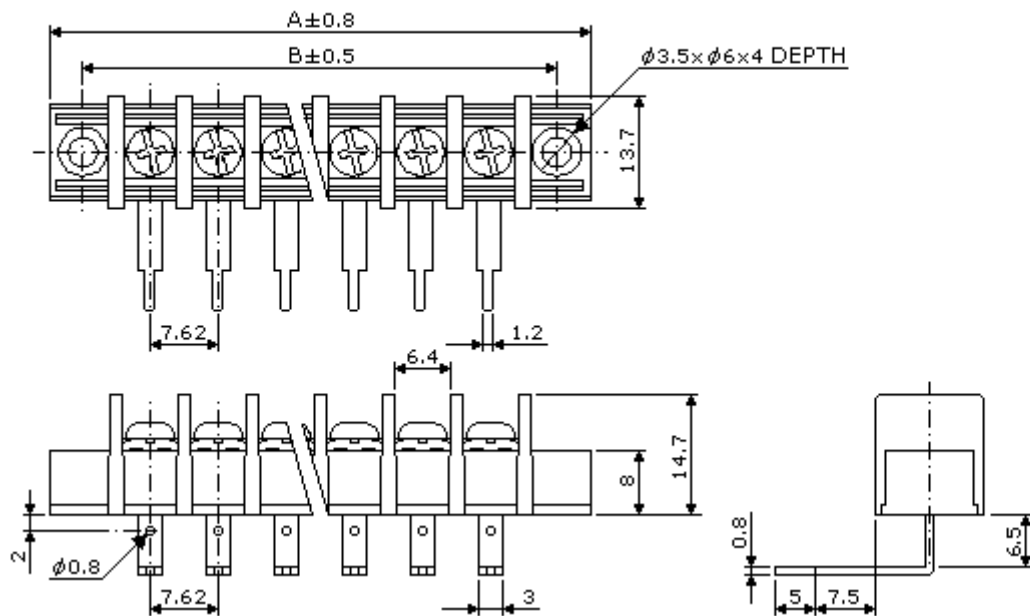

DIMENSIONS UNIT:mm(inch)

ETB54101** SERIES

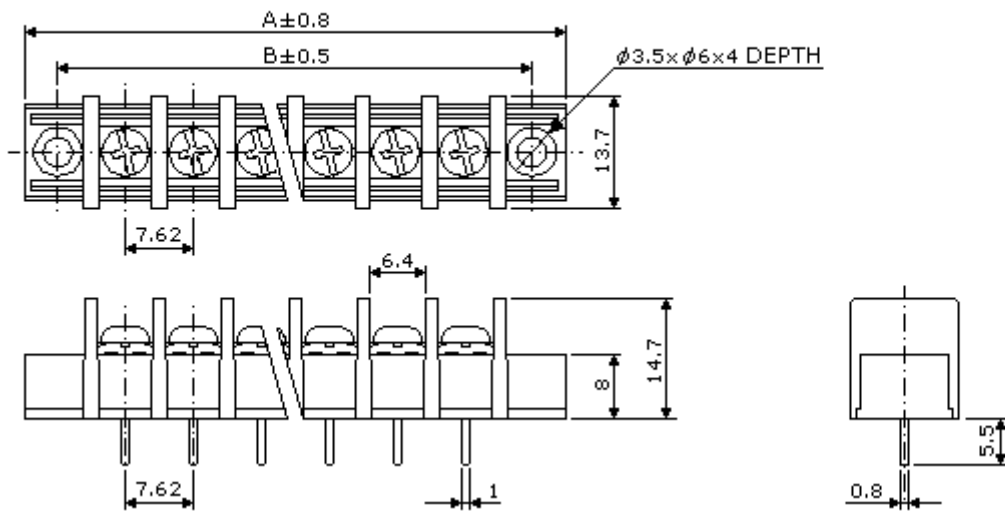

mm to inch

mm	0.8	1	1.2	1.6	2	2.8	3	3.5	4	5	5.5	6
inch	0.031	0.039	0.047	0.063	0.079	0.110	0.118	0.138	0.157	0.197	0.217	0.236
mm	6.4	6.5	7.5	7.62	8	10.5	13.7	14.7	15.2	18.2	25.7	
inch	0.252	0.256	0.295	0.300	0.315	0.413	0.539	0.579	0.598	0.717	1.012	

DIMENSIONS OF MOUNT TYPE

**NUMBER OF POLE 02~30.

POLE	2	3	4	5	6	7	8	9	10	11	12
A±0.8	30.5 (1.201)	38.1 (1.500)	45.7 (1.799)	53.3 (2.098)	61 (2.402)	68.6 (2.701)	76.2 (3.000)	83.8 (3.299)	91.4 (3.598)	99.1 (3.902)	106.7 (4.201)
B±0.5	22.86 (0.900)	30.48 (1.200)	38.1 (1.500)	45.72 (1.800)	53.34 (2.100)	60.96 (2.400)	68.58 (2.700)	76.2 (3.000)	83.82 (3.300)	91.44 (3.600)	99.06 (3.900)
POLE	13	14	15	16	17	18	19	20	21	22	23
A±0.8	114.3 (4.500)	121.9 (4.799)	129.5 (5.098)	137.2 (5.402)	144.8 (5.701)	152.4 (6.000)	160 (6.229)	167.6 (6.598)	175.3 (6.902)	182.9 (7.201)	190.5 (7.500)
B±0.5	106.68 (4.200)	114.3 (4.500)	121.92 (4.800)	129.54 (5.100)	137.16 (5.400)	144.78 (5.700)	152.4 (6.000)	160.02 (6.300)	167.64 (6.600)	175.26 (6.900)	182.88 (7.200)
POLE	24	25	26	27	28	29	30				
A±0.8	198.1 (7.799)	205.7 (8.098)	213.4 (8.402)	221 (8.701)	228.6 (9.000)	236.2 (9.299)	243.8 (9.598)				
B±0.5	190.5 (7.500)	198.12 (7.800)	205.74 (8.100)	213.36 (8.400)	220.98 (8.700)	228.6 (9.000)	236.22 (9.300)				

DIMENSIONS OF BARRIER TYPE

**NUMBER OF POLE 02~32.

POLE	2	3	4	5	6	7	8	9	10	11	12
A±0.8	16.8 (0.661)	24.5 (0.965)	32.1 (1.264)	39.7 (1.563)	47.3 (1.862)	54.9 (2.161)	62.6 (2.465)	70.2 (2.764)	77.8 (3.063)	85.4 (3.362)	93 (3.661)
B±0.5	7.62 (0.300)	15.24 (0.600)	22.86 (0.900)	30.48 (1.200)	38.1 (1.500)	45.72 (1.800)	53.34 (2.100)	60.96 (2.400)	68.58 (2.700)	76.2 (3.000)	83.82 (3.300)
POLE	13	14	15	16	17	18	19	20	21	22	23
A±0.8	100.7 (3.965)	108.3 (4.264)	115.9 (4.563)	123.5 (4.862)	131.1 (5.161)	138.8 (5.465)	146.4 (5.764)	154 (6.063)	161.6 (6.362)	169.2 (6.661)	176.9 (6.965)
B±0.5	91.44 (3.600)	99.06 (3.900)	106.68 (4.200)	114.3 (4.500)	121.92 (4.800)	129.54 (5.100)	137.16 (5.400)	144.78 (5.700)	152.4 (6.000)	160.02 (6.300)	167.64 (6.600)
POLE	24	25	26	27	28	29	30	31	32		
A±0.8	184.5 (7.264)	192.1 (7.563)	199.7 (7.862)	207.3 (8.161)	215 (8.465)	222.6 (8.764)	230.2 (9.063)	237.8 (9.362)	245.4 (9.661)		
B±0.5	175.26 (6.900)	182.88 (7.200)	190.5 (7.500)	198.12 (7.800)	205.74 (8.100)	213.36 (8.400)	220.98 (8.700)	228.6 (9.000)	236.22 (9.300)		