

TFS2915 is specifically designed for use as an Output Transformer in CEPT applications.

It has been approved by **MITEL** for use with their **MH89780** & **MH89790** devices.

TFS2915 is available in 5 versions: - 0, -1, -2, -4, & -5 for 75, 100, 120 and 75/120Ω line impedances.


TFS2915-5 is designed and approved for **MT89790B**, which is operating from a single 5Vdc supply

Typical applications are:

- PBX or computer to CEPT Digital Trunks.
- High speed data link using CEPT Digital Trunk.
- TDM Multiplexers.



MECHANICAL

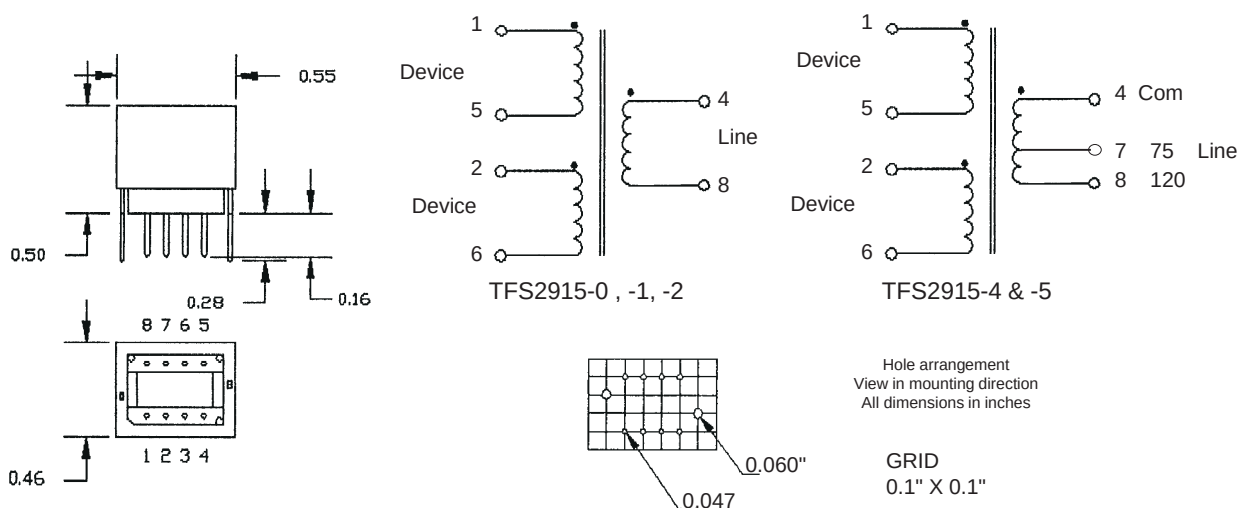

ELECTRICAL SPECIFICATIONS

			2915 - 0	- 1	- 2	- 4	- 5
Line Impedance			75 Ω	100 Ω	120 Ω	75/120 Ω	75/120 Ω
Inductance	mH	(4-8)	0.49	0.65	0.81	0.81	> 1.0
		(4-7)				0.49	> 0.6
Turns Ratio		(1-5):(2-6)	1:1	1:1	1:1	1:1	1:1
		(1-5):(4-8)	2.5:1	2.19:1	1.95:1	1.95:1	1:1.33
		(1-5):(4-7)				2.5:1	1:1
Isolation	Volts (rms)		1500	1500	1500	1500	1500