




5

4


3

2



1

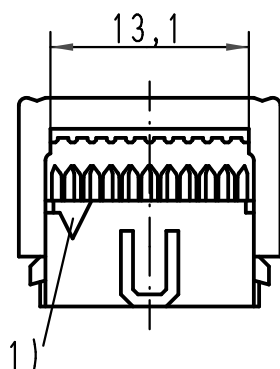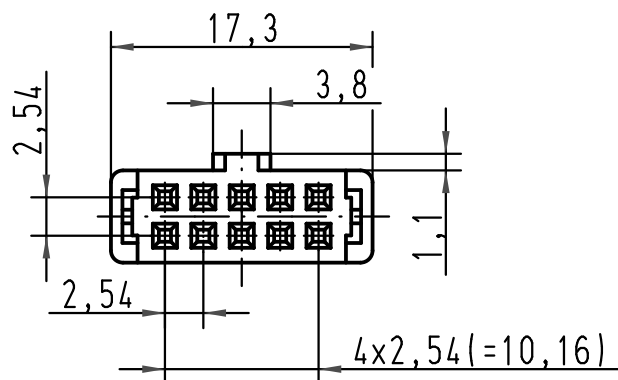

vorverrastet
pre assembled
preassemble



strain relief verrastet
fitted
assemble

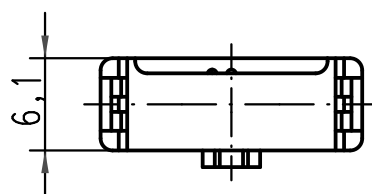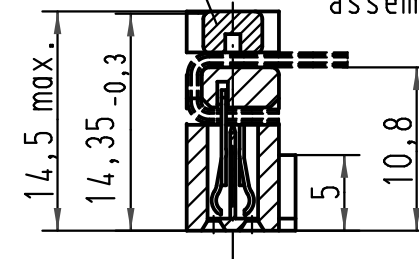

- 1) Markierung erster Kontakt, Ader 1 des Flachkabels
1) Contact no.1, 1st wire of flat cable
1) Contact no.1, repère 1 du câble

A

09 18 510 5813 58U	0,76 µm Au	Bulk packaging MOQ = 3000 pcs		All Dimensions in mm Original Size DIN A 4			Techn. Character.			Nicht tolerierte Maßel/Free size tolerances		
09 18 510 6813 58U	2							Dat.	Name	Maßstab/Scale 2 : 1	SEK 18 Female connector 10 poles with central polarisation without cable stop with strain relief	
09 18 510 7813 58U	3											
09 18 510 5813	0,76 µm Au	N.A					Detail.	01-FEB-00	Th			
09 18 510 6813	2	N.A				Insp.	30-SEP-11	JB				
09 18 510 7813	3	N.A				Stand.						
Bestell-Nr. Part-No. Reference	Anforderungsstufe performance level Niveau de qualite	Index Designation	36265	30-SEP-11	BH	HARTING EURL F-95972 Paris				TB 0918510X813	Blatt/ page 1 / 1	
			26570	01-FEB-00	JB							
			Mod.	Dat.	Name					Sub.		