






E

D


C

B

A

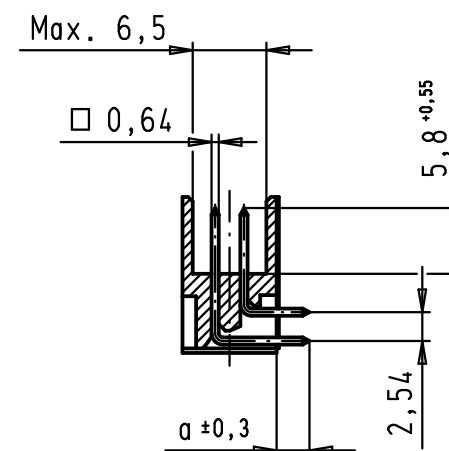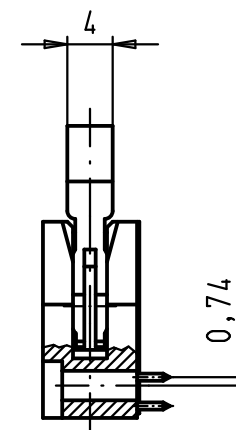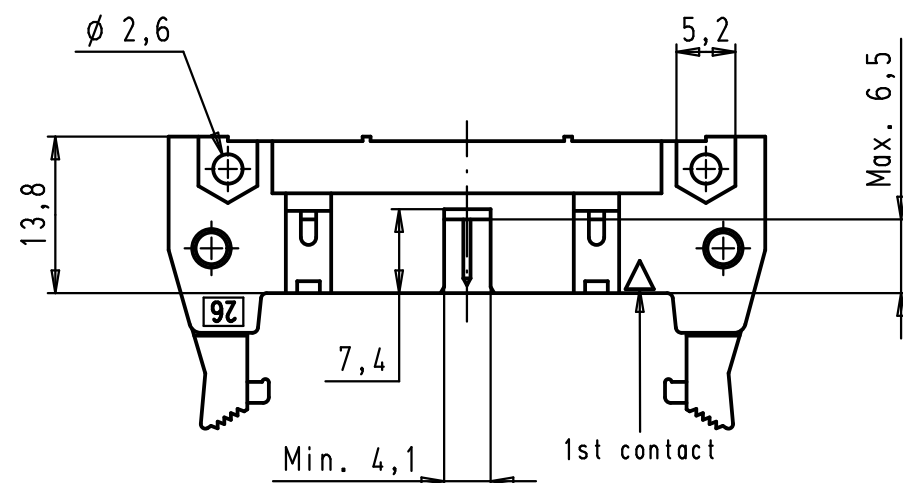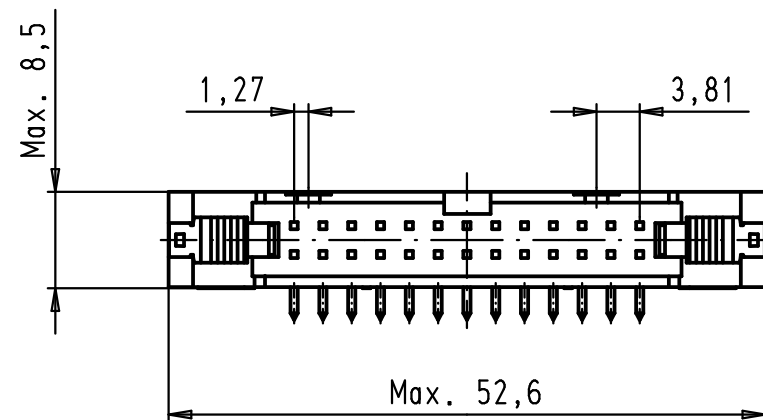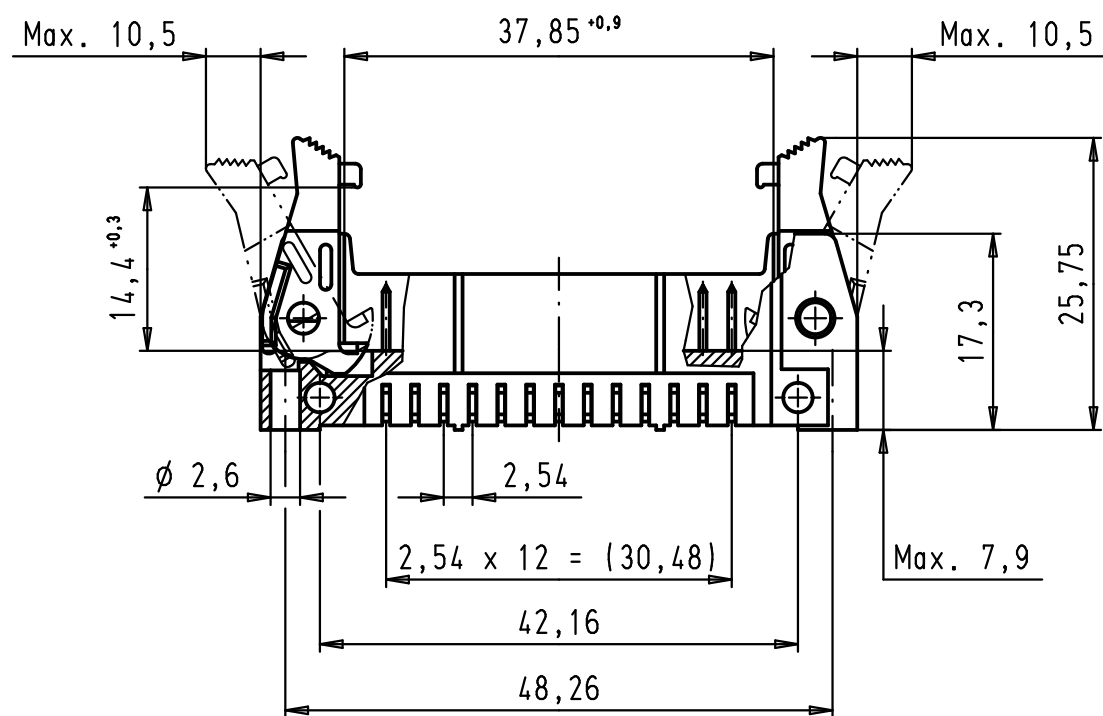


PCB layout, component side

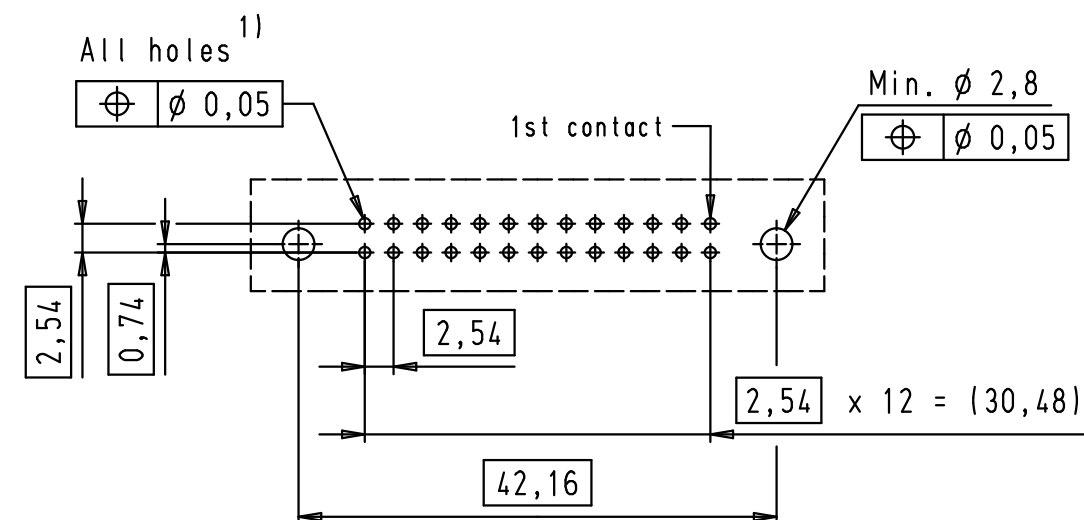

1) Solder pins for PCB connections
 $\phi 1 \pm 0,1$ according to IEC 60 326-3

09 18 526 7901	3	4,5
09 18 526 6901	2	4,5
09 18 526 5901	0,76 $\mu\text{m Au}$	4,5
09 18 526 7903	3	2,9
09 18 526 6903	2	2,9
09 18 526 5903	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

				Det.	Name			
34890	29/01/08	PK	Detail.	01/12/99	JB	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard	Maßstab/ Scale
29753	11/03/02	JB	Insp.				26 poles	1,5:1
29739	03/12/01	JB	Stand.				Angled pins	
27931	15/06/00	JB					Long locking levers	
26554	01/12/99	JB					TB 09 18 526 X90X	Blatt/ Page
Mod.	Det.	Name						2 / 2