

Customer Information Sheet

DRAWING No.: M20-107XX00

SHEET 2 OF 2

IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

ORDER CODE:

M20-107XX00

No. OF WAYS PER ROW
02 TO 12

SPECIFICATIONS:

ELECTRICAL:

CURRENT RATING = 3A AC/DC

VOLTAGE RATING = 250V AC MAX




CONTACT RESISTANCE = 20 MILLIOHMS MAX

INSULATION RESISTANCE = 5,000 MEGOHMS MIN

DIELECTRIC STRENGTH = 1,500V AC FOR 1 MINUTE

ENVIRONMENTAL:

TEMPERATURE RANGE = -40°C TO +105°C

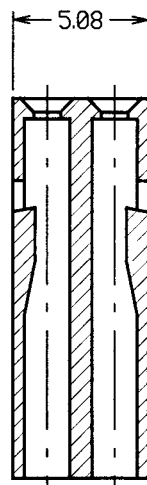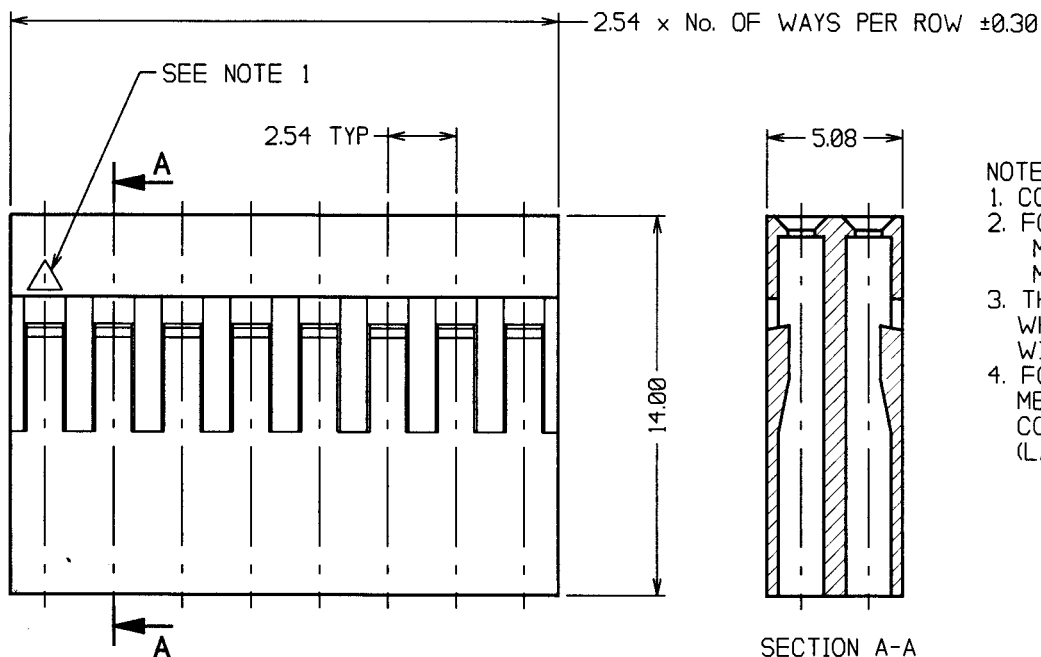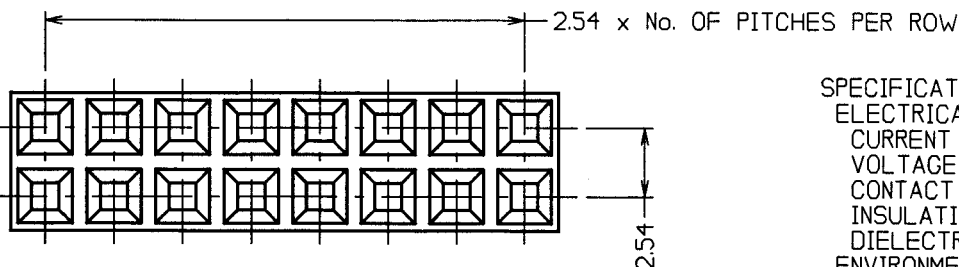

SECTION A-A

NOTES:

1. CONTACT No. 1 MARKER SYMBOL.
2. FOR USE WITH CRIMP CONTACTS:
M20-11600XX (REELED CONTACTS),
M20-11800XX (LOOSE CONTACTS).
3. THE ABOVE SPECIFICATIONS APPLY WHEN THIS MOULDING IS USED WITH THE SPECIFIED CONTACTS.
4. FOR COMPLETE ELECTRICAL AND MECHANICAL SPECIFICATIONS, SEE COMPONENT SPECIFICATION C001XX (LATEST ISSUE).

WJB	3	19.06.01	5994
NAME	ISS.	DATE	C/NOTE
APPROVED: <i>[Signature]</i>			
CHECKED: <i>[Signature]</i>			
DRAWN: A. LIOTTA			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN INC U.S.A.	HARWIN PLC U.K.	HARWIN PTE SINGAPORE
TEL: (812) 285 0055	TEL: 023 9237 0451	TEL: 65 7794909
FAX: (812) 285 0056	FAX: 023 9231 4590	FAX: 65 7793868

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. - ±1mm
X.X - ±0.25mm
X.XX - ±0.10mm
X.XXX - ±0.01mm
ANGLES - ±5°
UNLESS STATED

MATERIAL:
MODIFIED PPO
UL94V-1 BLACK

FINISH: CLEAN

S/AREA: mm²

TITLE:
2.54mm PITCH DIL
CRIMP MOULDING

DRAWING NUMBER:
M20-107XX00

SHT
2
OF
2