

Customer Information Sheet

DRAWING No.: M22-713XXXX

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

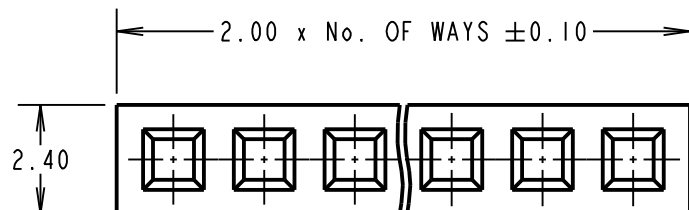

ORDER CODE:

M22-713XXXXNo. OF WAYS
03 TO 32

FINISH:

42 = SELECTIVE GOLD +
100% TIN (MATT FINISH)

SPECIFICATION:

MATERIAL:

MOULDING - LCP UL94V-0, BLACK

CONTACTS - PHOSPHOR BRONZE

FINISH: (OVER NICKEL)

42 = 1.27µ GOLD ON CONTACT AREA,

2.54µ 100% TIN OVER NICKEL

(MATTE FINISH) ON TAILS

MECHANICAL:

INSERTION FORCE - 2N MAX

WITHDRAWAL FORCE - 0.2N MIN

DURABILITY - 1000 OPERATIONS

ELECTRICAL:

CURRENT RATING - 1A AC/DC

VOLTAGE PROOF - 500V AC MIN

CONTACT RESISTANCE - 20 MILLIOHMS MAX

INSULATION RESISTANCE - 1000 MEGAOHMS MIN


DIELECTRIC WITHSTANDING - 500V AC FOR 1 MIN

ENVIRONMENTAL:

TEMPERATURE RANGE = -40° TO +105°

PACKING:

TUBE

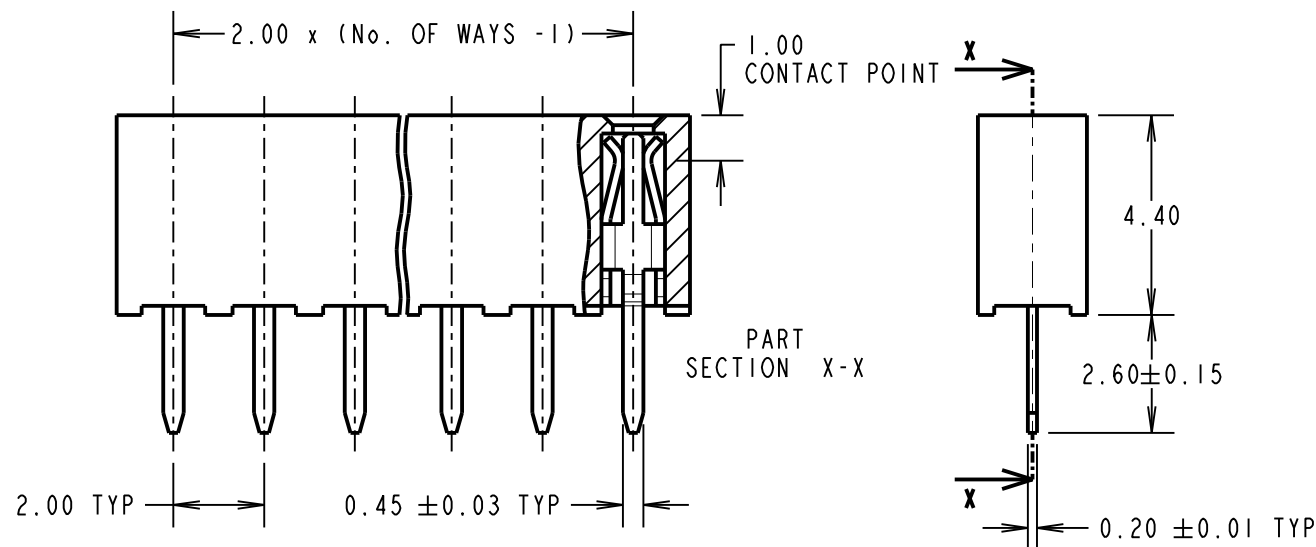FOR COMPLETE SPECIFICATION SEE COMPONENT
SPECIFICATION C018XX (LATEST ISSUE)

NOTES:

1. RECOMMENDED PCB HOLE SIZE = Ø0.80mm

SM	6	17.09.10	10936
NAME	ISS.	DATE	C/NOTE
APPROVED: S. MCCULLAGH			
CHECKED: R. ADDE			
DRAWN: J. EVANS			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA TEL: 603 893 5376 FAX: 603 893 5396 mis@harwin.com	HARWIN Europe (UK) TEL: 023 9231 4545 FAX: 023 9231 4590 mis@harwin.co.uk	HARWIN Asia TEL: +65 6 779 4909 FAX: +65 6 779 3868 mis@harwin.com.sg
--	--	--

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

2.00mm PITCH SIL
VERTICAL SOCKET ASSEMBLY

DRAWING NUMBER:

M22-713XXXXSHT
2 OF 2