



SURFACE MOUNT FUSE RoHS Compliant & Pb-Free


12T (1206)

表面贴装片式保险丝(慢断型) SURFACE MOUNT CHIP FUSE (SLOW-BLOW)



尺寸 DIMENSIONS:

上面 TOP VIEW:

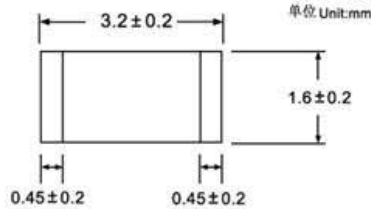

侧面 SIDE VIEW:



标准 Standards: UL 248-1, UL 248-14

工作温度 Operating Temperature: -55°C ~ 90°C.


储存温度 Storing Temperature: -55°C ~ 85°C.

耐焊接热性 Resistance to soldering heat: 260°C, 10s Max.

可焊性 Solderability: 235°C ± 5°C, 3.5s+0.5/-0s

12T 平均 I-T 曲线图 (仅供参考)

12T AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

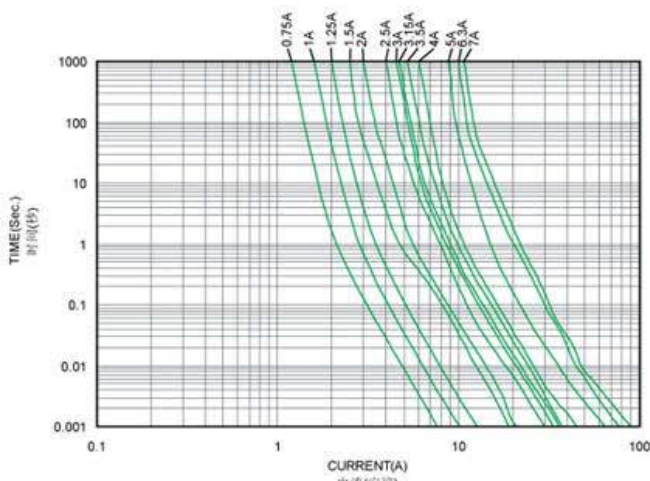

目录编号 CATALOG NO.	额定电流 CURRENT RATING	安全认证 SAFETY APPROVALS					
		UR			CUR		
		L1	L2	L3	L1	L2	L3
12T-0100L	100mA			●			●
12T-0125L	125mA			●			●
12T-0160L	160mA			●			●
12T-0200L	200mA			●			●
12T-0250L	250mA			●			●
12T-0315L	315mA			●			●
12T-0375L	375mA			●			●
12T-0400L	400mA			●			●
12T-0500L	500mA			●			●
12T-0630L	630mA			●			●
12T-0750L	750mA			●			●
12T-800L	800mA			●			●
12T-010L	1A			●			●
12T-013L	1.25A			●			●
12T-015L	1.5A			●			●
12T-016L	1.6A			●			●
12T-020L	2A			●			●
12T-025L	2.5A			●			●
12T-030L	3A			●			●
12T-032L	3.15A	●	●		●	●	
12T-035L	3.5A	●	●		●	●	
12T-040L	4A	●	●		●	●	
12T-050L	5A	●	●		●	●	
12T-063L	6.3A	●	●		●	●	
12T-070L	7A	●	●		●	●	

● DENOTES FOR APPROVED (●表示已取得认证)
L1 DENOTES FOR 24V (表示24V)
L2 DENOTES FOR 32V (表示32V)
L3 DENOTES FOR 63V (表示63V)

分断能力 INTERRUPTING CAPACITY:

- 50A 63VAC 100mA-3A
- 35A 24VAC 3.15A-7A
- 50A 63VDC 100mA-3A
- 50A 32VDC 3.15A-7A

电气特性 ELECTRICAL CHARACTERISTICS:

额定电流的% % of CURRENT RATING	熔断时间 BLOWING TIME	
100%	最快4小时	4 hours Min.
200%	1-120秒	1-120 seconds
300%	0.05-3.00秒	0.05-3.00 seconds
800%	0.0015-0.05秒	0.0015-0.05 seconds

包装 PACKING:

5,000 PIECES TAPED AND REELED IN ONE BOX

每卷5,000只保险丝, 装入一个包装盒

包装盒尺寸
BOX SIZE

