


# PolarHV™ Power MOSFET

**IXTQ 26N50P**  
**IXTT 26N50P**  
**IXTV 26N50P**  
**IXTV 26N50PS**


$V_{DSS} = 500 \text{ V}$   
 $I_{D25} = 26 \text{ A}$   
 $R_{DS(on)} \leq 230 \text{ m}\Omega$

N-Channel Enhancement Mode  
Avalanche Rated




| Symbol     | Test Conditions                                                                                                                         | Maximum Ratings |                  |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------|
| $V_{DSS}$  | $T_J = 25^\circ\text{C to } 150^\circ\text{C}$                                                                                          | 500             | V                |
| $V_{DGR}$  | $T_J = 25^\circ\text{C to } 150^\circ\text{C}; R_{GS} = 1 \text{ M}\Omega$                                                              | 500             | V                |
| $V_{GSS}$  | Continuous                                                                                                                              | $\pm 30$        | V                |
| $V_{GSM}$  | Transient                                                                                                                               | $\pm 40$        | V                |
| $I_{D25}$  | $T_C = 25^\circ\text{C}$                                                                                                                | 26              | A                |
| $I_{DM}$   | $T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$                                                                              | 78              | A                |
| $I_{AR}$   | $T_C = 25^\circ\text{C}$                                                                                                                | 26              | A                |
| $E_{AR}$   | $T_C = 25^\circ\text{C}$                                                                                                                | 40              | mJ               |
| $E_{AS}$   | $T_C = 25^\circ\text{C}$                                                                                                                | 1.0             | J                |
| $dv/dt$    | $I_S \leq I_{DM}$ , $di/dt \leq 100 \text{ A}/\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ ,<br>$T_J \leq 150^\circ\text{C}$ , $R_G = 4 \Omega$ | 10              | V/ns             |
| $P_D$      | $T_C = 25^\circ\text{C}$                                                                                                                | 400             | W                |
| $T_J$      |                                                                                                                                         | -55 ... +150    | $^\circ\text{C}$ |
| $T_{JM}$   |                                                                                                                                         | 150             | $^\circ\text{C}$ |
| $T_{stg}$  |                                                                                                                                         | -55 ... +150    | $^\circ\text{C}$ |
| $T_L$      | 1.6 mm (0.062 in.) from case for 10 s                                                                                                   | 300             | $^\circ\text{C}$ |
| $T_{SOLD}$ | Plastic body for 10 s                                                                                                                   | 260             | $^\circ\text{C}$ |
| $M_d$      | Mounting torque (TO-3P)                                                                                                                 | 1.13/10         | Nm/lb.in.        |
| Weight     | TO-3P                                                                                                                                   | 6               | g                |
|            | TO-268                                                                                                                                  | 5.5             | g                |
|            | PLUS220 & PLUS220SMD                                                                                                                    | 5               | g                |


TO-3P (IXTQ)

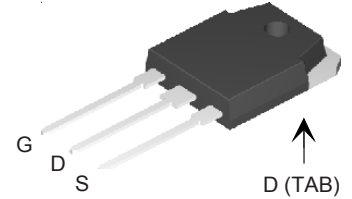


TO-268 (IXTT)



PLUS220 (IXTV)

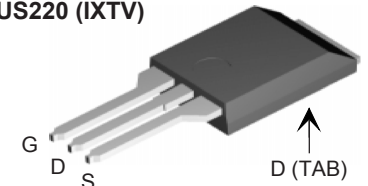

PLUS220SMD (IXTV\_S)



G = Gate      D = Drain  
S = Source      TAB = Drain

| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified)                                      | Characteristic Values |      |                      |
|--------------|------------------------------------------------------------------------------------------------------------------|-----------------------|------|----------------------|
|              |                                                                                                                  | Min.                  | Typ. | Max.                 |
| $BV_{DSS}$   | $V_{GS} = 0 \text{ V}$ , $I_D = 250 \mu\text{A}$                                                                 | 500                   |      | V                    |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$ , $I_D = 250 \mu\text{A}$                                                                      | 3.0                   |      | 5.5 V                |
| $I_{GSS}$    | $V_{GS} = \pm 30 \text{ V}_{DC}$ , $V_{DS} = 0$                                                                  |                       |      | $\pm 100 \text{ nA}$ |
| $I_{DSS}$    | $V_{DS} = V_{DSS}$                                                                                               |                       |      | 25 $\mu\text{A}$     |
|              | $V_{GS} = 0 \text{ V}$ $T_J = 125^\circ\text{C}$                                                                 |                       |      | 250 $\mu\text{A}$    |
| $R_{DS(on)}$ | $V_{GS} = 10 \text{ V}$ , $I_D = 0.5 I_{D25}$<br>Pulse test, $t \leq 300 \mu\text{s}$ , duty cycle $d \leq 2 \%$ |                       |      | 230 $\text{m}\Omega$ |

## Features

- International standard packages
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
  - easy to drive and to protect

## Advantages


- Easy to mount
- Space savings
- High power density

| Symbol                    | Test Conditions                                                                                        | Characteristic Values<br>(T <sub>j</sub> = 25° C, unless otherwise specified) |      |      |
|---------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|------|------|
|                           |                                                                                                        | Min.                                                                          | Typ. | Max. |
| <b>g<sub>fs</sub></b>     | V <sub>DS</sub> = 20 V; I <sub>D</sub> = 0.5 I <sub>D25</sub> , pulse test                             | 24                                                                            | 31   | S    |
| <b>C<sub>iss</sub></b>    | V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 25 V, f = 1 MHz                                               |                                                                               | 3600 | pF   |
| <b>C<sub>oss</sub></b>    |                                                                                                        |                                                                               | 380  | pF   |
| <b>C<sub>rss</sub></b>    |                                                                                                        |                                                                               | 48   | pF   |
| <b>t<sub>d(on)</sub></b>  | V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 0.5 I <sub>D25</sub><br>R <sub>G</sub> = 4 Ω (External)      |                                                                               | 20   | ns   |
| <b>t<sub>r</sub></b>      |                                                                                                        |                                                                               | 25   | ns   |
| <b>t<sub>d(off)</sub></b> |                                                                                                        |                                                                               | 58   | ns   |
| <b>t<sub>f</sub></b>      |                                                                                                        |                                                                               | 20   | ns   |
| <b>Q<sub>g(on)</sub></b>  | V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 0.5 V <sub>DSS</sub> , I <sub>D</sub> = 0.5 I <sub>D25</sub> |                                                                               | 65   | nC   |
| <b>Q<sub>gs</sub></b>     |                                                                                                        |                                                                               | 18   | nC   |
| <b>Q<sub>gd</sub></b>     |                                                                                                        |                                                                               | 20   | nC   |
| <b>R<sub>thJC</sub></b>   |                                                                                                        |                                                                               | 0.31 | °C/W |
| <b>R<sub>thCS</sub></b>   |                                                                                                        |                                                                               | 0.21 | °C/W |

## Source-Drain Diode


| Symbol                | Test Conditions                                                                                        | Characteristic Values<br>(T <sub>j</sub> = 25° C, unless otherwise specified) |      |       |
|-----------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|------|-------|
|                       |                                                                                                        | Min.                                                                          | Typ. | Max.  |
| <b>I<sub>S</sub></b>  | V <sub>GS</sub> = 0 V                                                                                  |                                                                               |      | 26 A  |
| <b>I<sub>SM</sub></b> | Repetitive                                                                                             |                                                                               |      | 104 A |
| <b>V<sub>SD</sub></b> | I <sub>F</sub> = I <sub>S</sub> , V <sub>GS</sub> = 0 V,<br>Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 % |                                                                               |      | 1.5 V |
| <b>t<sub>rr</sub></b> | I <sub>F</sub> = 25A, -di/dt = 100 A/μs                                                                | 300                                                                           |      | ns    |
| <b>Q<sub>RM</sub></b> | V <sub>R</sub> = 100V, V <sub>GS</sub> = 0 V                                                           | 3.3                                                                           |      | μC    |

## PLUS220SMD (IXTV\_S) Outline

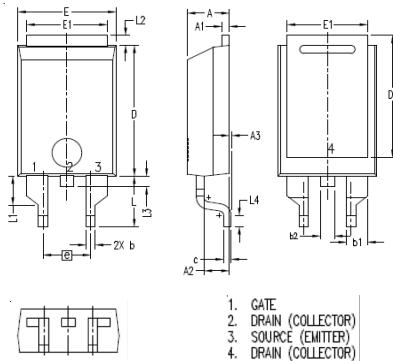

| SYM | INCHES   |      | MILLIMETER |       |
|-----|----------|------|------------|-------|
|     | MIN      | MAX  | MIN        | MAX   |
| A   | .169     | .185 | 4.30       | 4.70  |
| A1  | .028     | .035 | 0.70       | 0.90  |
| A2  | .098     | .118 | 2.50       | 3.00  |
| A3  | .000     | .010 | 0.00       | 0.25  |
| b   | .035     | .047 | 0.90       | 1.20  |
| b1  | .080     | .095 | 2.03       | 2.41  |
| b2  | .054     | .064 | 1.37       | 1.63  |
| c   | .028     | .035 | 0.70       | 0.90  |
| D   | .551     | .591 | 14.00      | 15.00 |
| D1  | .512     | .539 | 13.00      | 13.70 |
| E   | .394     | .433 | 10.00      | 11.00 |
| E1  | .331     | .346 | 8.40       | 8.80  |
| e   | .200 BSC |      | 5.08 BSC   |       |
| L   | .209     | .228 | 5.30       | 5.80  |
| L1  | .118     | .138 | 3.00       | 3.50  |
| L2  | .035     | .051 | 0.90       | 1.30  |
| L3  | .047     | .059 | 1.20       | 1.50  |
| L4  | .039     | .059 | 1.00       | 1.50  |


## TO-3P (IXTQ) Outline

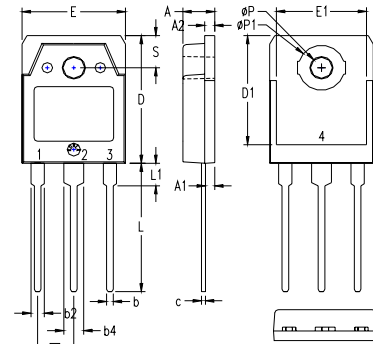

- 1 - GATE
- 2 - DRAIN (COLLECTOR)
- 3 - SOURCE (EMITTER)
- 4 - DRAIN (COLLECTOR)

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .185     | .193 | 4.70        | 4.90  |
| A1  | .051     | .059 | 1.30        | 1.50  |
| A2  | .057     | .065 | 1.45        | 1.65  |
| b   | .035     | .045 | 0.90        | 1.15  |
| b2  | .075     | .087 | 1.90        | 2.20  |
| b4  | .114     | .126 | 2.90        | 3.20  |
| c   | .022     | .031 | 0.55        | 0.80  |
| D   | .780     | .799 | 19.80       | 20.30 |
| D1  | .665     | .677 | 16.90       | 17.20 |
| E   | .610     | .622 | 15.50       | 15.80 |
| E1  | .531     | .539 | 13.50       | 13.70 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| L   | .779     | .795 | 19.80       | 20.20 |
| L1  | .134     | .142 | 3.40        | 3.60  |
| ØP  | .126     | .134 | 3.20        | 3.40  |
| ØP1 | .272     | .280 | 6.90        | 7.10  |
| S   | .193     | .201 | 4.90        | 5.10  |

## PLUS220 (IXTV) Outline

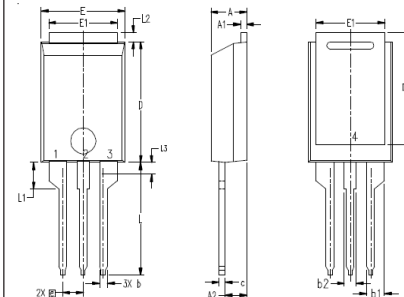


1. GATE
2. DRAIN (COLLECTOR)
3. SOURCE (EMITTER)
4. DRAIN (COLLECTOR)

| SYM | INCHES   |      | MILLIMETER |       |
|-----|----------|------|------------|-------|
|     | MIN      | MAX  | MIN        | MAX   |
| A   | .169     | .185 | 4.30       | 4.70  |
| A1  | .028     | .035 | 0.70       | 0.90  |
| A2  | .098     | .118 | 2.50       | 3.00  |
| b   | .035     | .047 | 0.90       | 1.20  |
| b1  | .080     | .095 | 2.03       | 2.41  |
| b2  | .054     | .064 | 1.37       | 1.63  |
| c   | .028     | .035 | 0.70       | 0.90  |
| D   | .551     | .591 | 14.00      | 15.00 |
| D1  | .512     | .539 | 13.00      | 13.70 |
| E   | .394     | .433 | 10.00      | 11.00 |
| E1  | .331     | .346 | 8.40       | 8.80  |
| e   | .100 BSC |      | 2.54 BSC   |       |
| L   | .512     | .551 | 13.00      | 14.00 |
| L1  | .118     | .138 | 3.00       | 3.50  |
| L2  | .035     | .051 | 0.90       | 1.30  |
| L3  | .047     | .059 | 1.20       | 1.50  |


IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585  
one or more of the following U.S. patents: 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692  
4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2


**Fig. 1. Output Characteristics  
@ 25°C**

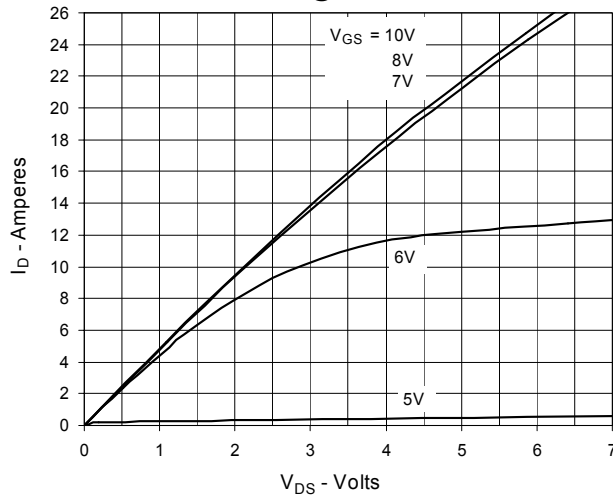


**Fig. 2. Extended Output Characteristics  
@ 25°C**

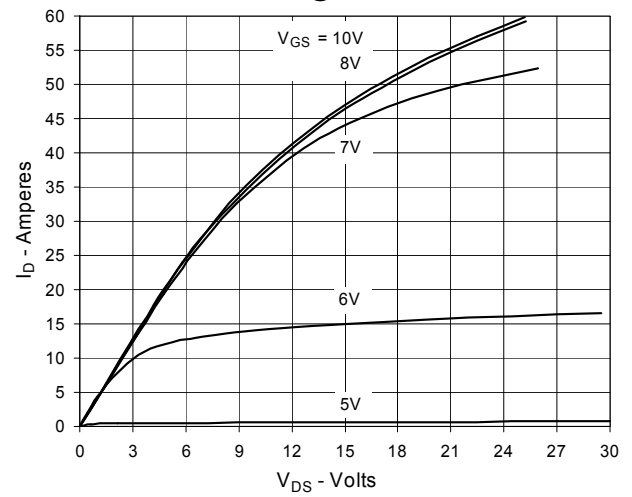


**Fig. 3. Output Characteristics  
@ 125°C**

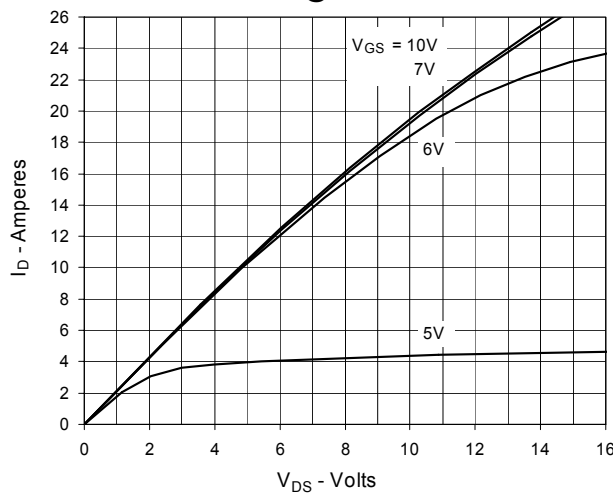


**Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 13A$  Value  
vs. Junction Temperature**

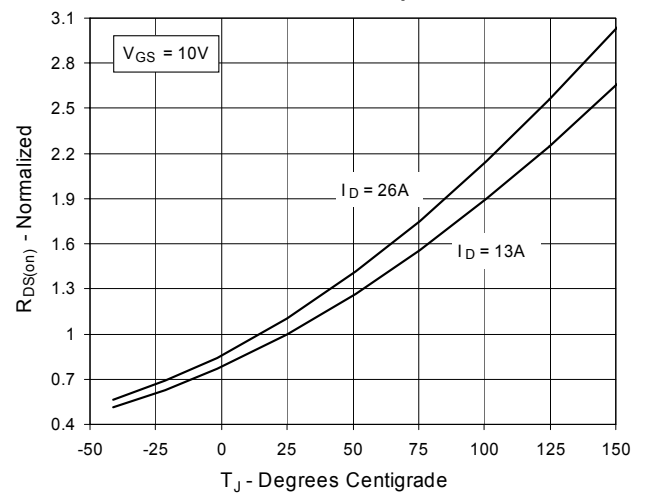


**Fig. 5.  $R_{DS(on)}$  Normalized to  $I_D = 13A$  Value  
vs. Drain Current**

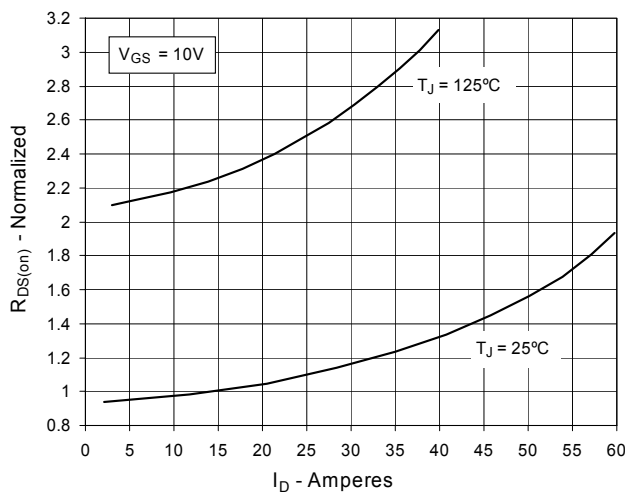


**Fig. 6. Maximum Drain Current vs.  
Case Temperature**

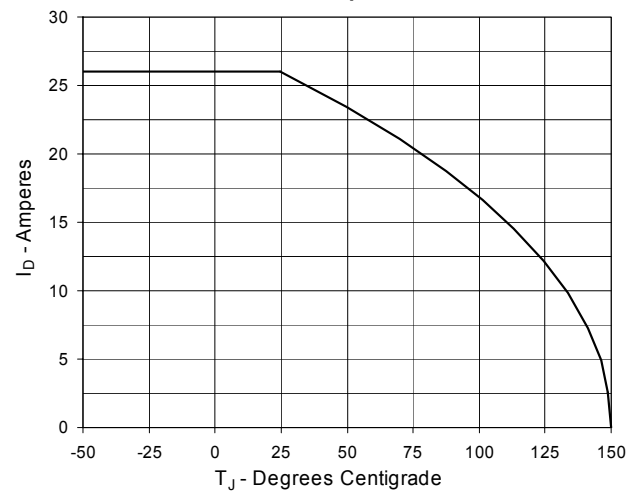


**Fig. 7. Input Admittance**

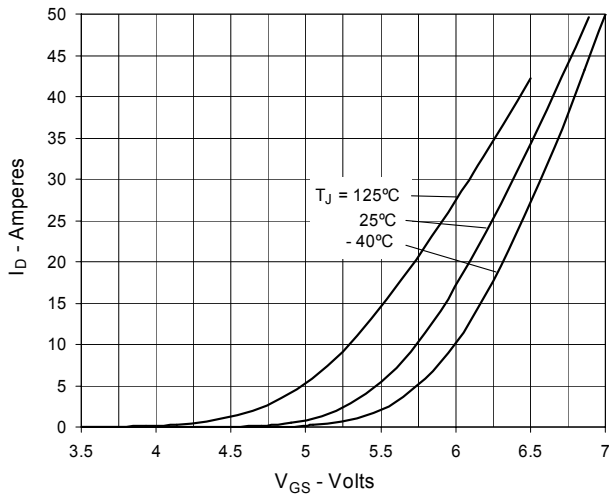


**Fig. 8. Transconductance**

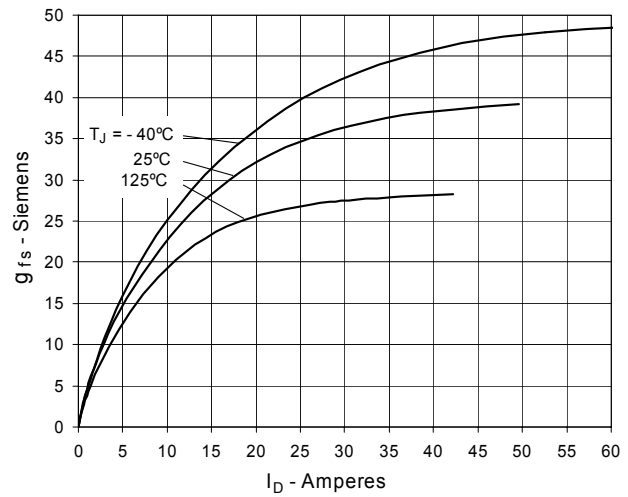


**Fig. 9. Forward Voltage Drop of Intrinsic Diode**

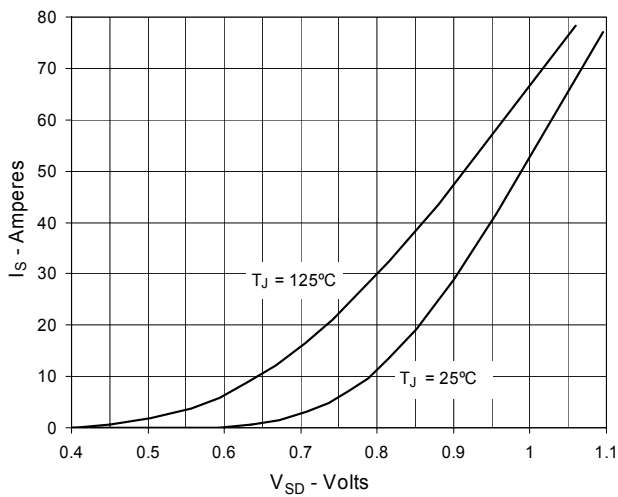

**Fig. 10. Gate Charge**

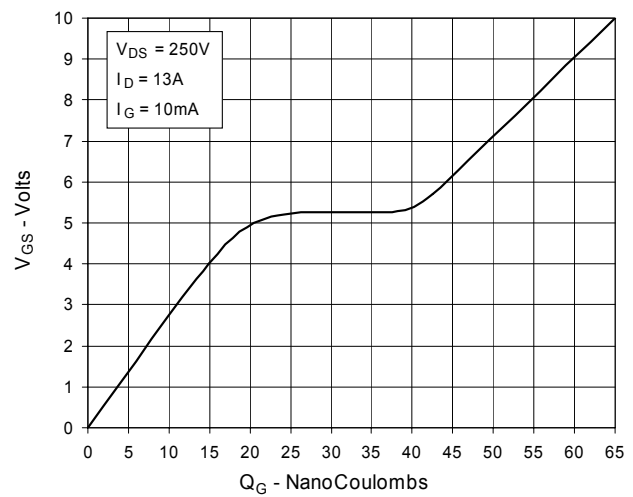

**Fig. 11. Capacitance**

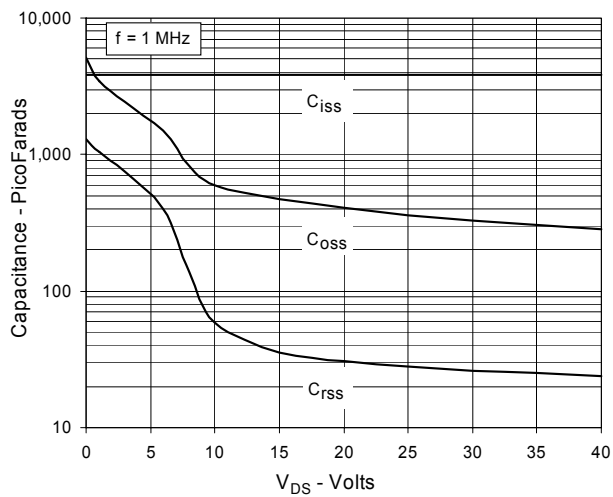

**Fig. 12. Forward-Bias Safe Operating Area**



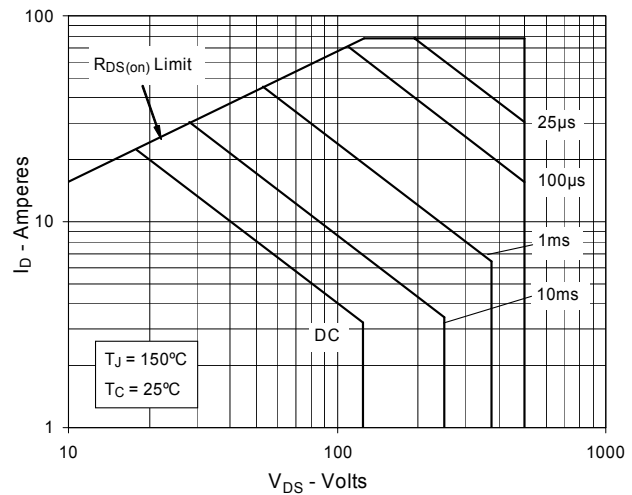


Fig. 13. Maximum Transient Thermal Resistance

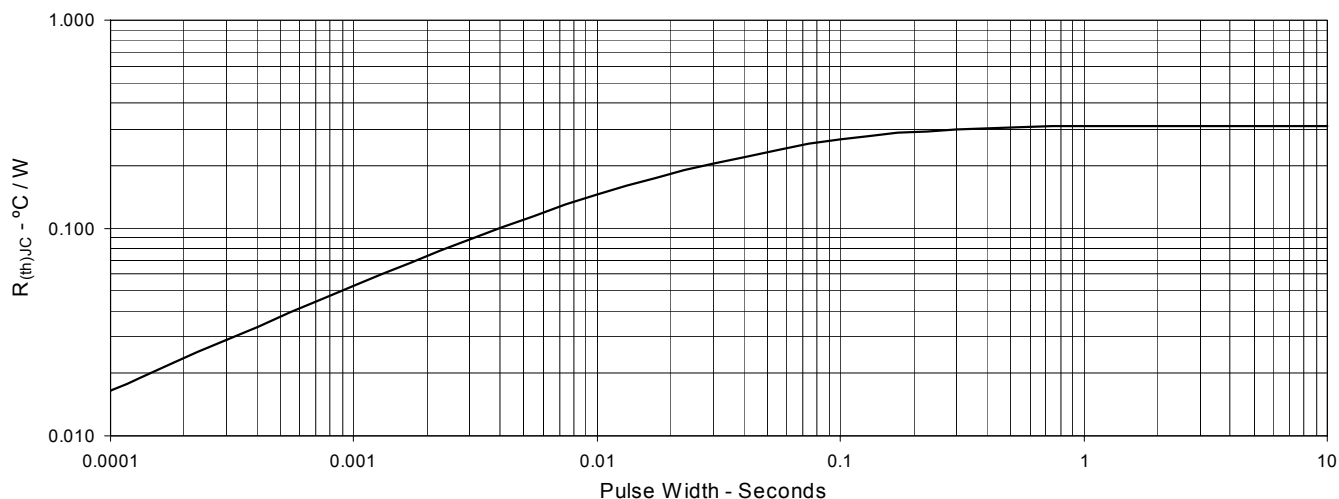

TO-268 (IXTT) Outline

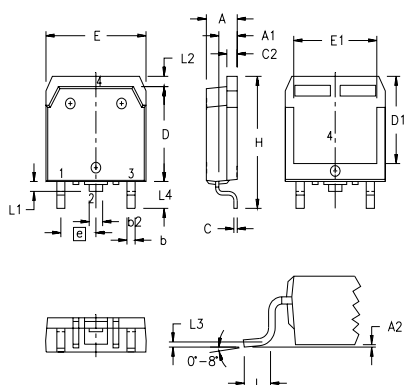

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .193     | .201 | 4.90        | 5.10  |
| A1  | .106     | .114 | 2.70        | 2.90  |
| A2  | .001     | .010 | 0.02        | 0.25  |
| b   | .045     | .057 | 1.15        | 1.45  |
| b2  | .075     | .083 | 1.90        | 2.10  |
| C   | .016     | .026 | 0.40        | 0.65  |
| C2  | .057     | .063 | 1.45        | 1.60  |
| D   | .543     | .551 | 13.80       | 14.00 |
| D1  | .488     | .500 | 12.40       | 12.70 |
| E   | .624     | .632 | 15.85       | 16.05 |
| E1  | .524     | .535 | 13.30       | 13.60 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| H   | .736     | .752 | 18.70       | 19.10 |
| L   | .094     | .106 | 2.40        | 2.70  |
| L1  | .047     | .055 | 1.20        | 1.40  |
| L2  | .039     | .045 | 1.00        | 1.15  |
| L3  | .010 BSC |      | 0.25 BSC    |       |
| L4  | .150     | .161 | 3.80        | 4.10  |