

Thyristor Module

$$V_{RRM} = 2 \times 1200V$$


$$I_{TAV} = 140A$$

$$V_T = 1.28V$$



Phase leg

Part number

MCMA140P1200TA

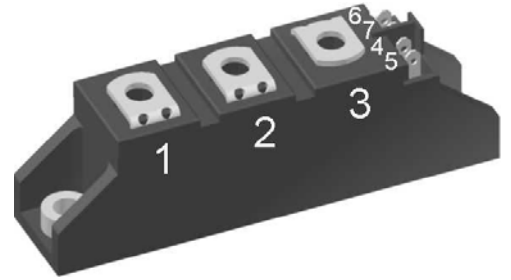

Backside: isolated

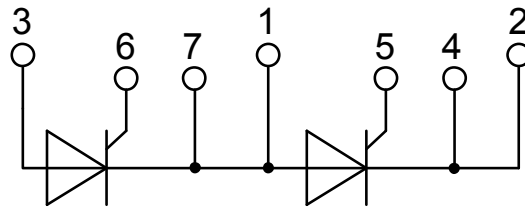

Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:


- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-240AA

- Isolation Voltage: 4800V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

| Thyristor | | | | Ratings | | | |
|----------------|--|---|--------------------------------|---------|------|-------------------|--|
| Symbol | Definition | Conditions | min. | typ. | max. | Unit | |
| $V_{RSM/DSM}$ | max. non-repetitive reverse/forward blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$ | | | 1300 | V | |
| $V_{RRM/DRM}$ | max. repetitive reverse/forward blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$ | | | 1200 | V | |
| I_{RD} | reverse current, drain current | $V_{RD} = 1200\text{ V}$ | $T_{VJ} = 25^{\circ}\text{C}$ | | 100 | μA | |
| | | $V_{RD} = 1200\text{ V}$ | $T_{VJ} = 140^{\circ}\text{C}$ | | 10 | mA | |
| V_T | forward voltage drop | $I_T = 150\text{ A}$ | $T_{VJ} = 25^{\circ}\text{C}$ | | 1.29 | V | |
| | | $I_T = 300\text{ A}$ | | | 1.63 | V | |
| | | $I_T = 150\text{ A}$ | $T_{VJ} = 125^{\circ}\text{C}$ | | 1.28 | V | |
| | | $I_T = 300\text{ A}$ | | | 1.70 | V | |
| I_{TAV} | average forward current | $T_C = 85^{\circ}\text{C}$ | $T_{VJ} = 140^{\circ}\text{C}$ | | 140 | A | |
| $I_{T(RMS)}$ | RMS forward current | 180° sine | | | 220 | A | |
| V_{T0} | threshold voltage | } for power loss calculation only | $T_{VJ} = 140^{\circ}\text{C}$ | | 0.85 | V | |
| r_T | slope resistance | | | | 2.8 | m Ω | |
| R_{thJC} | thermal resistance junction to case | | | | 0.22 | K/W | |
| R_{thCH} | thermal resistance case to heatsink | | | 0.20 | | K/W | |
| P_{tot} | total power dissipation | | $T_C = 25^{\circ}\text{C}$ | | 520 | W | |
| I_{TSM} | max. forward surge current | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$ | $T_{VJ} = 45^{\circ}\text{C}$ | | 2.40 | kA | |
| | | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$ | | 2.59 | kA | |
| | | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$ | $T_{VJ} = 140^{\circ}\text{C}$ | | 2.04 | kA | |
| | | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$ | | 2.21 | kA | |
| I^2t | value for fusing | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$ | $T_{VJ} = 45^{\circ}\text{C}$ | | 28.8 | kA ² s | |
| | | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$ | | 27.9 | kA ² s | |
| | | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$ | $T_{VJ} = 140^{\circ}\text{C}$ | | 20.8 | kA ² s | |
| | | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$ | | 20.2 | kA ² s | |
| C_J | junction capacitance | $V_R = 400\text{ V}$ $f = 1\text{ MHz}$ | $T_{VJ} = 25^{\circ}\text{C}$ | | 119 | pF | |
| P_{GM} | max. gate power dissipation | $t_p = 30\text{ }\mu\text{s}$ | $T_C = 140^{\circ}\text{C}$ | | 10 | W | |
| | | $t_p = 300\text{ }\mu\text{s}$ | | | 5 | W | |
| P_{GAV} | average gate power dissipation | | | | 0.5 | W | |
| $(di/dt)_{cr}$ | critical rate of rise of current | $T_{VJ} = 140^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 450\text{ A}$ | | | 150 | A/ μs | |
| | | $t_p = 200\text{ }\mu\text{s}; di_G/dt = 0.45\text{ A}/\mu\text{s};$ $I_G = 0.45\text{ A}; V_D = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 150\text{ A}$ | | | 500 | A/ μs | |
| $(dv/dt)_{cr}$ | critical rate of rise of voltage | $V_D = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise) | $T_{VJ} = 140^{\circ}\text{C}$ | | 1000 | V/ μs | |
| V_{GT} | gate trigger voltage | $V_D = 6\text{ V}$ | $T_{VJ} = 25^{\circ}\text{C}$ | | 1.5 | V | |
| | | | $T_{VJ} = -40^{\circ}\text{C}$ | | 1.6 | V | |
| I_{GT} | gate trigger current | $V_D = 6\text{ V}$ | $T_{VJ} = 25^{\circ}\text{C}$ | | 150 | mA | |
| | | | $T_{VJ} = -40^{\circ}\text{C}$ | | 200 | mA | |
| V_{GD} | gate non-trigger voltage | $V_D = \frac{2}{3} V_{DRM}$ | $T_{VJ} = 140^{\circ}\text{C}$ | | 0.2 | V | |
| I_{GD} | gate non-trigger current | | | | 10 | mA | |
| I_L | latching current | $t_p = 10\text{ }\mu\text{s}$ | $T_{VJ} = 25^{\circ}\text{C}$ | | 200 | mA | |
| | | $I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$ | | | | | |
| I_H | holding current | $V_D = 6\text{ V}$ $R_{GK} = \infty$ | $T_{VJ} = 25^{\circ}\text{C}$ | | 200 | mA | |
| t_{gd} | gate controlled delay time | $V_D = \frac{1}{2} V_{DRM}$ | $T_{VJ} = 25^{\circ}\text{C}$ | | 2 | μs | |
| | | $I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$ | | | | | |
| t_q | turn-off time | $V_R = 100\text{ V}; I_T = 150\text{ A}; V_D = \frac{2}{3} V_{DRM}$ $di/dt = 10\text{ A}/\mu\text{s}; dv/dt = 20\text{ V}/\mu\text{s}; t_p = 200\text{ }\mu\text{s}$ | $T_{VJ} = 140^{\circ}\text{C}$ | | 185 | μs | |


| Package TO-240AA | | | | Ratings | | |
|------------------|--|----------------------|-------------------------------------|---------|------|------|
| Symbol | Definition | Conditions | min. | typ. | max. | Unit |
| I_{RMS} | RMS current | per terminal | | | 200 | A |
| T_{stg} | storage temperature | | -40 | | 125 | °C |
| T_{VJ} | virtual junction temperature | | -40 | | 140 | °C |
| Weight | | | | 90 | | g |
| M_D | mounting torque | | 2.5 | | 4 | Nm |
| M_T | terminal torque | | 2.5 | | 4 | Nm |
| $d_{Spp/App}$ | creepage distance on surface striking distance through air | terminal to terminal | 13.0 | 9.7 | | mm |
| $d_{Spb/Apb}$ | | terminal to backside | 16.0 | 16.0 | | mm |
| V_{ISOL} | isolation voltage | t = 1 second | 50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA | | 4800 | V |
| | | t = 1 minute | | | 4000 | V |

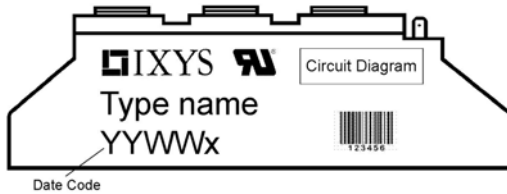
Part number

- M = Module
- C = Thyristor (SCR)
- M = Thyristor
- A = (up to 1800V)
- 140 = Current Rating [A]
- P = Phase leg
- 1200 = Reverse Voltage [V]
- TA = TO-240AA-1B


| Ordering | Part Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|----------------|--------------------|---------------|----------|----------|
| Standard | MCMA140P1200TA | MCMA140P1200TA | Box | 6 | 512625 |

| Similar Part | Package | Voltage class |
|----------------|-------------|---------------|
| MCMA140P1400TA | TO-240AA-1B | 1400 |


Equivalent Circuits for Simulation
** on die level*
 $T_{VJ} = 140^\circ\text{C}$

Thyristor

| | | | |
|-------------|--------------------|------|----|
| $V_{0\max}$ | threshold voltage | 0.85 | V |
| $R_{0\max}$ | slope resistance * | 1.6 | mΩ |

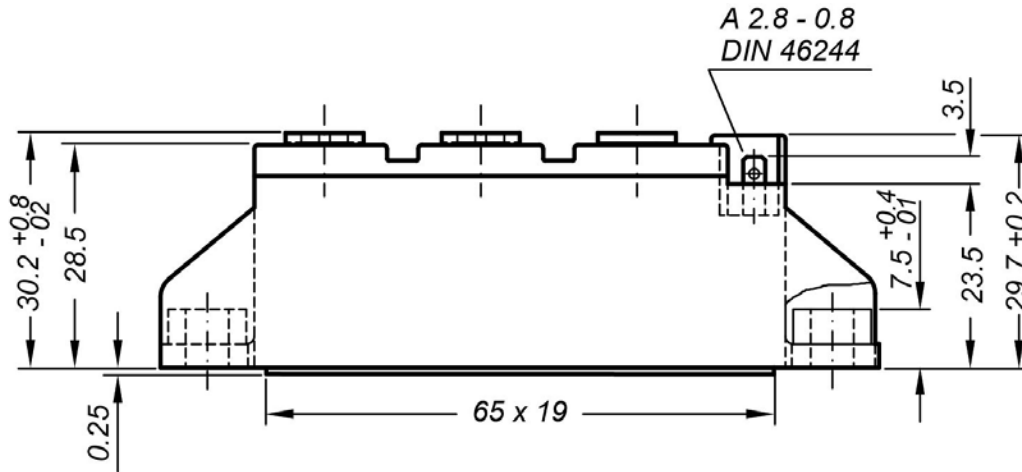
Outlines TO-240AA

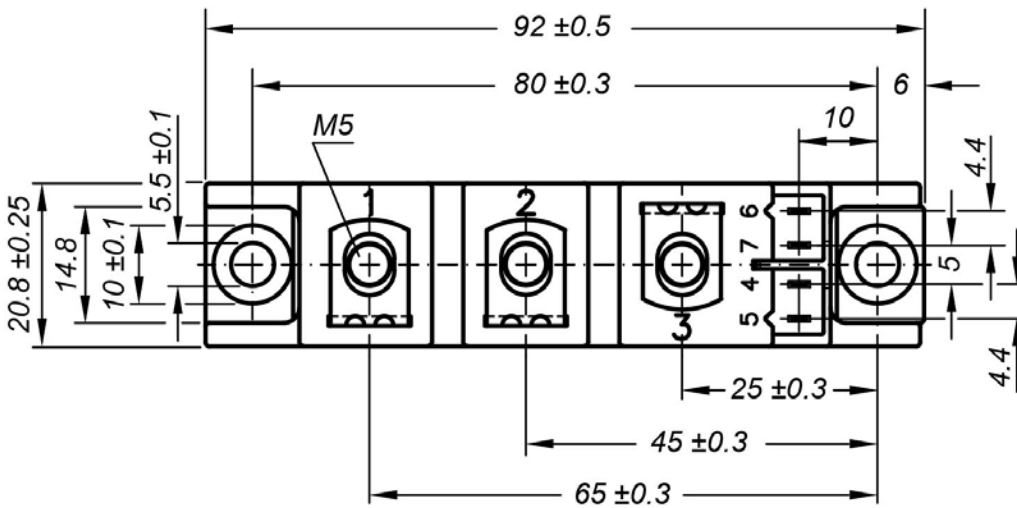

General tolerance: DIN ISO 2768 class „c“



Optional accessories: Keyed gate/cathode twin plugs
 Wire length: 350 mm, gate = white, cathode = red
 UL 758, style 3751
 Type **ZY 200L** (L = Left for pin pair 4/5)
 Type **ZY 200R** (R = Right for pin pair 6/7)

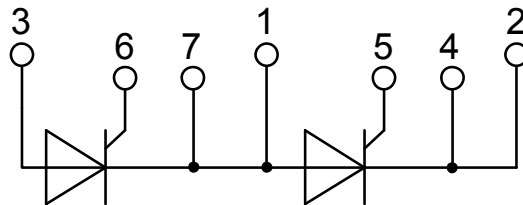

Thyristor

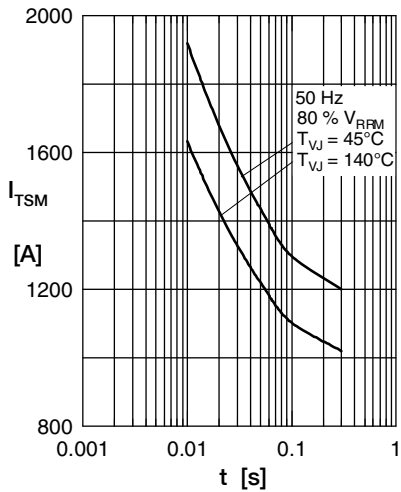


Fig. 1 Surge overload current
 I_{TSM} : Crest value, t : duration

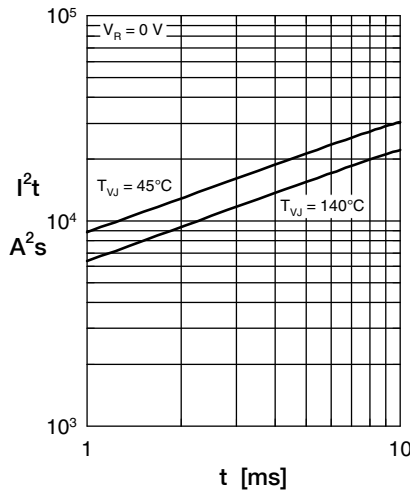


Fig. 2 I^2t versus time (1-10 ms)

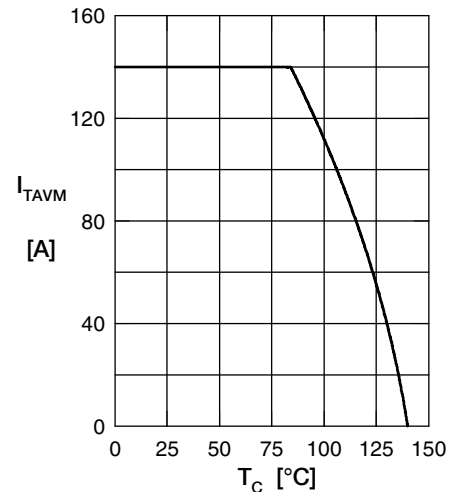


Fig. 3 Maximum forward current at case temperature

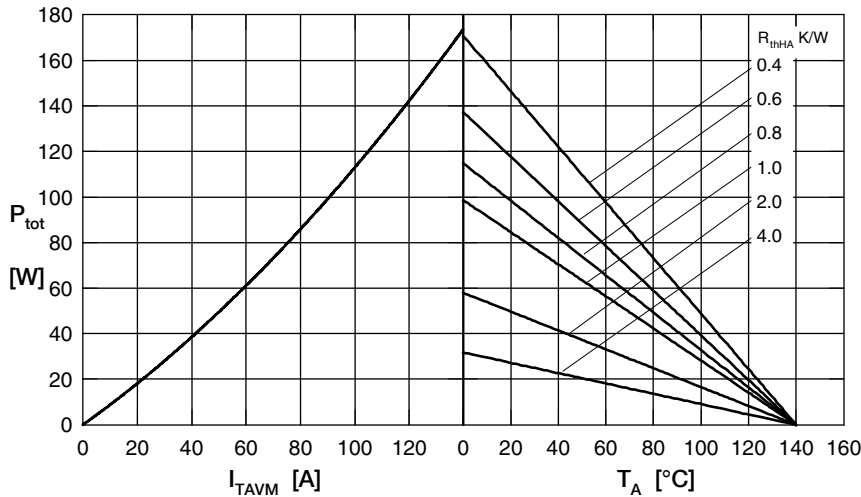


Fig. 4 Power dissipation vs. forward current and ambient temperature

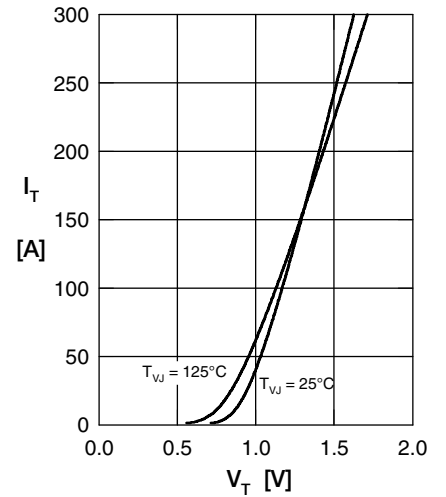


Fig. 5 Forward current I_T versus V_T

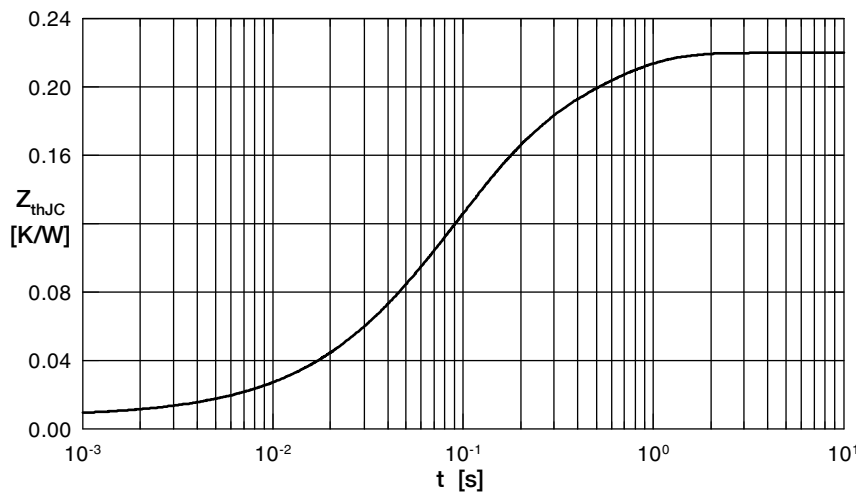


Fig. 6 Transient thermal impedance junction to case

Constants for Z_{thjC} calculation:

| i | R_{thi} [K/W] | t_i [s] |
|---|-----------------|-----------|
| 1 | 0.0073 | 0.0001 |
| 2 | 0.0128 | 0.031 |
| 3 | 0.1329 | 0.084 |
| 4 | 0.067 | 0.42 |