

KEMET®

Ceramic Leaded Capacitors

F-3101F 06/05

Multilayer Ceramic Capacitors/Axial & Radial	Page
General Information	3
Conformally Coated/Axial & Radial	
Performance Characteristics	
General Specifications	4
“Aximax” Conformally Coated Axial	
Outline Drawing	5
Dimensions	5
Ordering Information	5
Marking	5
Part Number Reference	6-8
“Golden Max” Conformally Coated Radial	
Outline Drawing	9
Dimensions	9
Ordering Information	9
Optional Lead Configurations	10
Marking	11
Part Number Reference	11-14
“High Voltage Golden Max” Conformally Coated Radial	
Outline Drawing	15
Dimensions	15
Ordering Information	15
Marking	15
Part Number Reference	16-19
Molded/Axial & Radial	
Performance Characteristics	
General Specifications	20
Ceramic Molded Standard/Axial & Radial	
Outline Drawing	21
Dimensions	21
Ordering Information	22
Marking	22
Part Number Reference	23-26
MIL-PRF-20	
Outline Drawing	27
Dimensions	27
Ordering Information	28
Marking	28
Part Number Reference	29-32
MIL-C-11015 (CK) & MIL-PRF-39014 (CKR)	
Outline Drawing	33
Dimensions	33
Ordering Information	34
Marking	34
Part Number Reference	35-38
Axial Tape & Reel Packaging Specifications	39
Radial Tape & Reel Packaging Specifications	40
Leaded Packaging Quantities	41
Application Notes for Multilayer Ceramic Capacitors	42-46

NOTICE

Although the information in this catalog has been carefully checked for accuracy, and is believed to be correct and current, no warranty, either express or implied, is made as to either its applicability to, or its compatibility with, specific requirements; nor does KEMET Electronics Corporation assume any responsibility for correctness of this information, nor for damages consequent to its use. All design characteristics, specifications, tolerances, and the like are subject to change without notice.

Multilayer ceramic capacitors are available in a variety of physical sizes and configurations, including leaded devices and surface mounted chips. Leaded styles include molded and conformally coated parts with axial and radial leads. However, the basic capacitor element is similar for all styles. It is called a chip and consists of formulated dielectric materials which have been cast into thin layers, interspersed with metal electrodes alternately exposed on opposite

edges of the laminated structure. The entire structure is fired at high temperature to produce a monolithic block which provides high capacitance values in a small physical volume. After firing, conductive terminations are applied to opposite ends of the chip to make contact with the exposed electrodes. Termination materials and methods vary depending on the intended use.

TEMPERATURE CHARACTERISTICS

Ceramic dielectric materials can be formulated with a wide range of characteristics. The EIA standard for ceramic dielectric capacitors (RS-198) divides ceramic dielectrics into the following classes:

Class I: Temperature compensating capacitors, suitable for resonant circuit application or other applications where high Q and stability of capacitance characteristics are required. Class I capacitors have predictable temperature coefficients and are not effected by voltage, frequency or time. They are made from materials which are not ferro-electric, yielding superior stability but low volumetric efficiency. Class I capacitors are the most stable type available, but have the lowest volumetric efficiency.

Class II: Stable capacitors, suitable for bypass or coupling applications or frequency discriminating circuits where Q and stability of capacitance characteristics are not of major importance. Class II capacitors have temperature characteristics of $\pm 15\%$ or less. They are made from materials which are ferro-electric, yielding higher volumetric efficiency but less stability. Class II capacitors are affected by temperature, voltage, frequency and time.

Class III: General purpose capacitors, suitable for by-pass coupling or other applications in which dielectric losses, high insulation resistance and stability of capacitance characteristics are of little or no importance. Class III capacitors are similar to Class II capacitors except for temperature characteristics, which are greater than $\pm 15\%$. Class III capacitors have the highest volumetric efficiency and poorest stability of any type.

KEMET leaded ceramic capacitors are offered in the three most popular temperature characteristics:

C0G: Class I, with a temperature coefficient of 0 ± 30 ppm per degree C over an operating temperature range of -55°C to $+125^{\circ}\text{C}$ (Also known as "NP0").

X7R: Class II, with a maximum capacitance change of $\pm 15\%$ over an operating temperature range of -55°C to $+125^{\circ}\text{C}$.

Z5U: Class III, with a maximum capacitance change of $+22\% - 56\%$ over an operating temperature range of $+10^{\circ}\text{C}$ to $+85^{\circ}\text{C}$.

Specified electrical limits for these three temperature characteristics are shown in Table 1.

SPECIFIED ELECTRICAL LIMITS

PARAMETER	TEMPERATURE CHARACTERISTICS		
	C0G	X7R	Z5U
Dissipation Factor: Measured at following conditions: C0G — 1 kHz and 1 vrms if capacitance > 1000 pF 1 MHz and 1 vrms if capacitance ≤ 1000 pF X7R — 1 kHz and 1 vrms* or if extended cap range 0.5 vrms Z5U — 1 kHz and 0.5 vrms	0.15%	2.5%	4.0%
Dielectric Strength: 2.5 times rated DC voltage.	Pass Subsequent IR Test		
Insulation Resistance (IR): At rated DC voltage, whichever of the two is smaller	1,000 M Ω - μF or 100 G Ω	1,000 M Ω - μF or 100 G Ω	1,000 M Ω - μF or 10 G Ω
Temperature Characteristics: Range, $^{\circ}\text{C}$ Capacitance Change without DC voltage	-55 to $+125$ 0 ± 30 ppm/ $^{\circ}\text{C}$	-55 to $+125$ $\pm 15\%$	$+10$ to $+85$ $+22\%$, -56%

* 1 MHz and 1 vrms if capacitance ≤ 100 pF on military product.

Table 1

GENERAL SPECIFICATIONS

Working Voltage:

Axial (WVDC)	Radial (WVDC)
C0G – 50 & 100	50, 100, 200, 500, 1k, 1.5k, 2k, 2.5k, 3k
X7R – 50 & 100	50, 100, 200, 500, 1k, 1.5k, 2k, 2.5k, 3k
Z5U – 50 & 100	50 & 100

Temperature Characteristics:

C0G – 0 ± 30 PPM / °C from - 55°C to + 125°C (1)
X7R – $\pm 15\%$ from - 55°C to + 125°C
Z5U – $+ 22\%$ / -56% from + 10°C to + 85°C

Capacitance Tolerance:

C0G – $\pm 0.5\text{pF}$, $\pm 1\%$, $\pm 2\%$, $\pm 5\%$, $\pm 10\%$
X7R – $\pm 10\%$, $\pm 20\%$, $+80\%$ / -20%, $+100\%$ / -0%
Z5U – $\pm 20\%$, $+80\%$ / -20%

Construction:

Epoxy encapsulated - meets flame test requirements of UL Standard 94V-0.

High-temperature solder - meets EIA RS-198, Method 302, Condition B (260°C for 10 seconds)

Lead Material:

100% matte tin (Sn) with nickel (Ni) underplate and steel core.

Solderability:

EIA RS-198, Method 301, Solder Temperature: 230°C $\pm 5^\circ\text{C}$.
Dwell time in solder = $7 \pm \frac{1}{2}$ seconds.

Terminal Strength:

EIA RS-198, Method 303, Condition A (2.2kg)

ELECTRICAL

Capacitance @ 25°C:

Within specified tolerance and following test conditions.

C0G – $> 1000\text{pF}$ with 1.0 vrms @ 1 kHz
 $\leq 1000\text{pF}$ with 1.0 vrms @ 1 MHz
X7R – with 1.0 vrms @ 1 kHz
Z5U – with 1.0 vrms @ 1 kHz

Dissipation Factor @ 25°C:

Same test conditions as capacitance.

C0G – 0.15% maximum
X7R – 2.5% maximum
Z5U – 4.0% maximum

Insulation Resistance @ 25°C:

EIA RS-198, Method 104, Condition A <1kV

C0G – 100k Megohm or 1000 Megohm x μF , whichever is less.
 $\leq 500\text{V}$ test @ rated voltage, $\geq 1\text{kV}$ test @ 500V
X7R – 100k Megohm or 1000 Megohm x μF , whichever is less.
 $\leq 500\text{V}$ test @ rated voltage, $\geq 1\text{kV}$ test @ 500V
Z5U – 10k Megohm or 1000 Megohm x μF , whichever is less.

Dielectric Withstanding Voltage:

EIA RS-198, Method 103

$\leq 200\text{V}$ test @ 250% of rated voltage for 5 seconds with current limited to 50mA.
500V test @ 150% of rated voltage for 5 seconds with current limited to 50mA.
 $\geq 1000\text{V}$ test @ 120% of rated voltage for 5 seconds with current limited to 50mA.

ENVIRONMENTAL

Vibration:

EIA RS-198, Method 304, Condition D (10-2000Hz; 20g)

Shock:

EIA RS-198, Method 305, Condition I (100g)

Life Test:

EIA RS-198, Method 201, Condition D.

$\leq 200\text{V}$

C0G – 200% of rated voltage @ +125°C
X7R – 200% of rated voltage @ +125°C
Z5U – 200% of rated voltage @ +85°C

$\geq 500\text{V}$

C0G – rated voltage @ +125°C
X7R – rated voltage @ +125°C

Post Test Limits @ 25°C are:

Capacitance Change:

C0G ($\leq 200\text{V}$) – $+3\%$ or 0.25pF, whichever is greater.
C0G ($\geq 500\text{V}$) – $+3\%$ or 0.50pF, whichever is greater.
X7R – $+ 20\%$ of initial value (2)
Z5U – $+ 30\%$ of initial value (2)

Dissipation Factor:

C0G – 0.15% maximum
X7R – 2.5% maximum
Z5U – 4.0% maximum

Insulation Resistance:

C0G – 10k Megohm or 100 Megohm x μF , whichever is less.
 $\geq 1\text{kV}$ tested @ 500V.
X7R – 10k Megohm or 100 Megohm x μF , whichever is less.
 $\geq 1\text{kV}$ tested @ 500V.
Z5U – 1k Megohm or 100 Megohm x μF , whichever is less.

Moisture Resistance:

EIA RS-198, Method 204, Condition A (10 cycles without applied voltage.)

Post Test Limits @ 25°C are:

Capacitance Change:

C0G ($\leq 200\text{V}$) – $+3\%$ or 0.25pF, whichever is greater.
C0G ($\geq 500\text{V}$) – $+3\%$ or 0.50pF, whichever is greater.
X7R – $+ 20\%$ of initial value (2)
Z5U – $+ 30\%$ of initial value (2)

Dissipation Factor:

C0G – 0.25% maximum
X7R – 3.0% maximum
Z5U – 4.0% maximum

Insulation Resistance:

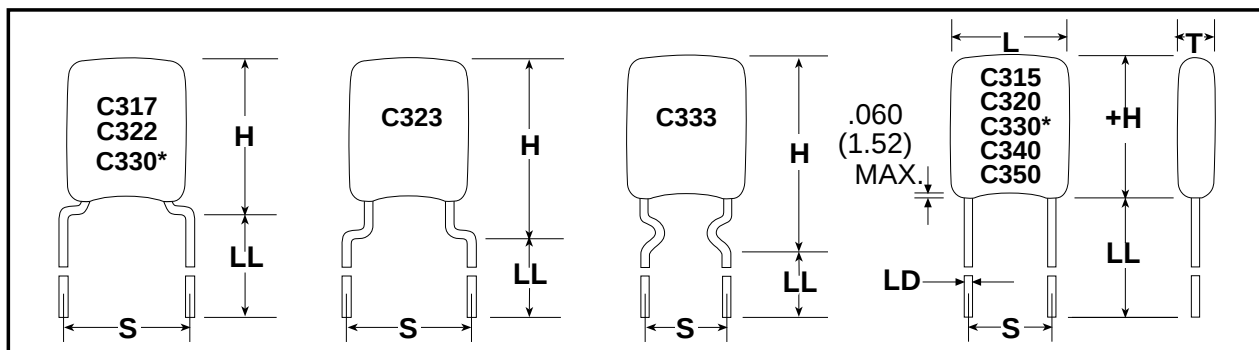
C0G – 10k Megohm or 100 Megohm x μF , whichever is less.
 $\leq 500\text{V}$ test @ rated voltage, $\geq 1\text{kV}$ test @ 500V.
X7R – 10k Megohm or 100 Megohm x μF , whichever is less.
 $\geq 500\text{V}$ test @ rated voltage, $\geq 1\text{kV}$ test @ 500V.
Z5U – 1k Megohm or 100 Megohm x μF , whichever is less.

Thermal Shock:

EIA RS-198, Method 202, Condition B (C0G & X7R: -55°C to +125°C); Condition A (Z5U: -55°C to 85°C)

- (1) $+53$ PPM -30 PPM/ °C from +25°C to -55°C, + 60 PPM below 10pF.
- (2) X7R and Z5U dielectrics exhibit aging characteristics; therefore, it is highly recommended that capacitors be deaged for 2 hours at 150°C and stabilized at room temperature for 48 hours before capacitance measurements are made.

STANDARD LEAD CONFIGURATION – OUTLINE DRAWINGS



Drawings are not to scale. See table below for dimensions. + H dimension does not include meniscus.

* Lead configuration depends on capacitance value. See next page.

DIMENSIONS — INCHES & MILLIMETERS


Case Size	L Max. Inches (mm)	H. Max Inches (mm)	Standard T Max. Inches (mm)	High Voltage T Max. Inches (mm)	S(1) ±.030 (.78) Inches (mm)	LD +.004(.10) -.001(.025) Inches (mm)
C315	0.150 (3.81)	0.210 (5.33)	0.130 (3.30)	0.15 (3.81)	0.100 (2.54)	0.020 (.51)
C317	0.150 (3.81)	0.230 (5.84)	0.130 (3.30)	0.15 (3.81)	0.200 (5.08)	0.020 (.51)
C320	0.200 (5.08)	0.260 (6.60)	#0.150 (3.81)	0.200 (5.08)	0.100 (2.54)	0.020 (.51)
C322	0.200 (5.08)	0.260 (6.60)	0.150 (3.81)	0.200 (5.08)	0.200 (5.08)	0.020 (.51)
C323	0.200 (5.08)	0.320 (8.13)	0.150 (3.81)	0.200 (5.08)	0.200 (5.08)	0.020 (.51)
C330	0.300 (7.62)	0.360 (9.14)	0.200 (5.08)	0.250 (6.35)	0.200 (5.08)	0.020 (.51)
C333	0.300 (7.62)	0.390 (9.91)	0.200 (5.08)	0.250 (6.35)	0.200 (5.08)	0.020 (.51)
C340	0.400 (10.16)	0.460 (11.68)	0.200 (5.08)	0.270 (6.86)	0.200 (5.08)	0.020 (.51)
C350	0.500 (12.70)	0.560 (14.22)	0.250 (6.35)	0.270 (6.86)	0.400 (10.16)	0.025 (.64)

Note: 1 inch = 25.4mm.

Note (1): Measured at seating plane.























#0.160" (4.064mm) for 4.7 - 10.0μF

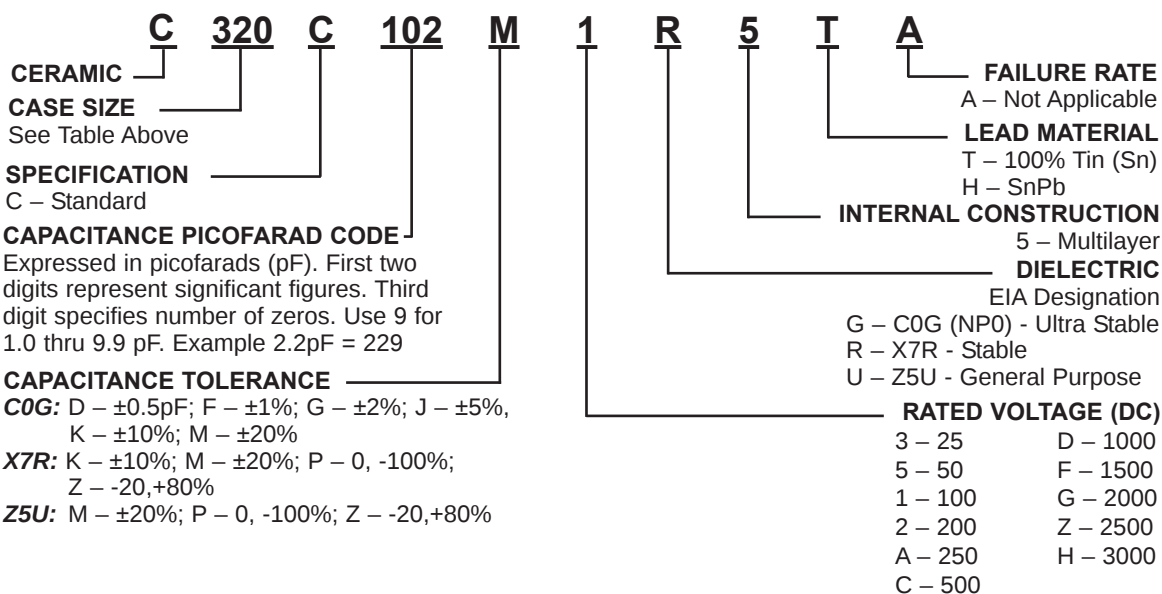ORDERING INFORMATION




OPTIONAL CONFIGURATIONS BY LEAD SPACING

The preferred lead wire configurations are shown on previous page. However, additional configurations are available. All available options are shown below grouped by lead spacing.

Lead Spacing .100" ± .030	C 3 1 5	C 3 1 6	C 3 2 0	C 3 2 4	C 3 2 6	
						
Lead Spacing .200" ± .030	C 3 1 7	C 3 1 8	C 3 2 2	C 3 2 3		
						
Lead Spacing .200" ± .030	C 3 2 5	C 3 2 7	C 3 2 8			
						
Lead Spacing .200" ± .030	C 3 3 0	C 3 3 3	C 3 3 5	C 3 3 6	C 3 4 0	C 3 4 6
						
Lead Spacing .250" ± .030 (Available in bulk only)	C 3 2 1	C 3 3 1	Lead Spacing .400" ± .030 (Available in bulk only)		C 3 5 0	C 3 5 6
						

Note: Non-standard lead lengths are available in bulk only.

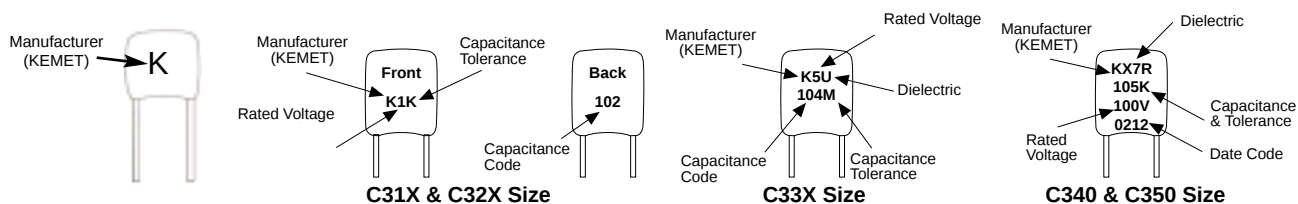CAPACITOR MARKINGS



RATINGS & PART NUMBER REFERENCE: ULTRA-STABLE TEMPERATURE CHARACTERISTICS – C0G/NPO

Style			C31X					C32X						C33X										C34X							C35X						
Cap	Cap Code	Cap Tol	WVDC					WVDC						WVDC										WVDC							WVDC						
			50	100	200	500	1k	50	100	200	500	1k	1.5k	2k	50	100	200	500	1k	1.5k	2k	2.5k	3k	50	100	200	500	1k	2k	3k	50	100	200	500	1k	2k	3k
1.0pF	109	D																																			
1.1	119	D																																			
1.2	129	D																																			
1.3	139	D																																			
1.5	159	D																																			
1.6	169	D																																			
1.8	189	D																																			
2.0	209	D																																			
2.2	229	D																																			
2.4	249	D																																			
2.7	279	D																																			
3.0	309	D																																			
3.3	339	D																																			
3.6	369	D																																			
3.9	399	D																																			
4.3	439	D																																			
4.7	479	D																																			
5.1	519	D																																			
5.6	569	D																																			
6.2	629	D																																			
6.8	689	D																																			
7.5	759	D																																			
8.2	829	D																																			
9.1	919	D																																			
10	100	J,K																																			
11	110	J,K																																			
12	120	J,K																																			
13	130	J,K																																			
15	150	J,K																																			
16	160	J,K																																			
18	180	J,K																																			
20	200	J,K																																			
22	220	J,K																																			
24	240	G,J,K																																			
27	270	G,J,K																																			
30	300	G,J,K																																			
33	330	G,J,K																																			
36	360	G,J,K																																			
39	390	G,J,K																																			
43	430	G,J,K																																			
47	470	G,J,K																																			
51	510	G,J,K																																			
56	560	F,G,J																																			
62	620	F,G,J																																			
68	680	F,G,J																																			
75	750	F,G,J																																			
82	820	F,G,J																																			
91	910	F,G,J																																			

For packaging information, see pages 40 and 41.

RATINGS & PART NUMBER REFERENCE: ULTRA-STABLE TEMPERATURE CHARACTERISTICS — C0G/NPO CONT.

Style			C31X					C32X						C33X									C34X							C35X							
Cap	Cap Code	Cap Tol	WVDC					WVDC						WVDC									WVDC							WVDC							
			50	100	200	500	1k	50	100	200	500	1k	1.5k	2k	50	100	200	500	1k	1.5k	2k	2.5k	3k	50	100	200	500	1k	2k	3k	50	100	200	500	1k	2k	3k
100	101	F,G,J																																			
110	111	F,G,J																																			
120	121	F,G,J																																			
130	131	F,G,J																																			
150	151	F,G,J																																			
160	161	F,G,J																																			
180	181	F,G,J																																			
200	201	F,G,J																																			
220	221	F,G,J																																			
240	241	F,G,J																																			
270	271	F,G,J																																			
300	301	F,G,J																																			
330	331	F,G,J																																			
360	361	F,G,J																																			
390	391	F,G,J																																			
430	431	F,G,J																																			
470	471	F,G,J																																			
510	511	F,G,J																																			
560	561	F,G,J																																			
620	621	F,G,J																																			
680	681	F,G,J																																			
750	751	F,G,J																																			
820	821	F,G,J																																			
910	911	F,G,J																																			
1000	102	F,G,J																																			
1100	112	F,G,J																																			
1200	122	F,G,J																																			
1300	132	F,G,J																																			
1500	152	F,G,J																																			
1600	162	F,G,J																																			
1800	182	F,G,J																																			
2000	202	F,G,J																																			
2200	222	F,G,J																																			
2400	242	F,G,J																																			
2700	272	F,G,J																																			
3000	302	F,G,J																																			
3300	332	F,G,J																																			
3600	362	F,G,J																																			
3900	392	F,G,J																																			
4300	432	F,G,J																																			
4700	472	F,G,J																																			
5100	512	F,G,J																																			
5600	562	F,G,J																																			
6200	622	F,G,J																																			
6800	682	F,G,J																																			
7500	752	F,G,J																																			
8200	822	F,G,J																																			
9100	912	F,G,J																																			
.010uF	103	F,G,J																																			
.015	123	F,G,J																																			
.015	153	F,G,J																																			
.018	183	F,G,J																																			
.022	223	F,G,J																																			
.027	273	F,G,J																																			
.033	333	F,G,J																																			
.039	393	F,G,J																																			
.047	473	F,G,J																																			
.056	563	F,G,J																																			
.068	683	F,G,J																																			
.082	823	F,G,J																																			
.10	104	F,G,J																																			
.12	124	F,G,J																																			

		Style:	C31X								C32X									C33X									
Cap	Cap Code	Cap Tol	WVDC								WVDC									WVDC									
			25	50	100	200	250	500	1k	25	50	100	200	250	500	1k	1.5k	2k	25	50	100	200	250	500	1k	2k	3k		
10pF	100	K,M,P,Z																											
12	120	K,M,P,Z																											
15	150	K,M,P,Z																											
18	180	K,M,P,Z																											
22	220	K,M,P,Z																											
27	270	K,M,P,Z																											
33	330	K,M,P,Z																											
39	390	K,M,P,Z																											
47	470	K,M,P,Z																											
56	560	K,M,P,Z																											
68	680	K,M,P,Z																											
82	820	K,M,P,Z																											
100	101	K,M,P,Z																											
120	121	K,M,P,Z																											
150	151	K,M,P,Z																											
180	181	K,M,P,Z																											
220	221	K,M,P,Z																											
270	271	K,M,P,Z																											
330	331	K,M,P,Z																											
390	391	K,M,P,Z																											
470	471	K,M,P,Z																											
560	561	K,M,P,Z																											
680	681	K,M,P,Z																											
820	821	K,M,P,Z																											
1000	102	K,M,P,Z																											
1200	122	K,M,P,Z																											
1500	152	K,M,P,Z																											
1800	182	K,M,P,Z																											
2200	222	K,M,P,Z																											
2700	272	K,M,P,Z																											

Currently in catalog

- (1) Thickness max = 0.160" (4.06mm)
- (2) Requires straight leads (all other C33X's require bent leads)

RATINGS & PART NUMBER REFERENCE: STABLE TEMPERATURE CHARACTERISTICS — X7R

Golden Max - X7R																				
		Style:	C34X										C35X							
Cap	Cap Code	Cap Tol	WVDC										WVDC							
			25	50	100	200	250	500	1k	2k	3k	25	50	100	200	250	500	1k	2k	3k
10pF	100	K,M,P,Z																		
12	120	K,M,P,Z																		
15	150	K,M,P,Z																		
18	180	K,M,P,Z																		
22	220	K,M,P,Z																		
27	270	K,M,P,Z																		
33	330	K,M,P,Z																		
39	390	K,M,P,Z																		
47	470	K,M,P,Z																		
56	560	K,M,P,Z																		
68	680	K,M,P,Z																		
82	820	K,M,P,Z																		
100	101	K,M,P,Z																		
120	121	K,M,P,Z																		
150	151	K,M,P,Z																		
180	181	K,M,P,Z																		
220	221	K,M,P,Z																		
270	271	K,M,P,Z																		
330	331	K,M,P,Z																		
390	391	K,M,P,Z																		
470	471	K,M,P,Z																		
560	561	K,M,P,Z																		
680	681	K,M,P,Z																		
820	821	K,M,P,Z																		
1000	102	K,M,P,Z																		
1200	122	K,M,P,Z																		
1500	152	K,M,P,Z																		
1800	182	K,M,P,Z																		
2200	222	K,M,P,Z																		
2700	272	K,M,P,Z																		
3300	332	K,M,P,Z																		
3900	392	K,M,P,Z																		
4700	472	K,M,P,Z																		
5600	562	K,M,P,Z																		
6800	682	K,M,P,Z																		
8200	822	K,M,P,Z																		
.010uF	103	K,M,P,Z																		
.012	123	K,M,P,Z																		
.015	153	K,M,P,Z																		
.018	183	K,M,P,Z																		
.022	223	K,M,P,Z																		
.027	273	K,M,P,Z																		
.033	333	K,M,P,Z																		
.039	393	K,M,P,Z																		
.047	473	K,M,P,Z																		
.056	563	K,M,P,Z																		
.068	683	K,M,P,Z																		
.082	823	K,M,P,Z																		
.10	104	K,M,P,Z																		
.12	124	K,M,P,Z																		
.15	154	K,M,P,Z																		
.18	184	K,M,P,Z																		
.22	224	K,M,P,Z																		
.27	274	K,M,P,Z																		
.33	334	K,M,P,Z																		
.39	394	K,M,P,Z																		
.47	474	K,M,P,Z																		
.56	564	K,M,P,Z																		
.68	684	K,M,P,Z																		
.82	824	K,M,P,Z																		
1.0	105	K,M,P,Z																		
1.2	125	K,M,P,Z																		
1.5	155	K,M,P,Z																		
1.8	185	K,M,P,Z																		
2.2	225	K,M,P,Z																		
2.7	275	K,M,P,Z																		
3.3	335	K,M,P,Z																		
3.9	395	K,M,P,Z																		
4.7	475	K,M,P,Z																		
5.6	565	K,M,P,Z																		
6.8	685	K,M,P,Z																		
10	106	K,M,P,Z																		

 Newly Released Parts
 Currently in catalog

RATINGS & PART NUMBER REFERENCE

GENERAL PURPOSE TEMPERATURE CHARACTERISTIC – Z5U

Style			C31X			C32X			C33X			C34X			C35X		
Cap	Cap Code	Cap Tol	WWDC			WWDC			WWDC			WWDC			WWDC		
			50	100	200	50	100	200	50	100	200	50	100	200	50	100	200
1000pF	102	M,P,Z															
1200	122	M,P,Z															
1500	152	M,P,Z															
1800	182	M,P,Z															
2200	222	M,P,Z															
2700	272	M,P,Z															
3300	332	M,P,Z															
3900	392	M,P,Z															
4700	472	M,P,Z															
5600	562	M,P,Z															
6800	682	M,P,Z															
8200	822	M,P,Z															
.010uF	103	M,P,Z															
.012	123	M,P,Z															
.015	153	M,P,Z															
.018	183	M,P,Z															
.022	223	M,P,Z															
.027	273	M,P,Z															
.033	333	M,P,Z															
.039	393	M,P,Z															
.047	473	M,P,Z															
.056	563	M,P,Z															
.068	683	M,P,Z															
.082	823	M,P,Z															
.10	104	M,P,Z															
.12	124	M,P,Z															
.15	154	M,P,Z															
.18	184	M,P,Z															
.22	224	M,P,Z															
.27	274	M,P,Z															
.33	334	M,P,Z															
.39	394	M,P,Z															
.47	474	M,P,Z															
.56	564	M,P,Z															
.68	684	M,P,Z															
.82	824	M,P,Z															
1.0	105	M,P,Z															
1.2	125	M,P,Z															
1.5	155	M,P,Z															
1.8	185	M,P,Z															
2.2	225	M,P,Z															
2.7	275	M,P,Z															
3.3	335	M,P,Z															
3.9	395	M,P,Z															
4.7	475	M,P,Z															
5.6	565	M,P,Z															
6.8	685	M,P,Z															

C330 shoulder bend lead configuration is standard for these cap codes.

For packaging information, see pages 40 and 41.

Ceramic Radial Lead Tape and Reel Packaging

KEMET offers standard reeling of Molded and Conformally Coated Radial Ledged Ceramic Capacitors for automatic insertion per EIA specification RS-468. Parts are taped to a tagboard carrier strip, and wound on a reel as shown in Figure 1. Kraft paper interleaving is inserted between the layers of capacitors on the reel. Ammopack is also available, with the same lead tape configuration and package quantities.

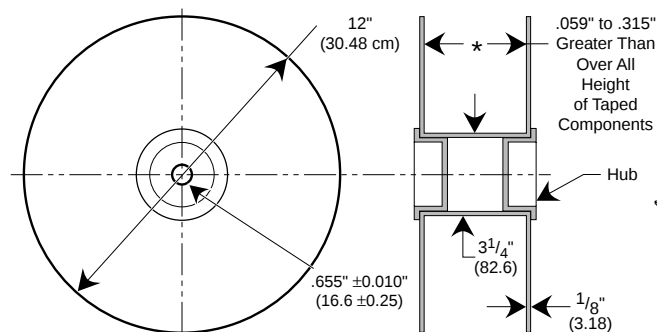


Figure 3: Standard Reel

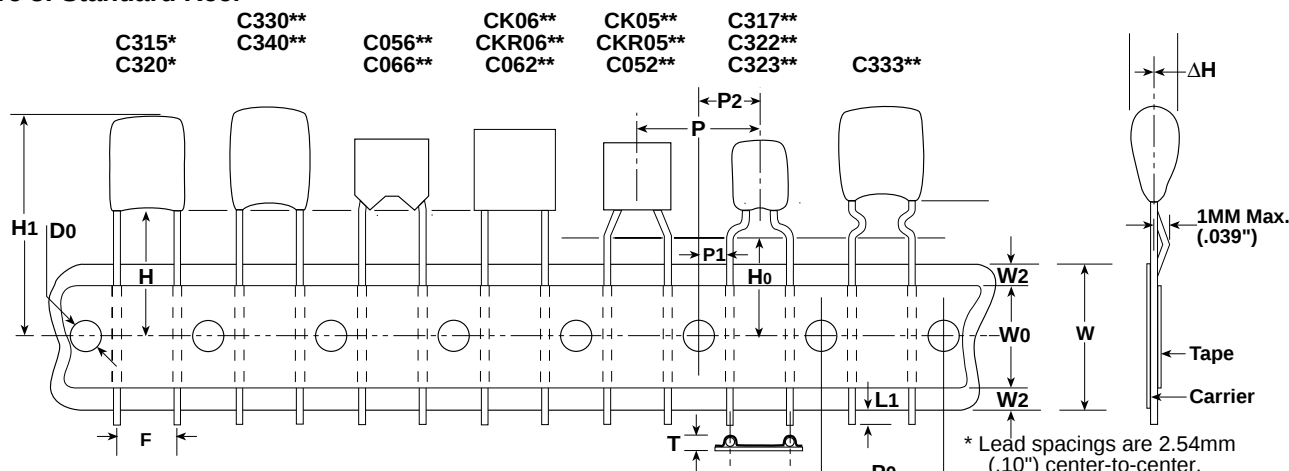
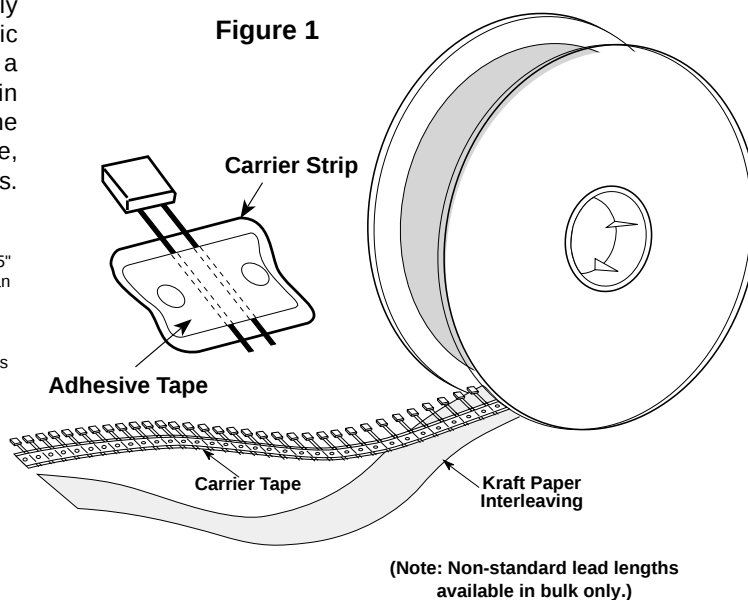


Figure 2: Lead Tape Configuration (See Table Below)

Ceramic Radial Tape and Reel Dimensions in Millimeters & (Inches)

Dimension	Symbol	Nominal mm (inch)	Tolerance mm (inch)	Dimension	Symbol	Nominal mm (inch)	Tolerance mm (inch)
Sprocket Hole Diameter	D0	4.0 (.157)	± 0.2 (.008)	Height to Seating Plane (formed leads) (2)	H0	7301 7303 16.0 (.630) 18.0 (.709)	7301 7303 ±0.5 (.020) Minimum
Sprocket Hole Pitch	P0	12.7 (.500)	± 0.3 (.012)	Component Alignment	Δh	4.0 (.157)	±0.2 (.008)
Component Pitch	P	12.7 (.500)	± 0.3 (.012)	Lead Protrusion	L1	1.0 (.039)	Maximum
Lead Spacing (1)	F	5.08 (.20) 2.54 (.10)	+0.6 -0.2 (+.024 -.008)	Composite Tape Thickness	t	0.7 (.051)	±0.2 (.008)
Sprocket Hole Center to Lead Center (1)	P1	3.81 (.150) 5.08 (.200)	± 0.7 (.028)	Overall Tape and Lead Thickness	T	1.5 (.059)	Maximum
Sprocket Hole Center to Component Center	P2	6.35 (.250)	± 1.3 (.051)	Carrier Tape Width	W	18.0 (.709)	+1.0 - 0.5 (+.039 -.020)
Height to Seating Plane (straight leads) (2)	H	7301 7303 16.0 (.630) 18.0 (.709)	7301 7303 ±0.5 (.020) Minimum	Hold-Down Tape Width	W0	5.0 (.197)	Minimum
Component Height Above Tape Center	H1	32.2 (1.27)	Maximum	Hold-Down Tape Location	W2	3.0 (.118)	Maximum

(1) Measured at the egress from the carrier tape, on the component side.

(2) Determined by a 4 digit suffix placed at the end of the part number, as follows:

7301 = Recommended for parts with formed leads.

7303 = Recommended for parts with straight leads.

Example: C322C104K5R5CA7301

Example: C320C104K5R5CA7303

AXIMAX & GOLDMAX PACKAGING						
KEMET Series	Military Style	Military Specification	Standard (1) Bulk Quantity	Ammo Pack Quantity Maximum	Maximum Reel Quantity	Reel Size
C31X			500/Bag	2500	2500	12"
C32X			500/Bag	2500	2500	12"
C33X			250/Bag	1500	1500	12"
C340			100/Bag	1000	1000	12"
C350			50/Bag	N/A	500	12"
C410			300/Box	4000	5000	12"
C412			200/Box	4000	5000	12"
C420			300/Box	4000	5000	12"
C430			200/Box	2000	2500	12"
C440			200/Box	2000	2500	12"