

1616-1103 (3V)

XNOVA Cube™ SMD LED



Table of Contents

| | |
|--|----|
| Technology Overview | 2 |
| Product Selection Table | 3 |
| Operating Characteristics | 4 |
| Chromaticity Diagram | 5 |
| Color Ranks | 5 |
| Chromaticity Coordinate Group | 6 |
| Characteristics Graphs | 7 |
| Solder Profile | 8 |
| Ordering Nomenclature | 9 |
| Package dimension | 10 |
| Soldering Pad Pattern | 10 |
| Dimension and Polarity | 11 |
| Package Dimensions | 12 |
| Box Packaging | 13 |

Features:

- High efficacy
- CRI Options: Minimum 70, 80, 90, 95
- CCT range : 1800K to 6500K
- Low thermal resistance
- Compatible with automatic placement equipment
- Compatible with infrared reflow solder process
- RoHs and REACH compliant
- Wide viewing angle: 135 degrees

Applications

- Replacement lamps
- Panel lighting
- Down lights
- Architectural lighting

Technology Overview

Luminus mid power LEDs are lighting class solutions designed for high performance general lighting applications. These state-of-the-art LEDs allow illumination engineers and designers to develop lighting solutions with maximum efficacy, brightness and overall quality.

Reliability

Luminus mid power LED is one of the most reliable light sources in the world today. Having passed a rigorous suite of environmental and mechanical stress tests, including mechanical shock, vibration, temperature cycling and humidity, it is fully qualified for use in a wide range of high performance and high efficacy lighting applications.

REACH & RoHS Compliance

The Luminus 1616 Mid Power LED is compliant to the Restriction of Hazardous Substances Directive or RoHS.

Understanding Luminus Mid Power LED Test Specifications

Every Luminus LED is fully tested to ensure it meets the high quality standards customers have come to expect from Luminus products.

Testing Temperature

Luminus Mid Power products are measured at a case temperature of 25°C and placed into intensity, chromaticity and voltage bins as described herein.

Product Selection Table

| Nominal CCT | Minimum CRI | Ordering Part Number | Minimum Flux (Lumens) | Typical Flux (Lumens) |
|-------------|-------------|----------------------|-----------------------|-----------------------|
| 1800K | 90 | MP-1616-1103-18-90 | 32 | 38 |
| 2200K | 90 | MP-1616-1103-22-90 | 38 | 46 |
| 2700K | 80 | MP-1616-1103-27-80 | 50 | 58 |
| | 90 | MP-1616-1103-27-90 | 42 | 52 |
| | 95 | MP-1616-1103-27-95 | 36 | 43 |
| 3000K | 80 | MP-1616-1103-30-80 | 50 | 60 |
| | 90 | MP-1616-1103-30-90 | 42 | 53 |
| | 95 | MP-1616-1103-30-95 | 38 | 46 |
| 3500K | 80 | MP-1616-1103-35-80 | 54 | 62 |
| | 90 | MP-1616-1103-35-90 | 46 | 55 |
| | 95 | MP-1616-1103-35-95 | 40 | 47 |
| 4000K | 80 | MP-1616-1103-40-80 | 54 | 65 |
| | 90 | MP-1616-1103-40-90 | 46 | 58 |
| | 95 | MP-1616-1103-40-95 | 42 | 49 |
| 5000K | 80 | MP-1616-1103-50-80 | 54 | 65 |
| | 90 | MP-1616-1103-50-90 | 46 | 58 |
| 5700K | 80 | MP-1616-1103-57-80 | 54 | 65 |
| | 90 | MP-1616-1103-57-90 | 46 | 58 |
| | 95 | MP-1616-1103-57-95 | 42 | 49 |
| 6500K | 80 | MP-1616-1103-65-80 | 54 | 65 |
| | 90 | MP-1616-1103-65-90 | 46 | 58 |

*Tolerance of measurements of the luminous flux is $\pm 7\%$

* Tolerance of measurements of the CRI is ± 2

*IFP condition with Pulse: Width $\leq 100\mu\text{s}$ Duty cycle $\leq 1/10$

1616 Mid Power Operating Characteristics

Optical and Electrical Characteristics($T_c=25^\circ\text{C}$)

| Parameter | Symbol | Minimum | Typical | Maximum | Unit | Condition |
|-------------------------|-----------------|---------|---------|---------|--------------------|--------------------|
| Forward Voltage | V_f | | 3.3 | 3.5 | V | $I_f=150\text{mA}$ |
| Reverse Current | I_r | | | 10 | μA | $V_r=5\text{V}$ |
| View Angle | $2\theta^{1/2}$ | | 135 | | $^\circ$ | $I_f=150\text{mA}$ |
| Thermal Resistance | R_{th}_{j-sp} | | 22 | | $^\circ\text{C/W}$ | $I_f=150\text{mA}$ |
| Electrostatic Discharge | ESD | 1000 | | | V | |

Note 1: To prevent damage refer to operating conditions and derating curves for appropriate maximum operating conditions

Note 2: Maximum operating case temperature combined with maximum drive current defines the total maximum operating condition for the device. To prevent damage, please follow derating curves for all operating conditions.

Note 3: Mid power LEDs are designed for operation up to an absolute maximum forward drive current as specified above. Product lifetime data is specified at typical forward drive currents. Sustained operation at absolute maximum currents will result in a reduction of device lifetime compared to typical forward drive currents. Actual device lifetimes will also depend on case temperature. Refer to the current vs. case temperature derating curves for further information.

Note 4: Caution must be taken not to stare at the light emitted from these LEDs. Under special circumstances, the high intensity could damage the eye.

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

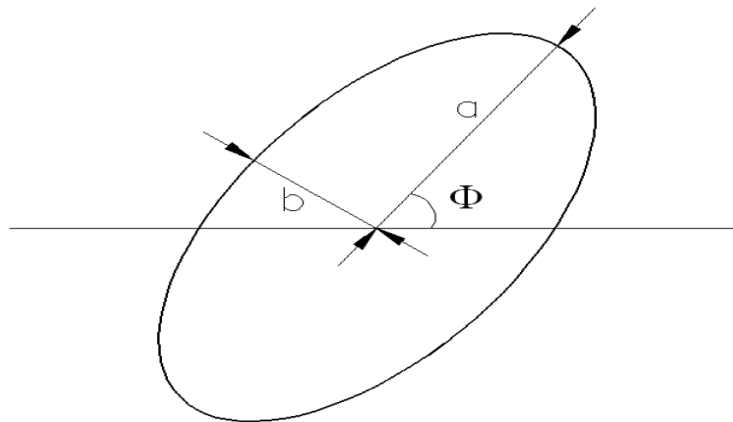
| Parameter | Symbol | Rating | Unit |
|-----------------------|-----------|---|------------------|
| Forward Current | I_f | 200 | mA |
| Pulse Forward Current | I_{fp} | 300 | mA |
| Power Dissipation | P_d | 700 | mW |
| Reverse Voltage | V_r | 5 | V |
| Operating Temperature | T_{opr} | -40~+85 | $^\circ\text{C}$ |
| Storage Temperature | T_{sta} | -40~+85 | $^\circ\text{C}$ |
| Junction Temperature | T_j | 125 | $^\circ\text{C}$ |
| Soldering Temperature | T_{sld} | 230 $^\circ\text{C}$ or 260 $^\circ\text{C}$ for 10 sec | |

*IFP condition with Pulse: Width $\leq 100\mu\text{s}$ Duty cycle $\leq 1/10$

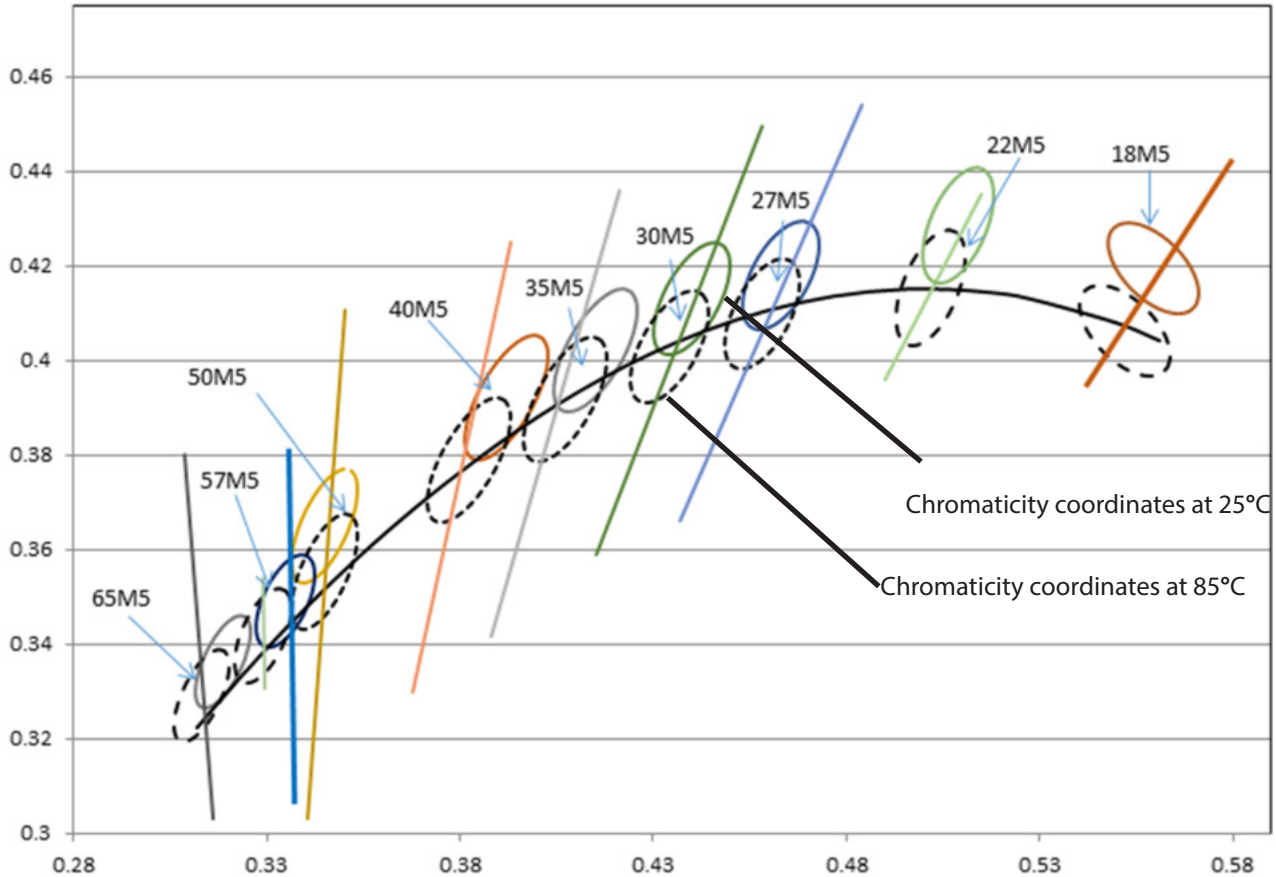
Color Bins target chromaticity @ $T_c=85\text{ }^\circ\text{C}$

| CCT (K) | Steps | Center | | Radius | | Angle(Deg) |
|---------|-------|----------|---------|----------|----------|-------------|
| | | x | y | a | b | Φ |
| 1800 | 5 | 0.5592 | 0.4196 | 0.013500 | 0.007000 | -35 |
| 2200 | 3 | 0.509873 | 0.42036 | 0.009780 | 0.004800 | 45.5 |
| | 5 | 0.509873 | 0.42036 | 0.016300 | 0.008000 | 45.5 |
| 2700 | 3 | 0.4649 | 0.4174 | 0.0081 | 0.0042 | 53.42 |
| | 5 | 0.4649 | 0.4174 | 0.0135 | 0.007 | 53.42 |
| 3000 | 3 | 0.4426 | 0.4106 | 0.00834 | 0.00408 | 53.13 |
| | 5 | 0.4426 | 0.4106 | 0.013900 | 0.006800 | 53.13 |
| 3500 | 3 | 0.4154 | 0.4025 | 0.00927 | 0.00414 | 54 |
| | 5 | 0.4154 | 0.4025 | 0.01545 | 0.0069 | 54 |
| 4000 | 3 | 0.3918 | 0.3915 | 0.00939 | 0.00402 | 53.43 |
| | 5 | 0.3918 | 0.3915 | 0.01565 | 0.0067 | 53.43 |
| 5000 | 3 | 0.353 | 0.3665 | 0.00822 | 0.00354 | 59.37 |
| | 5 | 0.353 | 0.3665 | 0.0137 | 0.0059 | 59.37 |
| 5700 | 3 | 0.3392 | 0.354 | 0.006705 | 0.0033 | 58.35 |
| | 5 | 0.3392 | 0.354 | 0.011175 | 0.0055 | 58.35 |
| 6500 | 3 | 0.31919 | 0.3388 | 0.00669 | 0.00285 | 58.34 |
| | 5 | 0.31919 | 0.3388 | 0.01115 | 0.00475 | 58.34 |

Ellipse Definition



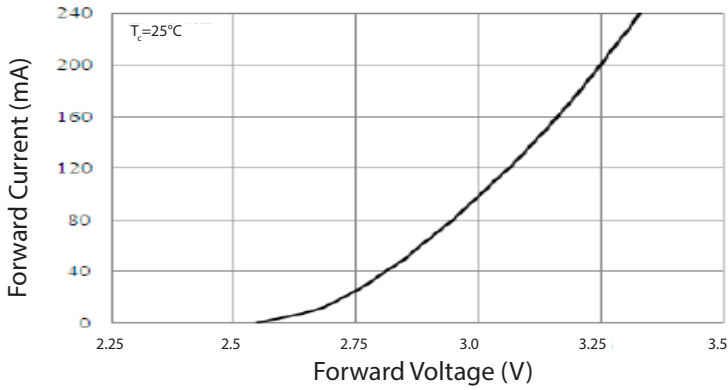
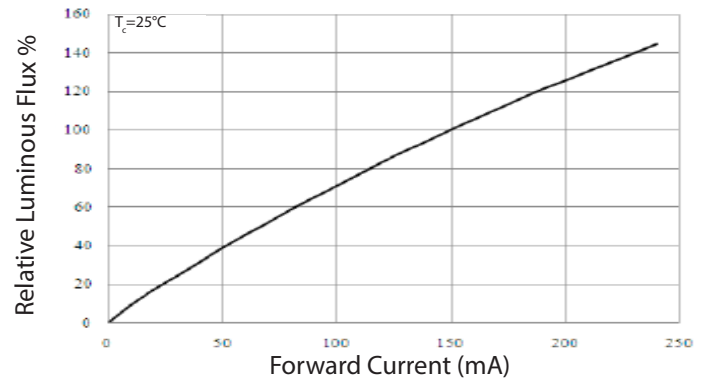
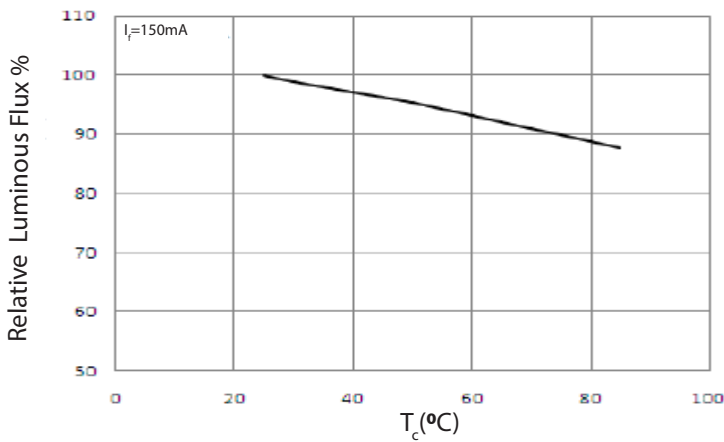
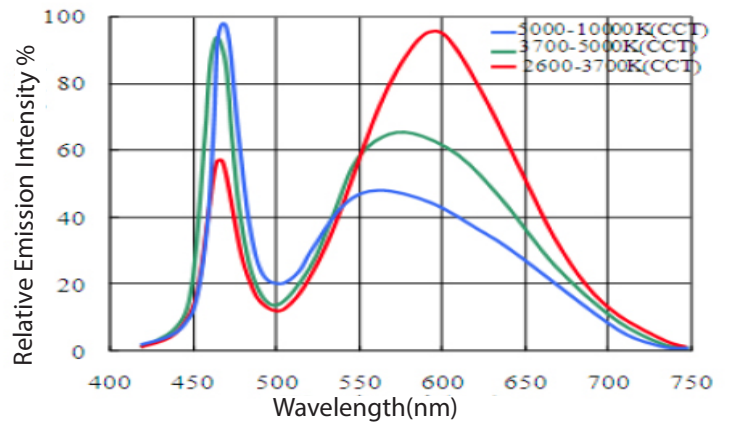
*Note: Tolerance of measurements of the chromaticity Coordinate is ± 0.005
Chromaticity coordinates as per ANSI standard.

Chromaticity Coordinate Group

Chromaticity Binning

The chart above shows the typical chromaticity shift from 25°C to 85°C. Luminus Cube MP-1616 LEDs are tested at 25°C and binned so that the resultant chromaticity is along the blackbody locus at typical operating conditions.

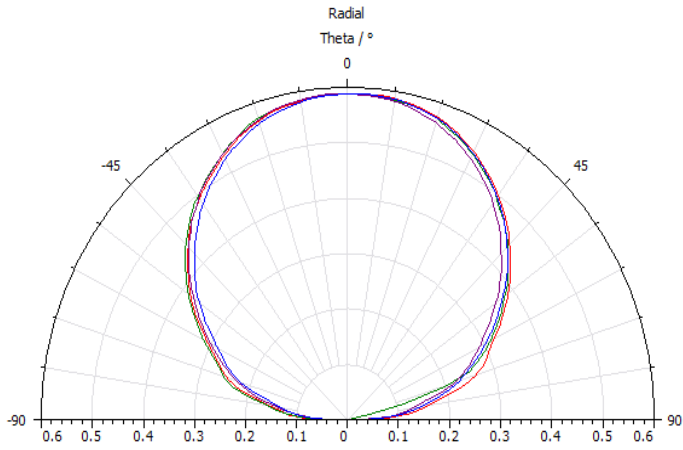
*Notes: m3 denotes a 3-step MacAdam ellipse, m5 denotes a 5-Step MacAdam ellipse.

Luminus maintains a +/- 0.01 tolerance on chromaticity (CIEx and CIEy) measurements.

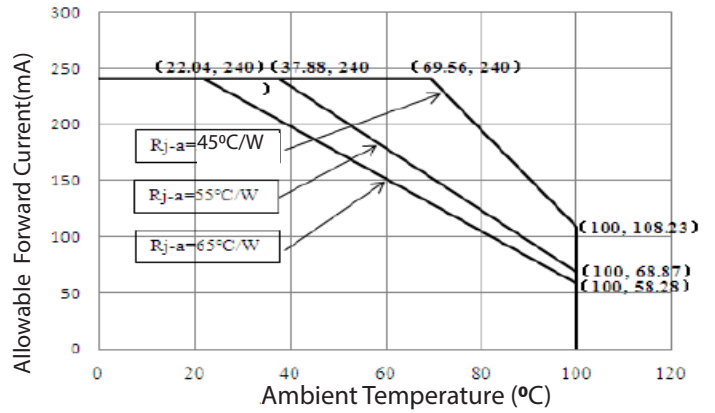
Typical optical/Electrical Characteristics Graphs
 V_f ----- I_f

 I_f ---- Relative Luminous flux

 T_c -----Relative Luminous Flux

Wavelength- Relative Emission Intensity


Typical Optical/Electrical Characteristic

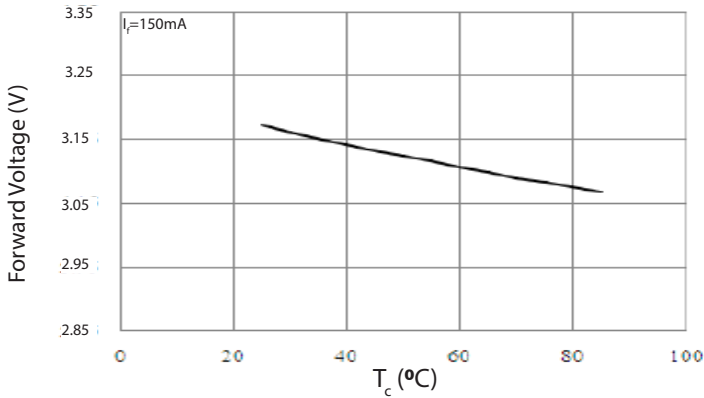
Typical Polar Radiation Pattern



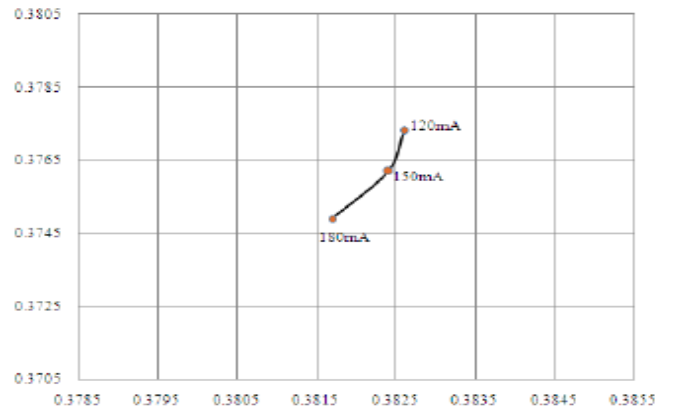
Ambient Temperature-Allowable Forward Current



T_c --Forward Voltage



Forward Current-Chromaticity Coordinate



Product Ordering and Shipping Part Number Nomenclature

All mid power products are packaged and labeled with part numbers as outlined in below. When shipped, each reel will contain only a single flux and voltage bin. The part number designation is as follows:

1616 Mid Power LEDs

| Mid Power | Package Type | Package Configurator | Nominal CCT | Minimum CRI |
|-----------|--------------|----------------------|-------------|-------------|
| MP | 1616 | 1103 | ## | ## |

Example:

The part number MP-1616-1103-30-80 refers to a 1616 mid power emitter with nominal color temperature of 3,000k and minimum CRI of 80. Please refer to page 5 for a description of available CCT and CRI combinations. Standard products are delivered in a single 5 step MacAdam ellipse chromaticity bin. 3 step products are available as a special order with additional cost. To order 3 step product, please add a "-M3" suffix after the standard part number, for example, MP-1616-1103-30-80-M3. Please contact your local Luminus sales representative for pricing information.

Note 1: CCT Codes:

Note 2: CRI Codes:

18 = 1800 k

70

27 = 2700 k

80

30 = 3000 k

90

40 = 4000 k

50 = 5000 k

Each mid power product shipped will be labeled with its specific flux and voltage bins. Not all bins listed are available in all CCTs and CRIs.

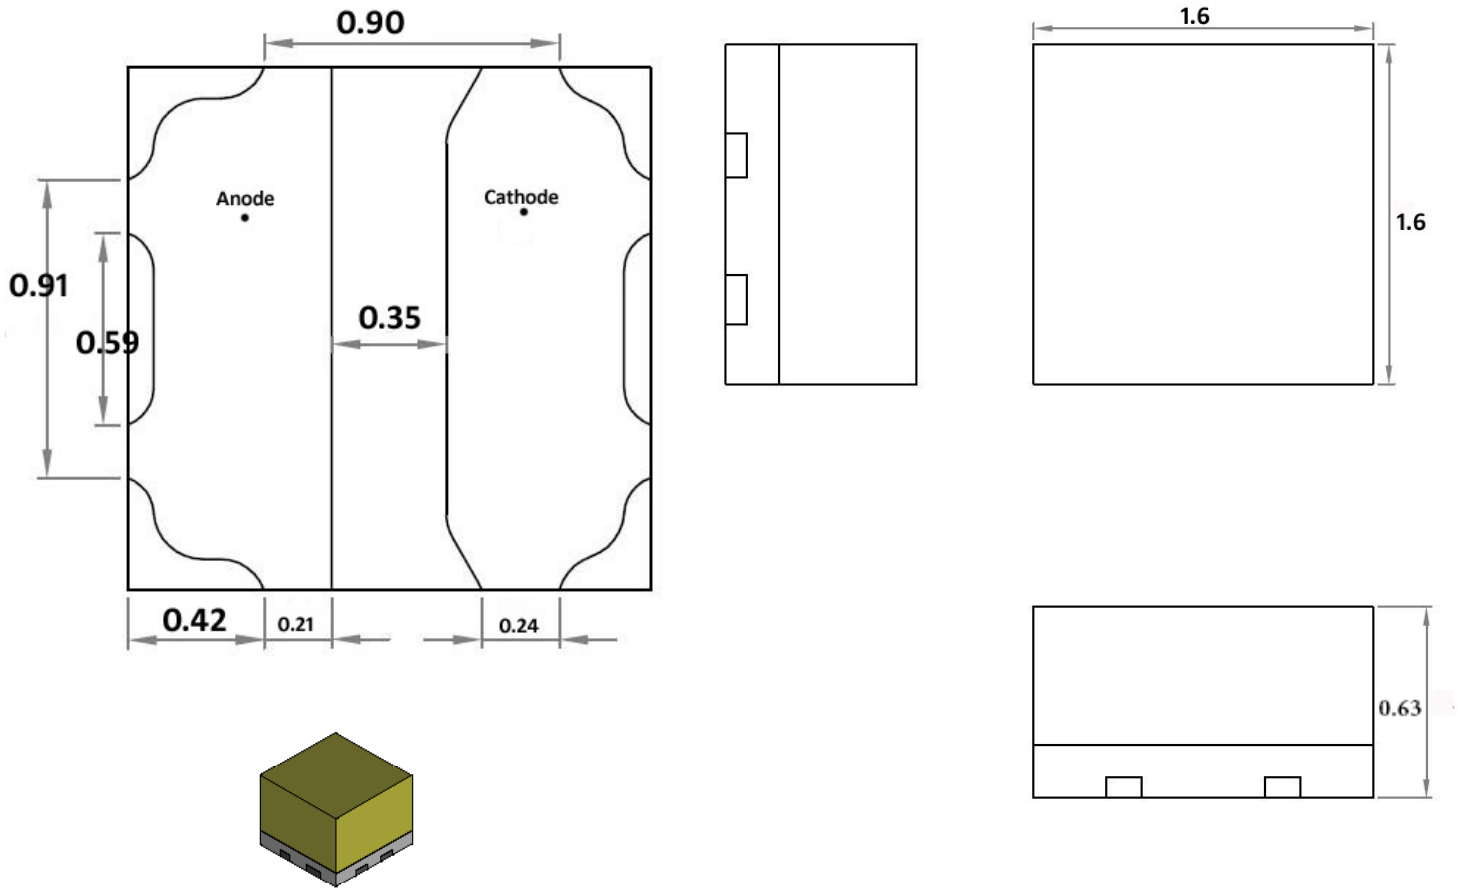
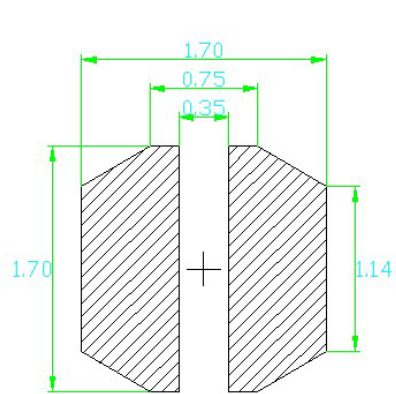
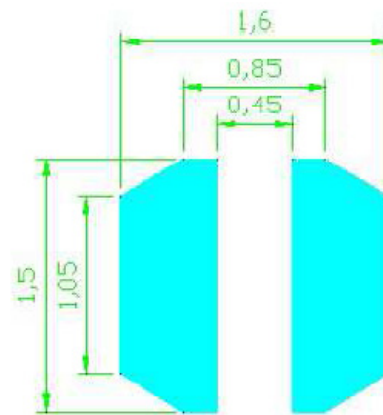
Luminus Flux Bins

| Bin Code | Minimum Flux (Lumens) | Maximum Flux (Lumens) |
|----------|-----------------------|-----------------------|
| D8 | 30 | 32 |
| D9 | 32 | 34 |
| E1 | 34 | 36 |
| E2 | 36 | 38 |
| E3 | 38 | 42 |
| E4 | 42 | 46 |
| E5 | 46 | 50 |
| E6 | 50 | 54 |
| E7 | 54 | 58 |
| E8 | 58 | 62 |
| E9 | 62 | 66 |
| F1 | 66 | 70 |
| F2 | 70 | 74 |
| F3 | 74 | 78 |

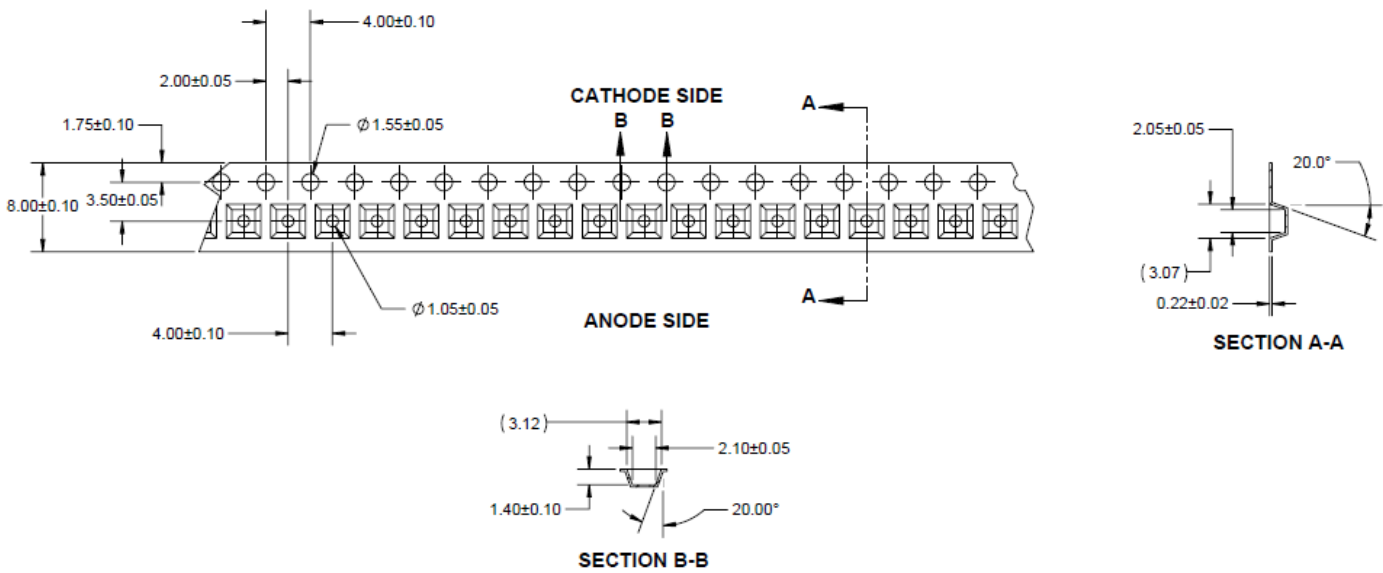
Forward Voltage Bins (T_c=25°C)

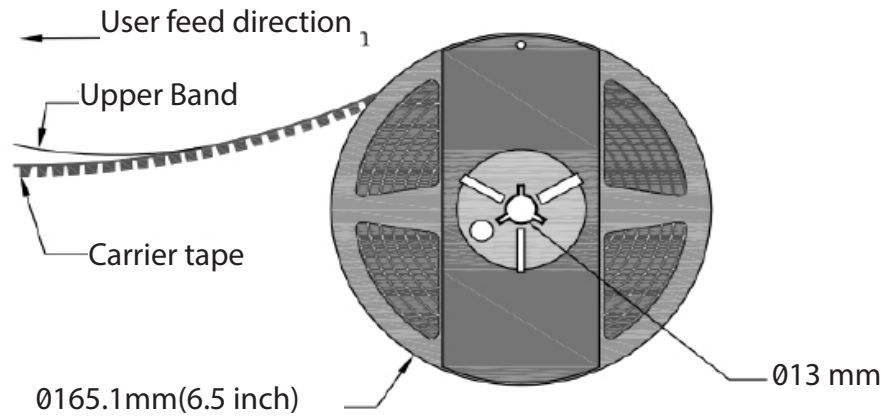
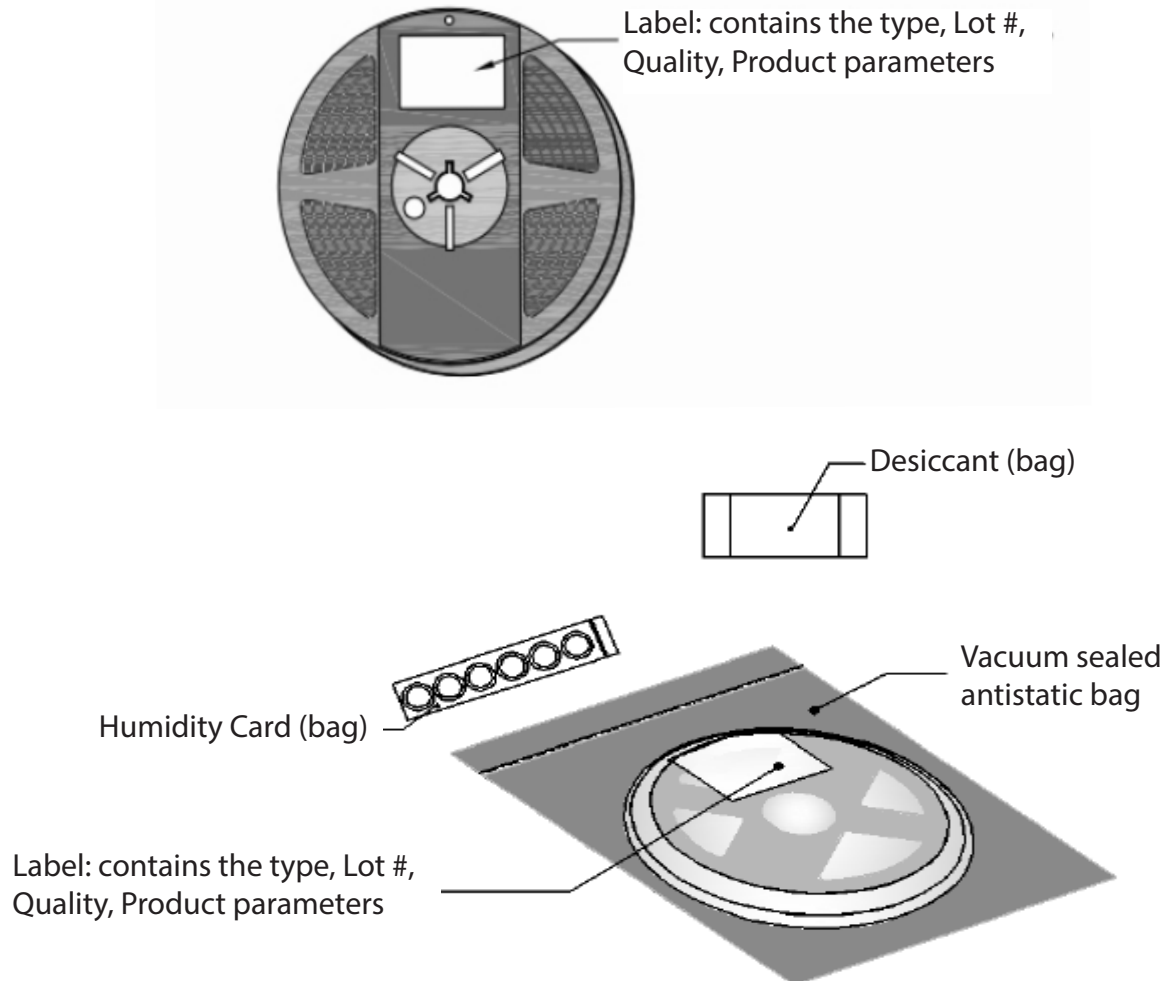
| Bin Code | Minimum Voltage (Volts) | Maximum Voltage (Volts) |
|----------|-------------------------|-------------------------|
| E | 2.8 | 2.9 |
| F | 2.9 | 3.0 |
| G | 3.0 | 3.1 |
| H | 3.1 | 3.2 |
| I | 3.2 | 3.3 |
| J | 3.3 | 3.4 |
| K | 3.4 | 3.5 |

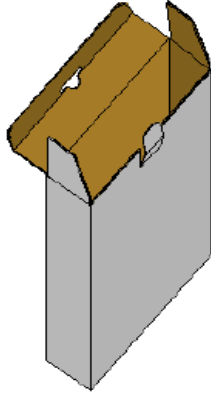
*Tolerance of measurements of the Forward Voltage is ±0.08V

Product Dimensions (mm)

Recommended Soldering Pad Pattern

Recommended Solder Pad

Recommended Stencil Opening

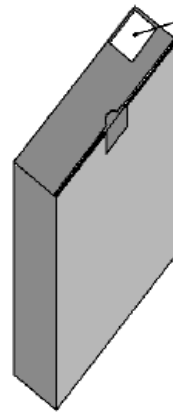
- All dimensions are in millimeters.
- Scale : 1:1
- Undefined tolerance is $\pm 0.1\text{mm}$

Dimensions of tape (mm)


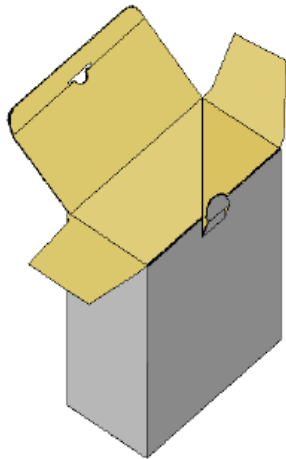
Package Dimensions of Reel (mm)

Package Dimensions of Reel (mm)


Box Packaging

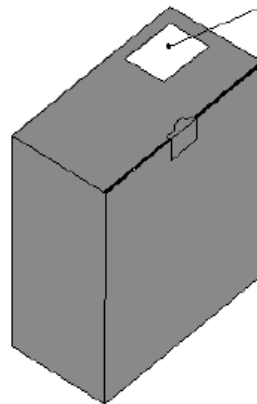
*Capacity 5 reels per box



Label: contains the type,
Lot #, Quality, Product
parameters



*Capacity 10 reels per box



Label: contains the type,
Lot #, Quality, Product
parameters

Precaution for Use

Storage:

1. This device is rated at MSL 3 per JEDEC J-STD-020 standard.
2. Recommended storage condition:
At 5 °C- 30 °C and relative humidity 60% RH in its original package
3. After this bag is opened, devices that will be applied to infrared reflow, vapor - phase reflow, or equivalent soldering process must be:
 - a) Completed within 168 hours
 - b) Stored at less than 60%RH
 - c) If not completely used within 168 hours, seal the remaining in the moisture barrier bag
4. Devices require baking before mounting, if 3 a) is not met.
5. If baking is required, devices must be baked under below conditions:
24 hours at 60C+/-5C

Static Electricity:

1. The products are sensitive to static electricity, and care should be taken when handling them.
2. Static electricity or surge voltage will damage the LEDs. It is recommended to wear a anti-electrostatic wristband or an anti-electrostatic gloves when handling the LEDs.
3. All devices, equipment and machinery must be properly grounded. It is recommended that measures be taken against surge voltage to the equipment that mounts the LEDs.

Change of History

| Date | Rev | Change details |
|------|-----|---|
| 7/30 | 02 | Adjust CCT/CRI combination and part numbers |
| | | |
| | | |
| | | |
| | | |
| | | |

Change of History

| Date | Rev | Change details |
|------|-----|---|
| 7/30 | 02 | Adjust CCT/CRI combination and part numbers |
| | | |
| | | |
| | | |
| | | |