

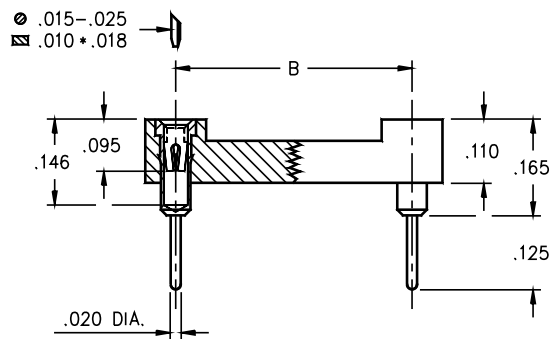


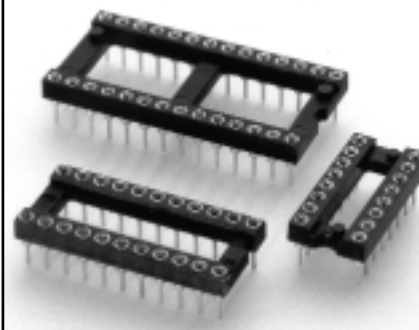

- All DIP sockets accept .015 - .025" dia. and standard IC leads.
- Lubricated contacts also available. (See page 96 for specs.)
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses Mill-Max #1001 pin. See page 134 for details.



Total number of pins				Quantity per tube	Ordering Information				
	A	B	C						
10	0.5	0.2	0.3	40	110-XX-210-41-001 110-XX-304-41-001 110-XX-306-41-001 110-XX-308-41-001 110-XX-310-41-001 110-XX-314-41-001 110-XX-316-41-001 110-XX-318-41-001 110-XX-320-41-001 110-XX-322-41-001 110-XX-324-41-001 110-XX-328-41-001 110-XX-420-41-001 110-XX-422-41-001 110-XX-424-41-001 110-XX-428-41-001 110-XX-432-41-001 110-XX-624-41-001 110-XX-628-41-001 110-XX-632-41-001 110-XX-636-41-001 110-XX-640-41-001 110-XX-642-41-001 110-XX-648-41-001 110-XX-650-41-001 110-XX-652-41-001 110-XX-950-41-001 110-XX-952-41-001 110-XX-964-41-001 Replace '001' suffix with '361' for Lubricated contacts (To be used with "99" plating code only) For High Temperature Insulators Add '100' To End Of Part Numbers				
4	0.2	0.3	0.4	102					
6	0.3	0.3	0.4	67					
8	0.4	0.3	0.4	50					
10	0.5	0.3	0.4	40					
14	0.7	0.3	0.4	28					
16	0.8	0.3	0.4	25					
18	0.9	0.3	0.4	22					
20	1.0	0.3	0.4	20					
22	1.1	0.3	0.4	18					
24	1.2	0.3	0.4	16					
28	1.4	0.3	0.4	14					
20	1.0	0.4	0.5	20					
22	1.1	0.4	0.5	18					
24	1.2	0.4	0.5	16					
28	1.4	0.4	0.5	14					
32	1.6	0.4	0.5	12					
24	1.2	0.6	0.7	16					
28	1.4	0.6	0.7	14					
32	1.6	0.6	0.7	12					
36	1.8	0.6	0.7	11					
40	2.0	0.6	0.7	10					
42	2.1	0.6	0.7	9					
48	2.4	0.6	0.7	8					
50	2.5	0.6	0.7	8					
52	2.6	0.6	0.7	7					
50	2.5	0.9	1.0	8					
52	2.6	0.9	1.0	7					
64	3.2	0.9	1.0	6					
					SPECIFY PLATING CODE XX=				
					Sleeve (Pin) 				
					Contact (Clip) 				