


Common Mode Chokes

- For the rejection of RFI and EMI on unshielded twisted pair (UTP) lines
- 1000 VDC isolation
- Custom designs in a wide variety of packages

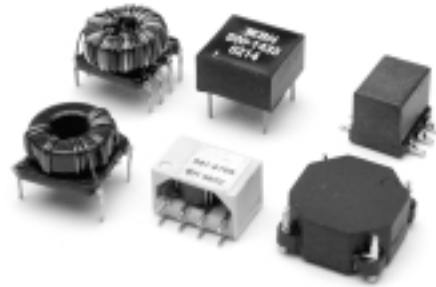

ELECTRICAL CHARACTERISTICS @ 25° C

BH PART NUMBER	TURNS RATIO	REFERENCE INDUCTANCE @ 100 KHz	Ci MAX. ANY WINDING	DCR MAX.	SCHEMATIC	PACKAGE STYLE	DIM "A"	DIM "B"
500-1164	1:1	33μH	20pF	0.05 Ω	4	4		
500-1165	1:1:1:1	27μH	30pF	0.05 Ω	1	1	0.450	0.350
500-1179	1:1:1:1	53μH	30pF	0.1 Ω	1	1	0.590	0.500
500-1266	1:1	15mH	260pF	2.0 Ω	4	1	0.580	0.500
500-1267	1:1	125μH	150pF	0.5 Ω	4	1	0.580	0.500
500-1291	1:1	53μH	30pF	0.1 Ω	4	1	0.590	0.550
500-1299	1:1	475μH	11pF	0.5 Ω	3	2		
500-1433	1:1	750μH	15pF	0.3 Ω	3	2		
500-1517	1:1:1:1	50μH	20pF	0.15 Ω	1	1	0.420	0.350
500-1532	1:1:1:1	12μH	10pF	0.1 Ω	1	1	0.450	0.360
500-1841	1:1:1:1	8μH	10pF	0.20 Ω	1	3		
500-1910	1:1	85μH	20pF	0.08 Ω	4	4		
500-2063	1:1	64μH	30pF	0.2 Ω	2	6		
500-2130	1:1	25μH	15pF	0.1 Ω	4	5		
501-0709	1:1:1:1	33μH	10pF	0.40 Ω	1	5		
501-0752	1:1	12mH	350pF	14.0 Ω	2	6		

MECHANICALS

