

R13-112 Series

Rocker Switch Single Port

■ SPECIFICATIONS

CONTACT ARRANGEMENT	SPST, SPDT
CONTACT RATING	10A 125VAC, 6A 250VAC, 16A 125VAC
CONTACT RESISTANCE	50mΩ Max.
INSULATION RESISTANCE	100mΩ Min. 500vdc
DIELECTRIC withstanding VOLTAGE	1500VAC for 1 min
CONTACTS GAP	3mm Min.


■ MATERIALS

- Body: Nylon UL flame 94V-2
- Terminal: Brass, Silver Plated

■ ORDERING INFORMATION

R13-112 **A** - 02

Terminal Type - Quick Terminal
Type of Switch

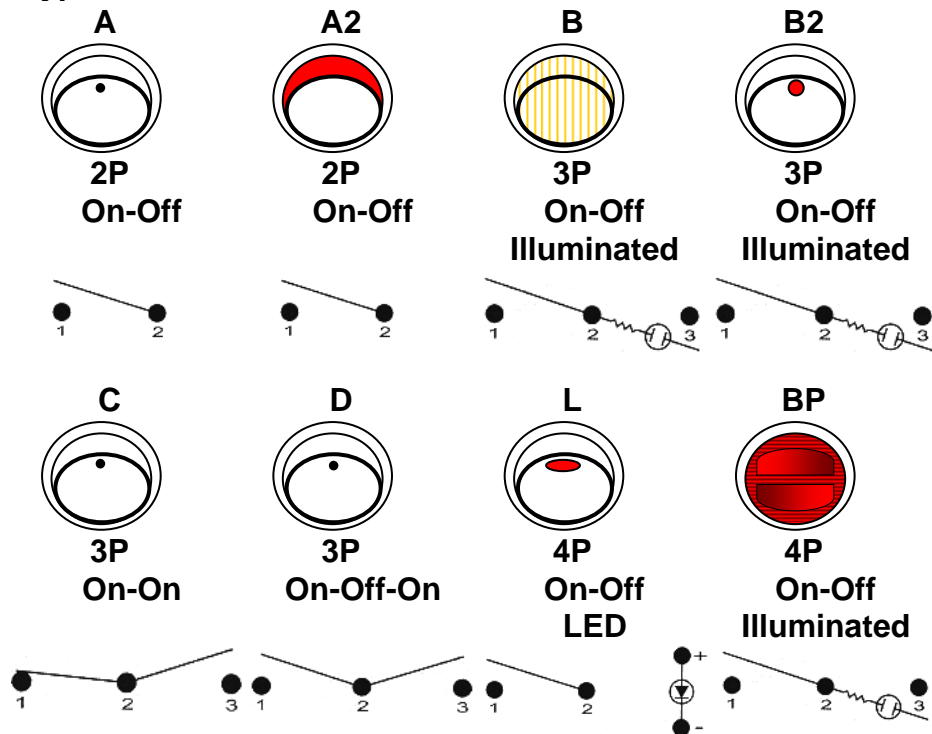

■ DIMENSION and CIRCUITRY

R13-112BP

