

LL4148


SILICON EPITAXIAL PLANAR DIODE

fast switching diode in MiniMELF case especially suited for automatic surface mounting.

Identical electrically to standard JEDEC 1N4148

These diodes are delivered taped.


Details see "Taping".

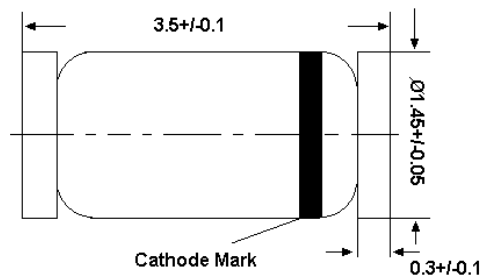

Glass case MiniMELF
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Symbol	Value	Unit
Reverse Voltage	V_R	75	V
Peak Reverse Voltage	V_{RM}	100	V
Rectified Current (Average) Half Wave Rectification with Resist. Load at $T_{amb} = 25^\circ\text{C}$ and $f \geq 50$ Hz	I_O	150 ¹⁾	mA
Surge Forward Current at $t < 1\text{s}$ and $T_j = 25^\circ\text{C}$	I_{FSM}	500	mA
Power Dissipation	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_S	-65 to +175	$^\circ\text{C}$
¹⁾ Valid provided that electrodes are kept at ambient temperature.			



®

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




ISO 14001 Certificate No. 7116
Dated : 22/07/2004

LL4148


Characteristics at $T_j = 25^\circ\text{C}$

	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage at $I_F = 10\text{mA}$	V_F	-	-	1	V
Leakage Current at $V_R = 20\text{V}$ at $V_R = 75\text{V}$ at $V_R = 20\text{V}, T_j = 150^\circ\text{C}$	I_R I_R I_R	- - -	- - -	25 5 50	nA μA μA
Reverse Breakdown Voltage tested with $100\mu\text{A}$ Pulses	$V_{(BR)R}$	100	-	-	V
Capacitance at $V_F = V_R = 0$	C_{tot}	-	-	4	pF
Voltage Rise when Switching ON tested with 50 mA Forward Pulses $t_p = 0.1\text{ s}$, Rise Time $< 30\text{ns}$, $f_p = 5\text{ to }100\text{ kHz}$	V_{fr}	-	-	2.5	V
Reverse Recovery Time from $I_F = 10\text{mA}$ to $I_R = 1\text{mA}$, $V_R = 6\text{V}$, $R_L = 100\Omega$	t_{rr}	-	-	4	ns
Thermal Resistance Junction to Ambient Air	R_{thA}	-	-	$0.35^{1)}$	K/mW
Rectification Efficiency at $f = 100\text{MHz}$, $V_{\text{RF}} = 2\text{V}$	η_v	0.45	-	-	-

¹⁾ Valid provided that electrodes are kept at ambient temperature.

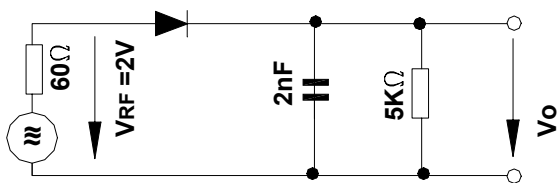

Rectification Efficiency Measurement Circuit








SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO 14001 Certificate No. 7116
Dated : 22/07/2004

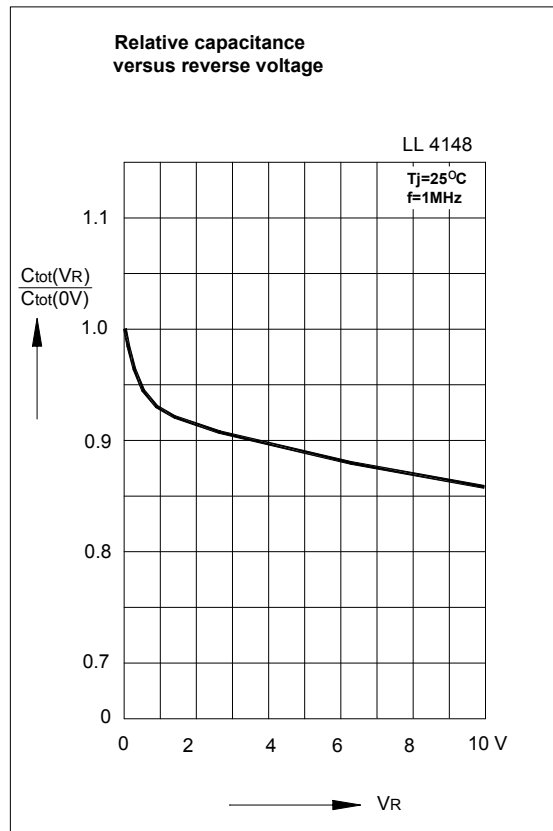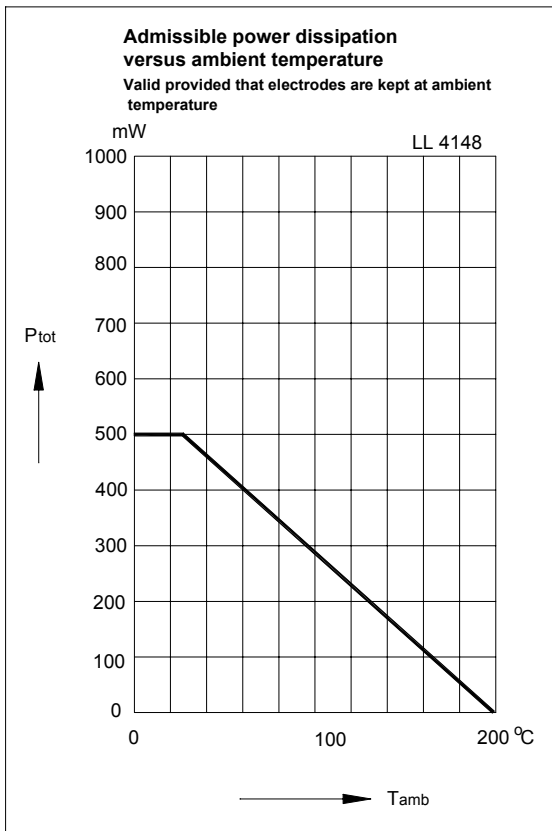
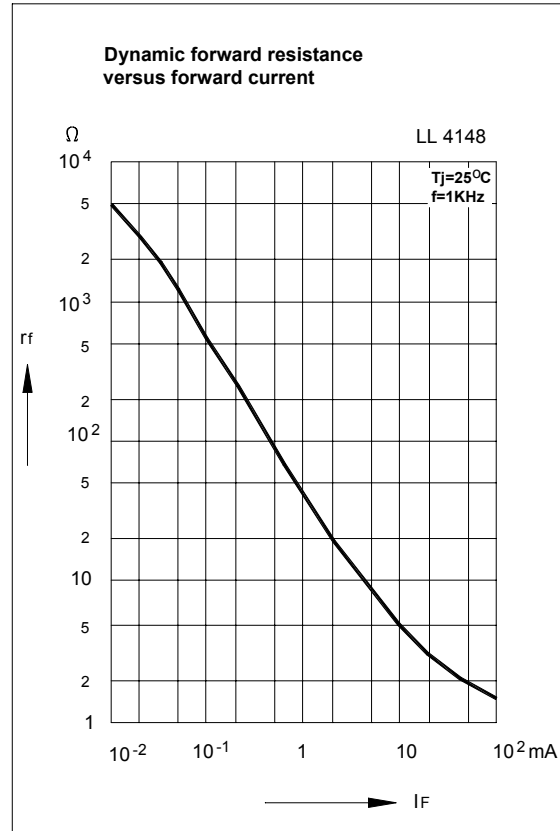
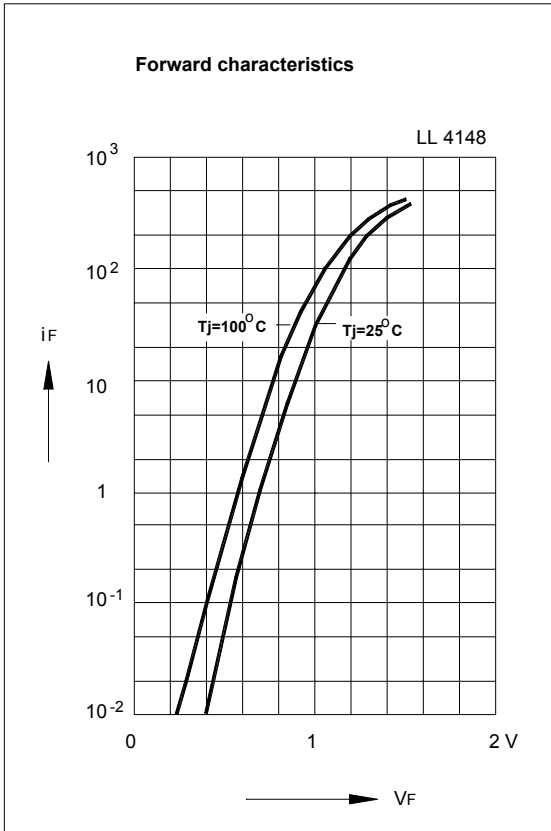


SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO 14001 Certificate No. 7116
Dated : 22/07/2004

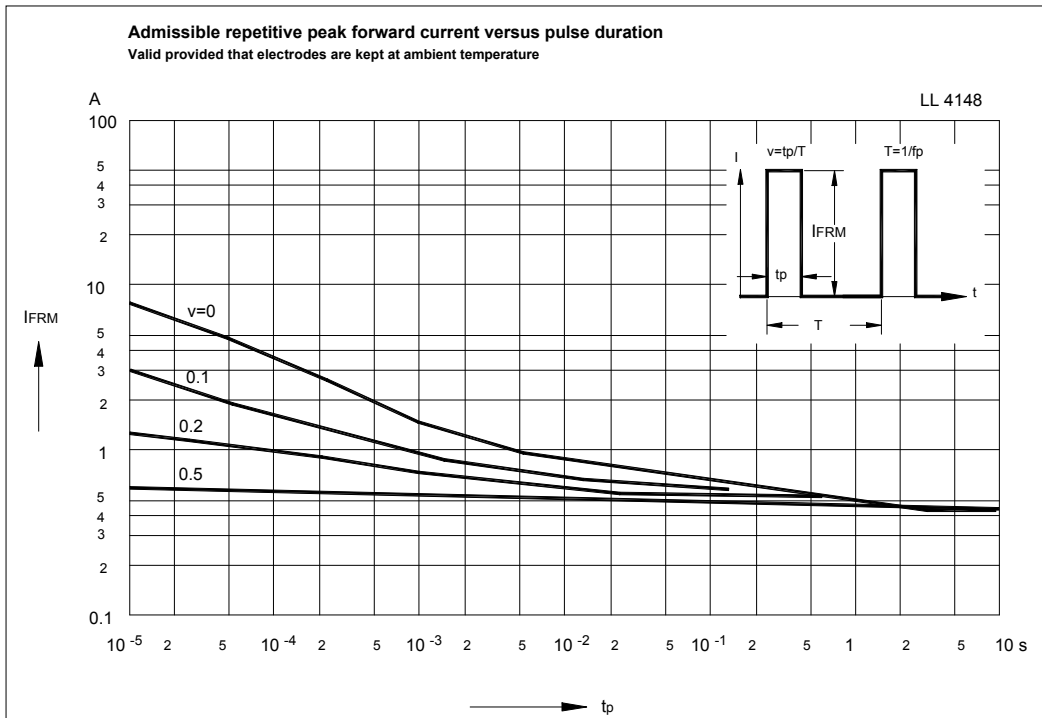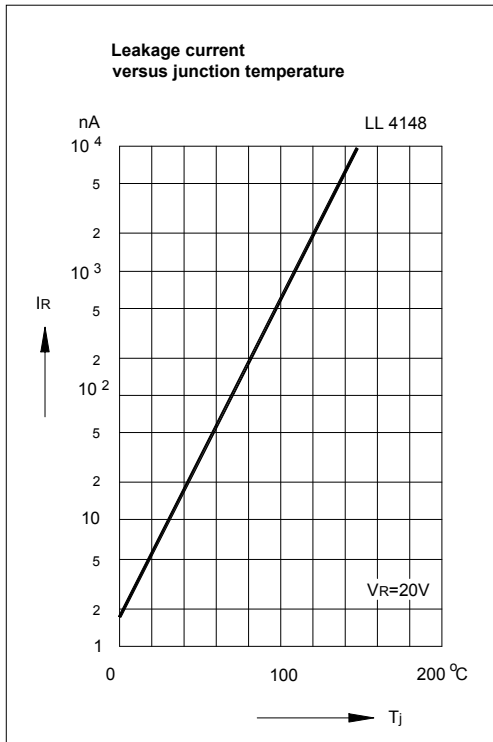

®

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO 14001 Certificate No. 7116

Dated : 22/07/2004