



萬保剛電子集團有限公司
MOBICON HOLDINGS LTD.

香港九龍新蒲崗太子道東704號新時代工貿商業中心七樓(全層)

7/F., New Trend Centre, No. 704 Prince Edward Road East, San Po Kong, Hong Kong

homepage : <http://www.mobicon.com> e-mail : Leo@mobicon.com

Tel : (852) 9096 5646

Fax : (852) 2397 0339; 2320 0525



MOBICON
Electronic Components

MEC PRODUCT SPECIFICATION

INDUCTIVE COMPONENTS

EC24 SERIES

Conformal Coated Inductor

MOBICON HOLDINGS LTD.		
Prepared By	Sign.	Approved By
Kandy Hui		C.H. Wong

www.mobicon.com

MEC

INDUCTOR SPECIFICATION

◇ **FEATURES:** The EC24 Type Choke Coil incorporates a high performance Ferrite Core in a small special structure. It is resin coated and achieves inductance values up to 1,000uH (1mH).

PART NO. :

EC24 - 6R8K


ELECTRICAL CHARACTERISTICS

1. Inductance	6.8 uH
2. Tolerance	+/- 10%
3. DC Resistance	0.45 Ohm max.
4. Rated DC Current	470 mA max.
5. Quality Factor (Q-Value)	50 min.
6. Series Resonant Frequency	30 MHz min.
7. Test Condition	At 25 ^o C, Humidity at 65 +/- 5 %
8. Test Instrument for #1, 2, 5 & 6	HP 4342A Q-Meter, test at 7.96 MHz
9. Test Instrument for #3	1 kHz 100-LCR
10. Wire Size	0.1mm

MATERIALS & CODE

1. Code	LY9 2.3 x 4
2. Size	0.1 mm
3. Material	Polyurethane Enamelled Wire (Use Type: 2)
4. UL File No.:	E84081(S) E94064(S)
5. Manufacturer:	Pacific Co. Kok Hong Co.
6. Rated Temp. Range	-20 ^o C ~ + 100 ^o C
7. Terminal Tensile Strength	1.0 kg
8. Terminal Bending Strength	0.3 kg

Dimensions (Unit = mm)

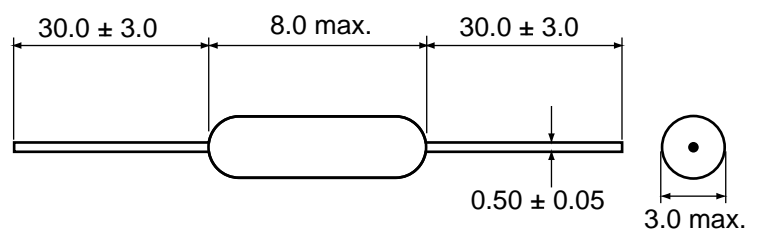

MOBICON
Electronic Components

Prepared By: Leo Wong
DOC. No: EC24-6R8k_6.8uH

REVIEW OF SPECIFICATIONS

- 1) When something get doubtful with this specifications, we shall jointly work to get an agreement.
- 2) This specification limits the quality of the components as a single unit. Please insure the component is thoroughly evaluated in your application circuit.
- 3) Please do not use this component in any application that deviates from its intended use as noted within the specification. It may cause any mishaps.
- 4) Please return one of this specification after your signature of acceptance. In case of no return within 3 months from submission date. This specification should be treated as accepted.

When using our products, the following precautions should be taken.

- (1) Safety designing of apparatus or a system allowing for failures of electronic components used in the system

In general, failures will occur in electronic components at a certain probability. MOBICON HOLDINGS LTD makes every effort to improve the quality and reliability of electronic component products. However, it is impossible to completely eliminate the probability of failures. Therefore, when using MOBICON HOLDINGS LTD electronic component products, systems should be carefully designed to ensure redundancy in the event of an accident which would result in injury or death, fire, or social damage, to ensure the prevention of the spread of fire, and the prevention of faulty operation.
- (2) Quality Level of various kinds of parts, and equipment in which the parts can be utilized

Electronic components have a standard quality level unless otherwise specified.
- (3) This specifications is subject to change without notice.

The contents of this specifications are based on data which is correct as of 2002, and they may be changed without notice. If our products are used for mass-production design, please enquire consult with a member of our company's sales staff by way of precaution.
- (4) Reprinting and copying of this specifications without prior written permission from MOBICON HOLDINGS LTD are not permitted.
- (5) Industrial Property Problems

In the event any problems associated with industrial property of a third party arising as a result of the use of our products. MOBICON HOLDINGS LTD assumes no responsibility for problems other than problems directly associated with the constitution and manufacturing method of the products.



Prepared By: Leo Wong
DOC. No: Review of Spec