



10 9 8 7 6 5 4 3 2 1

MAT'L NO.	ENG NO.	PLATING OPTION
15-24-4345	A-8981-4V5	TIN/LEAD
15-24-4745	A-8981-4V5-LF	TIN

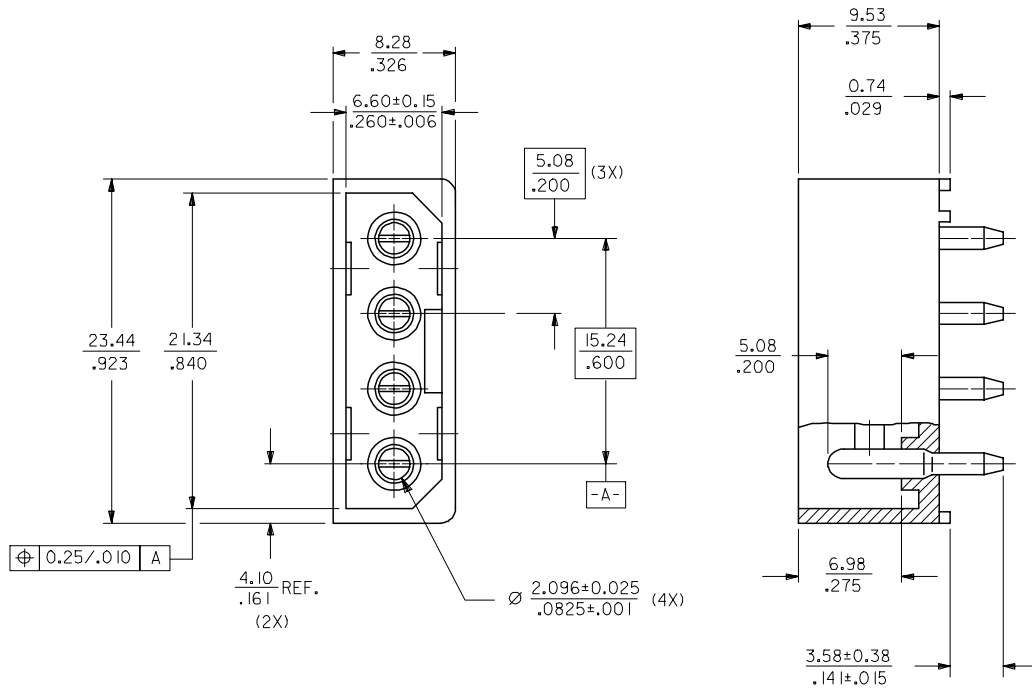

RECOMMENDED PCB HOLE LAYOUT

NOTES :

1. PLATING  
POSTPLATE 0.00254/.000100 MIN. TIN/LEAD OR TIN OVER 0.00127/.000050 MIN. NICKEL OVERALL.
2. PART TO MATE WITH 8981-4P\*.
3. PRODUCT SPEC 8981-4V\* APPLIES.
4. MATERIAL:  
HOUSING - G.F. PCT UL94V-0  
COLOR BLACK  
TERMINAL - PHOS BRONZE

ADD ASSY P/N FOR LF EC NO: S2005-0209 DRAWN:KMG0H CHKD:PTLIM APPR:SCLOW	2004/09/28 2004/09/29 2004/09/29	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION				
					MM/IN	NTS	METRIC					
					mm	INCH						
					4 PLACES ± ---	± ---						
		3 PLACES ± ---	± .008									
		2 PLACES ± 0.20	± ---									
		1 PLACE ± ---	± ---									
		ANGULAR ± 3 °										
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-8981-4V5		SHEET NO. 1 OF 1				
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

9 8 7 6 5 4 3 2 1