

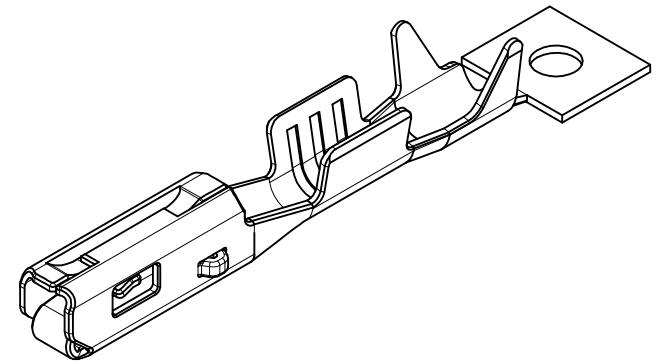
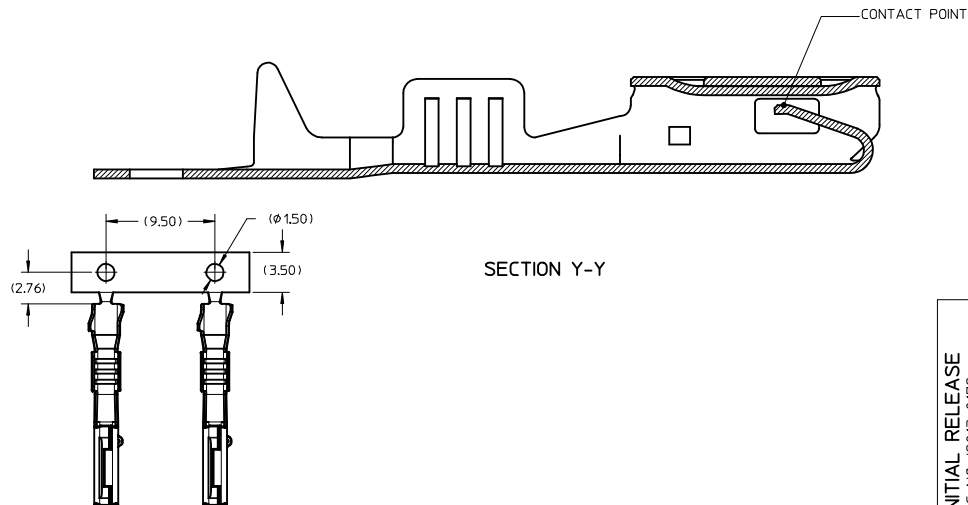
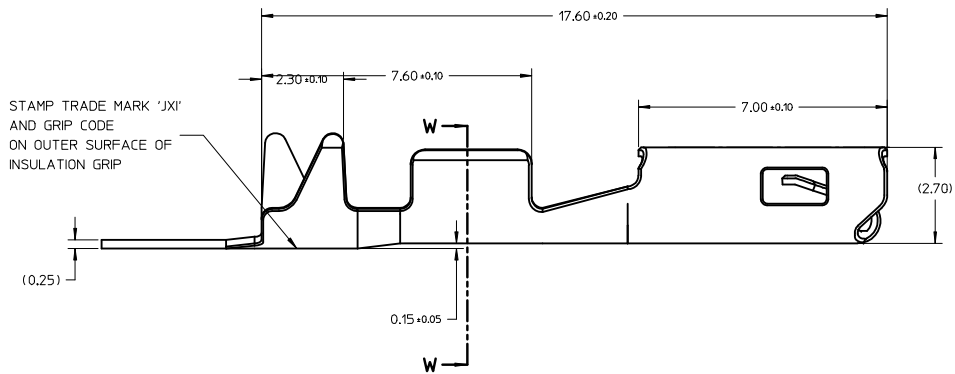


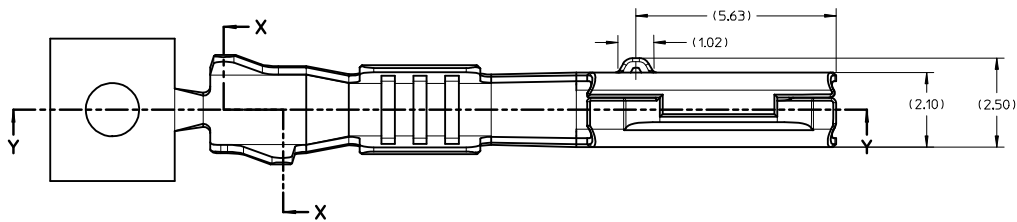


CONDUCTOR CRIMP



SECTION W-W

INSULATION CRIMP



SECTION X-X

NOTES:

1. MATERIAL: COPPER ALLOY (MIN. 1 MICRON HOT DIPPED Sn PREPLATED)
2. PACKAGING: REFER TO PK-36799-001.
3. APPLICATION SPECIFICATION: REFER TO AS-36783-001.
4. PRODUCT SPECIFICATION: REFER TO PS-36783-001/PS-36790-001(PRELIMINARY RELEASED).
5. USE WITH 36792/36807

TABLE A

MOLEX P/N	GRIP CODE	METRIC (mm ²) WIRE SIZE	DIM A	DIM B	DIM ØC	DIM ØD	DIM E	DIM F
367990001	M	0.75-1.00	2.51	3.07	1.50	1.98	2.64	3.25
367990002	S	0.35-0.50	1.91	2.47	1.00	1.54	1.94	2.60

INITIAL RELEASE EC NO: 12013-0172 DRWN: HANAKI SHINA 2013/04/23 CHKD: CHYD APPR: KPRASAD 2013/05/02 REV 2	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY PKRISHNAN01	DATE 2012/07/05	TITLE		
			4 PLACES	± ---	± ---	CHECKED BY	DATE	FEMALE TERMINAL 1.2 MM SEALED CONNECTOR SYSTEM molex		
			3 PLACES	± ---	± ---					
			2 PLACES	± ---	± ---					
			1 PLACE	± ---	± ---	APPROVED BY KPRASAD	DATE 2013/05/02			
			0 PLACE	± ---	± ---					
			ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.			SHEET NO. 1 OF 1
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE A		SD-36799-001			
			SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					