
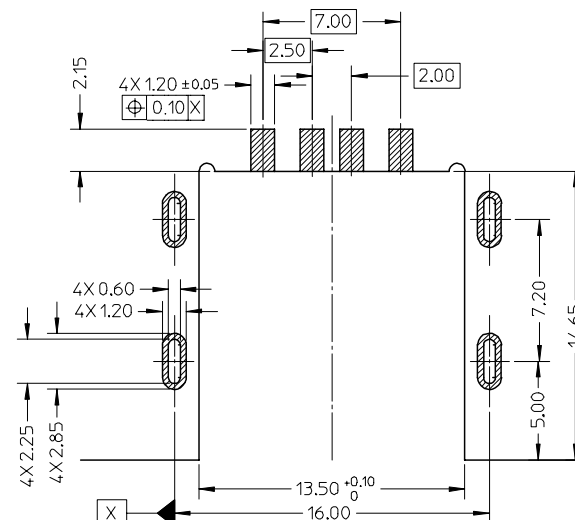
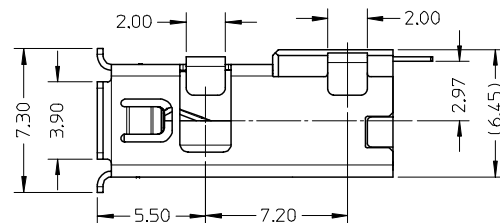
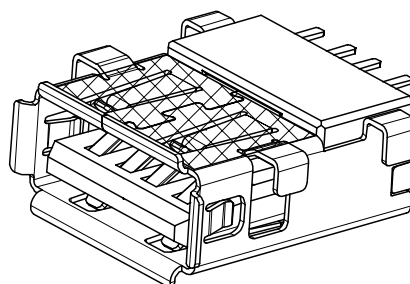
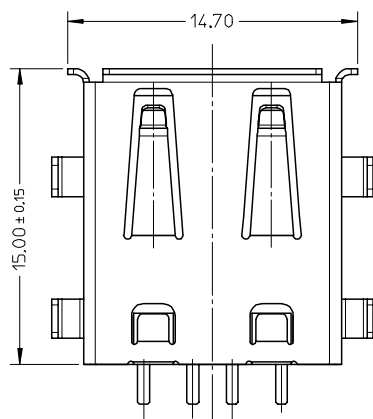
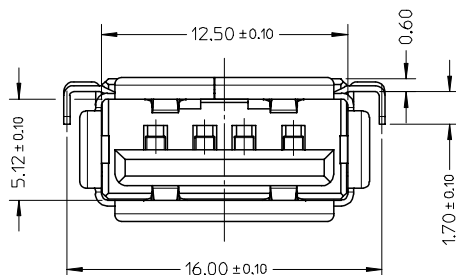


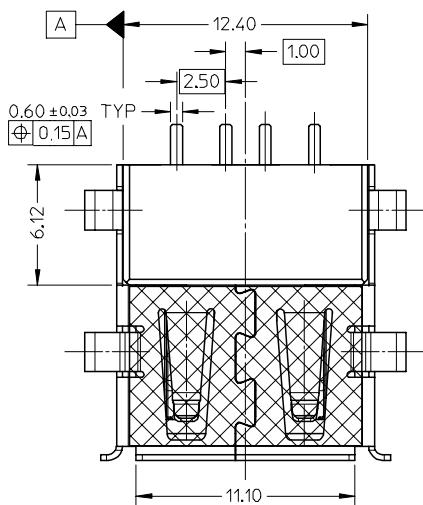

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
PCB THICKNESS=1.2mm (DEFAULT TOLERANCE=± 0.05)

NOTES:

- MATERIAL:
HOUSING: PA6T, GLASS FIBRE FILLED, UL94-V0,
COLOR: BLACK.
TERMINAL: PHOSPHOR BRONZE.
METAL SHELL: COPPER ALLOY.
- PLATING:
TERMINAL:
CONTACT AREA: GOLD FLASH PLATING.
SOLDER AREA: MATTE TIN 2 MICROMETRE MIN.
UNDERPLATING: NICKLE 1.27 MICROMETRE MIN.
METAL SHELL:
SOLDERABLE NICKEL 1.27 MICROMETRE MIN.
- PRODUCT SPECIFICATION REFERENCE TO PS-47504-001.
- COMPLIANT TO RoHS DIRECTIVE 2002/95/EC
AND ELV DIRECTIVE 2000/53/EC.

NEW PRODUCT EC NO: SH2008-0222 2007/11/15 DRWN:KWEI CHKD:RZHANG 2007/11/16 APPR: JNCHEN 2007/11/23 A		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY DATE		TITLE SINGLE USB SMT TYPE REVERSE TYPE			
				4 PLACES	± ---	± ---	KLAUS WEI 2006/08/28					
				3 PLACES	± ---	± ---	CHECKED BY DATE					
				2 PLACES	± 0.25	± ---	ROST ZHANG 2006/08/28					
				1 PLACE	± 0.30	± ---	APPROVED BY DATE		MOLEX MOLEX INCORPORATED			
				ANGULAR ± ---°			HARVEY WANG 2006/08/28					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. 475040001		DOCUMENT NO. SD-47504-001		SHEET NO. 1 OF 1	
							SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				